

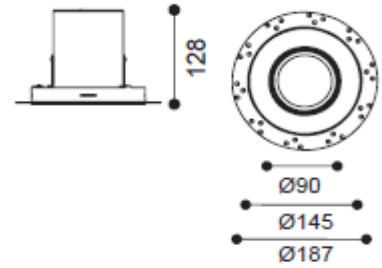
GRAEAE



Product specification

INTERIOR RECESSED DOWN LIGHT

Installation	Ceiling recessed
Cut out	Ø148mm
Dimension	D=Ø187 x H= 128mm

**Technical description**

Article number	1818.212		
LED Consumption	25.5W		
Current	700mA		
Lumen *1	2700K	3000K	4000K
Øsystem *3	2565lm	2670lm	2712lm
Voltage	-	-	-
Reflector	36.5V		
CCT	10°/20°/30°		
CRI	90+		
Driver	Remoted, I/P : 90-264V 50/60HZ O/P : 15-50V 700mA 35w Max		

Technical character

Insulation	CLASS II
Protection	IP20
Tilt	-
Rotate	-
Operating temperature	-20~40°C
Average Failure Time	L70(10k) >50000 (h)

Materials

Luminaire	extruded aluminum
Reflector	LENS
Baffle	plastic-PC
Body color available	black/white
Inner Baffle color available	black/white/copper/piano black
Outer Baffle color available	black/white/copper

Package

inner box	-	mm 1 kg
outer box	-	mm 0 kg / 0 in 1

Photometric**Accessories**

None

Remarks

*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.