ARISE


Ø122

ARTEC-TB-III

2



Product specification

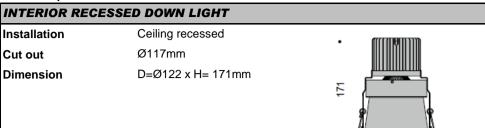

Technical description				
Article number	1418.180.			
LED Consumption	25.5W			
Current	700mA			
ССТ	2700K	3000K	4000K	
Lumen ^{*1}	2565lm	2670lm	2712lm	
Øsystem ^{*3}	-	-	-	
Voltage	36.5V			
Reflector	30°			
CRI	90+			
Driver	Remoted , I/P : 90-264V 50/60HZ			
	O/P:15-{	O/P: 15-50V 700mA 35w Max		

Technical character		
Insulation	CLASS III	
Protection	IP 20	
Tilt	-	
Rotate	-	
Operating temperature	-20~40 °C	
Average Failure Time	L70(10k) >60000 (h)	

Materials		
Luminaire	aluminum die cast	
Reflector	aluminum material	
Heat sink	forged aluminum	
Color available (Bezel)	white / black	
Color available (Reflector)	white / silver / black	

Package

-		
inner box	-	mm 1 kg
outer box	-	mm 0 kg / 0 in 1

Photometric

Accessories

None

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.