



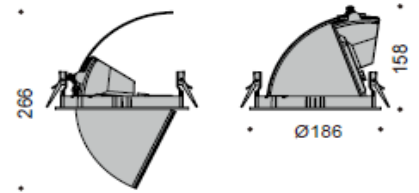
## SCOOP-186-II



## Product specification

**INTERIOR RECESSED DOWN LIGHT**

Installation	Ceiling recessed
Cut out	Ø175mm
Dimension	D=Ø186 x H= 158mm

**Technical description**

Article number	1518.134		
LED Consumption	39.1W		
Current	1050mA		
CCT	2700K	3000K	4000K
Lumen <sup>*1</sup>	4545lm	4738lm	4859lm
Øsystem <sup>*3</sup>	-	-	-
Voltage	37.3V		
Reflector	12°/24°/40°		
CRI	80+		
Driver	Remoted, I/P : 90-264V 50/60HZ O/P :		

**Technical character**

Insulation	CLASS I
Protection	IP 20
Tilt	0~70°
Rotate	0~355°
Operating temperature	-20~40 °C
Average Failure Time	L70(10k) >60000 (h)

**Materials**

Luminaire	aluminum die cast
Reflector	plastic-PC
Heat sink	aluminum die cast
Color available	white / black

**Package**

inner box	-	mm 1 kg
outer box	-	mm 0 kg / 0 in 1

**Photometric****Accessories**

None

**Remarks**

\*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

\*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

