


ASPHO



Product specification

INTERIOR RECESSED DOWN LIGHT

Installation	Ceiling recessed
Cut out	Ø168mm
Dimension	D=Ø184 x H= 179mm

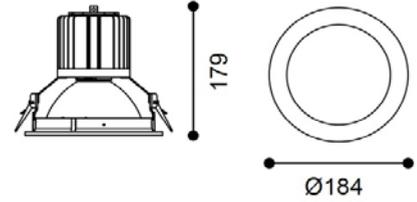

Technical description

Article number	1618.197		
LED Consumption	39.1W		
Current	1050mA		
CCT	2700K	3000K	4000K
Lumen ^{*1}	3903lm	4058lm	4121lm
Øsystem^{*3}	-	-	-
Voltage	37.3V		
Reflector	35°		
CRI	90+		
Driver	Remoted		

Technical character

Insulation	CLASS II
Protection	IP 54
Tilt	-
Rotate	-
Operating temperature	-20~40 °C
Average Failure Time	L70(10k) >60000 (h)

Materials

Luminaire	aluminum die cast
Reflector	anodized aluminum
Heat sink	forged aluminum
Color available	white / black

Package

inner box	mm 0 kg
outer box	mm 0 kg / 0 in 1

Photometric

Accessories

None

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

