

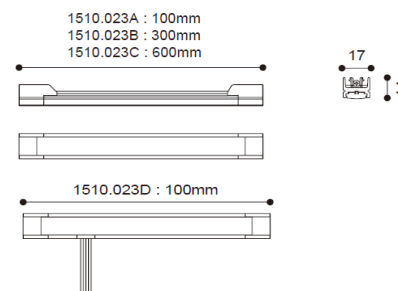
SHUTTLE-L



Product specification

INTERIOR LED LINEAR LIGHT

| | |
|---------------------|--------------|
| Installation | System light |
| Cut out | - |
| Dimension | D=17x14mm |

**Technical description**

| | | | | |
|-----------------------------|-----------------------------------------------|-----------|-----------|-----------|
| Article number | 1510.023A | 1510.023B | 1510.023C | 1510.023D |
| LED Consumption | 1W | 4W | 8W | 1W |
| Current | 60mA | | | |
| CCT | 3000K | 3000K | 3000K | 3000K |
| Lumen ^{*1} | 110lm | 330lm | 660lm | 110lm |
| Øsystem^{*3} | - | - | - | |
| Voltage | 24V | | | |
| Reflector | 120° | | | |
| CRI | 80+ | | | |
| Driver | Remoted, I/P : 90-264V 50/60HZ O/P : 24Vdc | | | |

Technical character

| | |
|------------------------------|--------------------|
| Insulation | CLASS I |
| Protection | IP 20 |
| Tilt | - |
| Rotate | - |
| Operating temperature | -20~40 °C |
| Average Failure Time | L70(6k) >36000 (h) |

Materials

| | |
|------------------------|-----------------------------------------------------------|
| Luminaire | aluminum extruded body and plastic end cap PC diffuser |
| Reflector | - |
| Heat sink | aluminum extruded |
| Color available | anodized aluminum / Black |

Package

| | |
|-----------|------------------|
| inner box | mm 1 kg |
| outer box | mm 0 kg / 0 in 1 |

Accessories

None

Remarks

*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

Photometric