

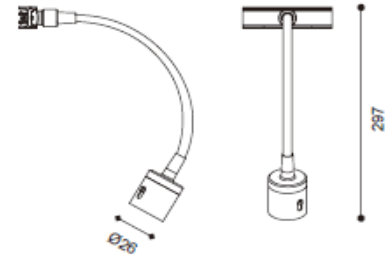
SHUTTLE-N



Product specification

INTERIOR SYSTEM LIGHT

Installation	system light
Cut out	-
Dimension	D=26x297mm

**Technical description**

Article number	1617.502
LED Consumption	2.2W
Current	-
CCT	3000K
Lumen ^{*1}	50-70lm
Øsystem ^{*3}	-
Voltage	24V
Beam Angle	8°-20°
CRI	80+
Driver	Remoted, I/P : 90-264V 50/60HZ O/P : 24Vdc

Technical character

Insulation	CLASS I
Protection	IP 20
Tilt	0~45°
Rotate	0~360°
Operating temperature	-20~40 °C
Average Failure Time	L70(6k) >36000 (h)

Materials

Luminaire	aluminum
Reflector	LENS
Heat sink	-
Color available	Black

Package

inner box	mm 1 kg
outer box	mm 0 kg / 0 in 1

Accessories

None

Remarks

*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

Photometric

Zoom in 8° Zoom out 20°

