

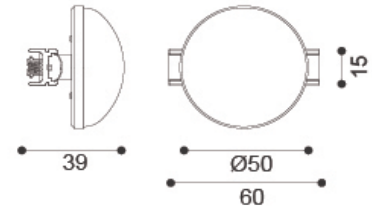
## LINEA-B



## Product specification

## INTERIOR TRACK LIGHT

**Installation** system light

**Cut out**
**Dimension**


## Technical description

<b>Article number</b>	1768.101
<b>LED Consumption</b>	4W
<b>Current</b>	
<b>CCT</b>	3000K
<b>Lumen <sup>*1</sup></b>	
<b>Øsystem<sup>*3</sup></b>	320 (lm)
<b>Voltage</b>	24V DC
<b>Reflector</b>	125°
<b>CRI</b>	80+

**Driver**

## Technical character

<b>Insulation</b>	CLASS III
<b>Protection</b>	IP 20
<b>Tilt</b>	-
<b>Rotate</b>	-
<b>Operating temperature</b>	-20~40 °C
<b>Average Failure Time</b>	L70(6k) >36000 (h)

## Materials

<b>Luminaire</b>	Aluminum body and plastic base PC diffuser
<b>Reflector</b>	
<b>Heat sink</b>	Aluminum
<b>Color available</b>	Black / Anodized Alum.

## Package

<b>inner box</b>	mm 1 kg
<b>outer box</b>	mm 0 kg / 0 in 1

## Photometric

## Accessories

None

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

\*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.