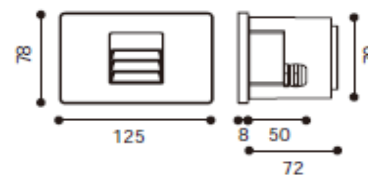


## KUMA

## Product specification

**INTERIOR RECESSED DOWN LIGHT**

Installation	Wall recessed
Cut out	Ø74mm
Dimension	D=125 x 78 x H= 72mm

**Technical description**

Article number	1495.114A
LED Consumption	2.6W
Current	-
CCT	2700K
Lumen <sup>*1</sup>	140lm
Øsystem <sup>*3</sup>	-
Voltage	230Vac
Reflector	120°
CRI	80+
Driver	

**Technical character**

Insulation	CLASS I
Protection	IP 65
Tilt	-
Rotate	-
Operating temperature	-20~35 °C
Average Failure Time	L70(6k) >36000 (h)

**Materials**

Luminaire	aluminum and steel bracket tempered glass
Reflector	None
Heat sink	aluminum die casting
Color available	white / black / brown

**Package**

inner box	mm 1 kg
outer box	mm 0 kg / 0 in 1

**Photometric****Accessories****Remarks**

\*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

\*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

