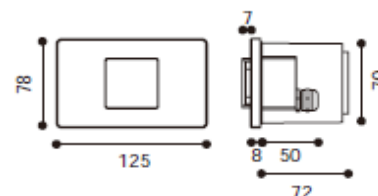


KUMA

Product specification

**INTERIOR RECESSED DOWN LIGHT**

| | |
|---------------------|----------------------|
| Installation | Wall recessed |
| Cut out | Ø74mm |
| Dimension | D=125 x 78 x H= 72mm |

**Technical description**

| | |
|-----------------|-----------|
| Article number | 1595.124A |
| LED Consumption | 2.6W |
| Current | - |
| CCT | 2700K |
| Lumen *1 | 140lm |
| Øsystem*3 | - |
| Voltage | 230Vac |
| Reflector | 120° |
| CRI | 80+ |
| Driver | |

Technical character

| | |
|-----------------------|--------------------|
| Insulation | CLASS I |
| Protection | IP 65 |
| Tilt | - |
| Rotate | - |
| Operating temperature | -20~35 °C |
| Average Failure Time | L70(6k) >36000 (h) |

Materials

| | |
|-----------------|----------------------------|
| Luminaire | aluminum and steel bracket |
| Reflector | None |
| Heat sink | aluminum die casting |
| Color available | white / black / brown |

Package

| | |
|-----------|------------------|
| inner box | mm 1 kg |
| outer box | mm 0 kg / 0 in 1 |

Photometric**Accessories**

Mounting bracket Recessed can

Remarks

*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

