

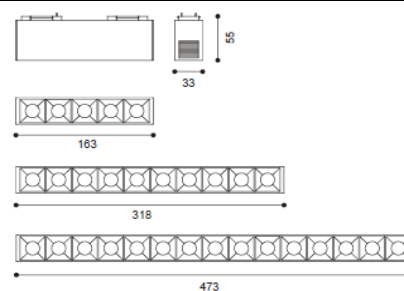
SLIMDUET-K



Product specification

INTERIOR SYSTEM LIGHT

Installation	Track light
Cut out	-
Dimension	55x33mm L:163/318/473mm

**Technical description**

Article number	1617.405A	1617.405B	1617.405C
LED Consumption	11W	22W	33W
Current	-	-	-
CCT	3000K	3000K	3000K
Lumen ^{*1}	200lm x5	200lm x10	200lm x15
Øsystem ^{*3}	-	-	-
Voltage	48vdc		
Reflector	10°/15°/30°		
CRI	90+		
Driver	-		

Technical character

Insulation	CLASS I
Protection	IP 20
Tilt	-
Rotate	-
Operating temperature	-20~40 °C
Average Failure Time	L70(6k) >36000 (h)

Materials

Luminaire	aluminum extruded
Reflector	Lens
Heat sink	aluminum extruded
Color available(body)	white / black
Color available(Baffle)	white / black / Piano black

Package

inner box	mm 1 kg
outer box	mm 0 kg / 0 in 1

Photometric**Accessories**

None

Remarks

*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

