
BRISE

POLE-KC



Product specification

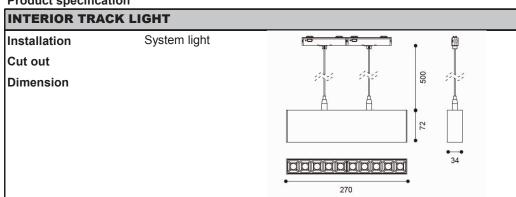

Technical description		
Article number	1917.401	
LED Consumption	22W	
Current	-	
ССТ	3000K	
Lumen *1	2000 (lm)	
Øsystem ^{*3}	-	
Voltage	24V DC	
Reflector	15°/25°/40°	
CRI	90+	

Technical character		
Insulation	CLASS III	
Protection	IP 20	
Tilt	-	
Rotate	-	
Operating temperature	-20~40 °C	
Average Failure Time	L70(6k) >36000 (h)	

Materials		
Luminaire	aluminum extruded body and plastic end cap	
Reflector	PMMA Lens	
Heat sink	aluminum extruded	
Color available	white / black / piano black	

Package

inner box	mm 1 kg
outer box	mm 0 kg / 0 in 1


Accessories

None

Remarks



Photometric



- *1. LUMEN : for LED chip test result based on Tc=85°C.
 - This is the ideal (Maximum) lumen. This lumen information is from the LED supplier
- *3. LUMEN(Øsystem) (Total FLUX): this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.