
ARISE

POLE-C



Product specification

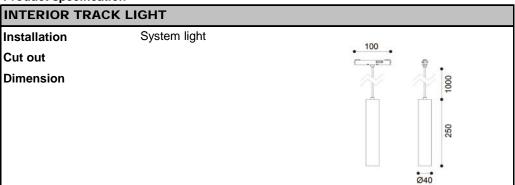

Technical description		
Article number	1716.100	
LED Consumption	6.4W	
Current	-	
ССТ	3000K	
Lumen *1	626 (lm)	
Øsystem ^{*3}	-	
Voltage	48V DC	
Reflector	10°/20°	
CRI	90+	
Driver		

Technical character		
Insulation	CLASS III	
Protection	IP 20	
Tilt	-	
Rotate	-	
Operating temperature	-20~40 °C	
Average Failure Time	L70(6k) >36000 (h)	

Materials		
Luminaire	aluminum extruded body and plastic end cap	
Reflector	PMMA Lens	
Heat sink	aluminum extruded	
Color available	white / black	

Package

 inner box
 mm 1 kg

 outer box
 mm 0 kg / 0 in 1


Accessories


None

Remarks



Photometric





- *1. LUMEN : for LED chip test result based on Tc=85°C.
 - This is the ideal (Maximum) lumen. This lumen information is from the LED supplier
- *3. LUMEN(Øsystem) (Total FLUX): this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.