

## **APOLLO-III**

Provide more output than standard T5 LED fixture with stronger mechanism for better heat dissipation. suitable to use in walkway, corridor or indirect lighting purpose.

Installation : ceiling and wall mounted.

Insulation : Class II, 230V AC.

Protection : IP20


Approval : CE



# APOLLO-III

## Product Specification

Luminaire : aluminum extruded  
 Diffuser : Anti-UV plastic-PC  
 Driver : PF>0.9 , THD<20%  
 CCT range : 3 step MacAdam  
 Energy efficiency : >80 lm/W  
 Max. connection : 250W

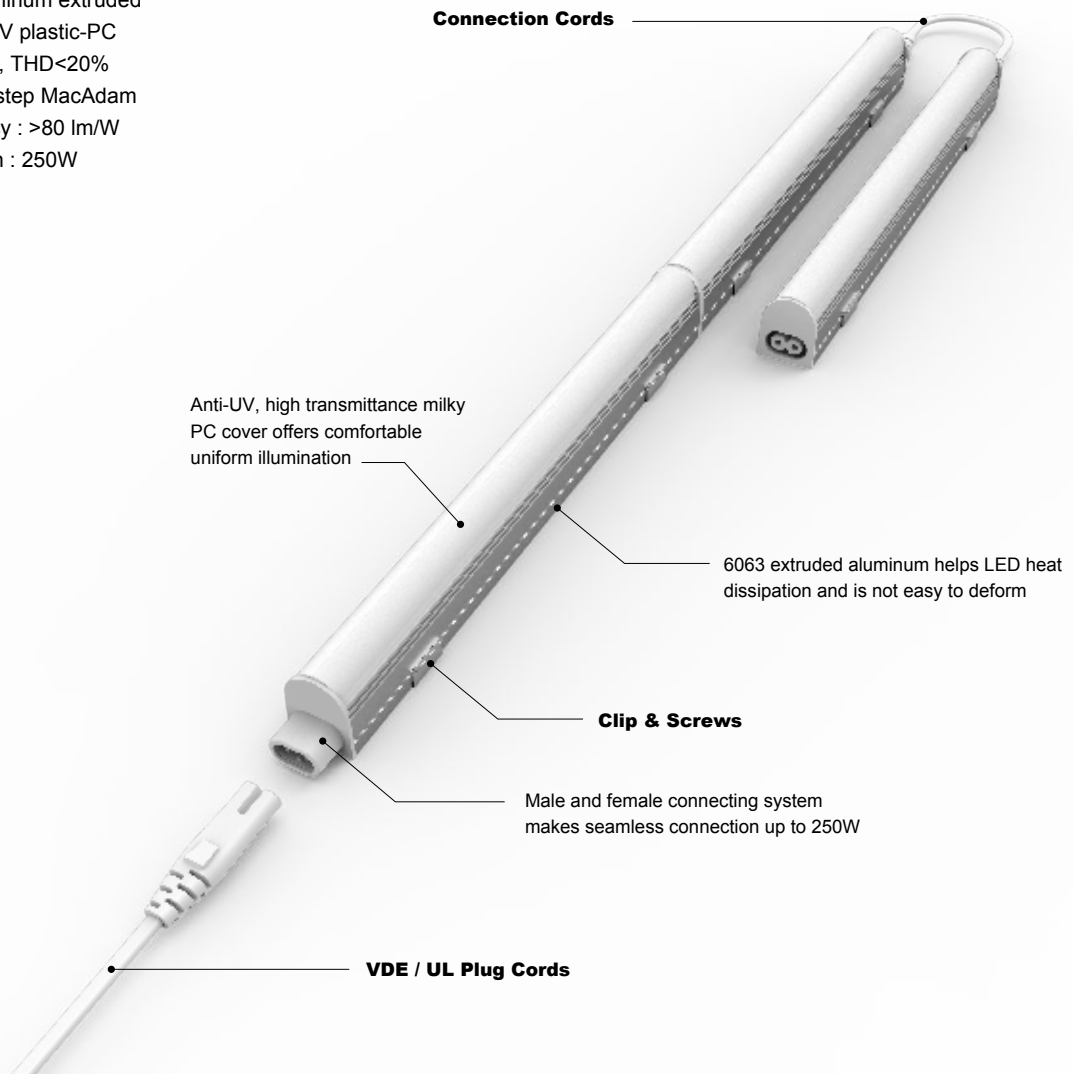

Colours  Anodized alum.



VDE Plug cords  
 EP-14-200 Length:200cm



VDE Connection cords  
 CSE-14-25 Length:25cm  
 CSE-14-50 Length:50cm



Clip & Screws  
 NS-0479




UL Plug cords  
 AP-14-200 Length:200cm



UL Connection cords  
 CSA-14-25 Length:25cm  
 CSA-14-50 Length:50cm



V-Clip & Screws  
 NS-0386

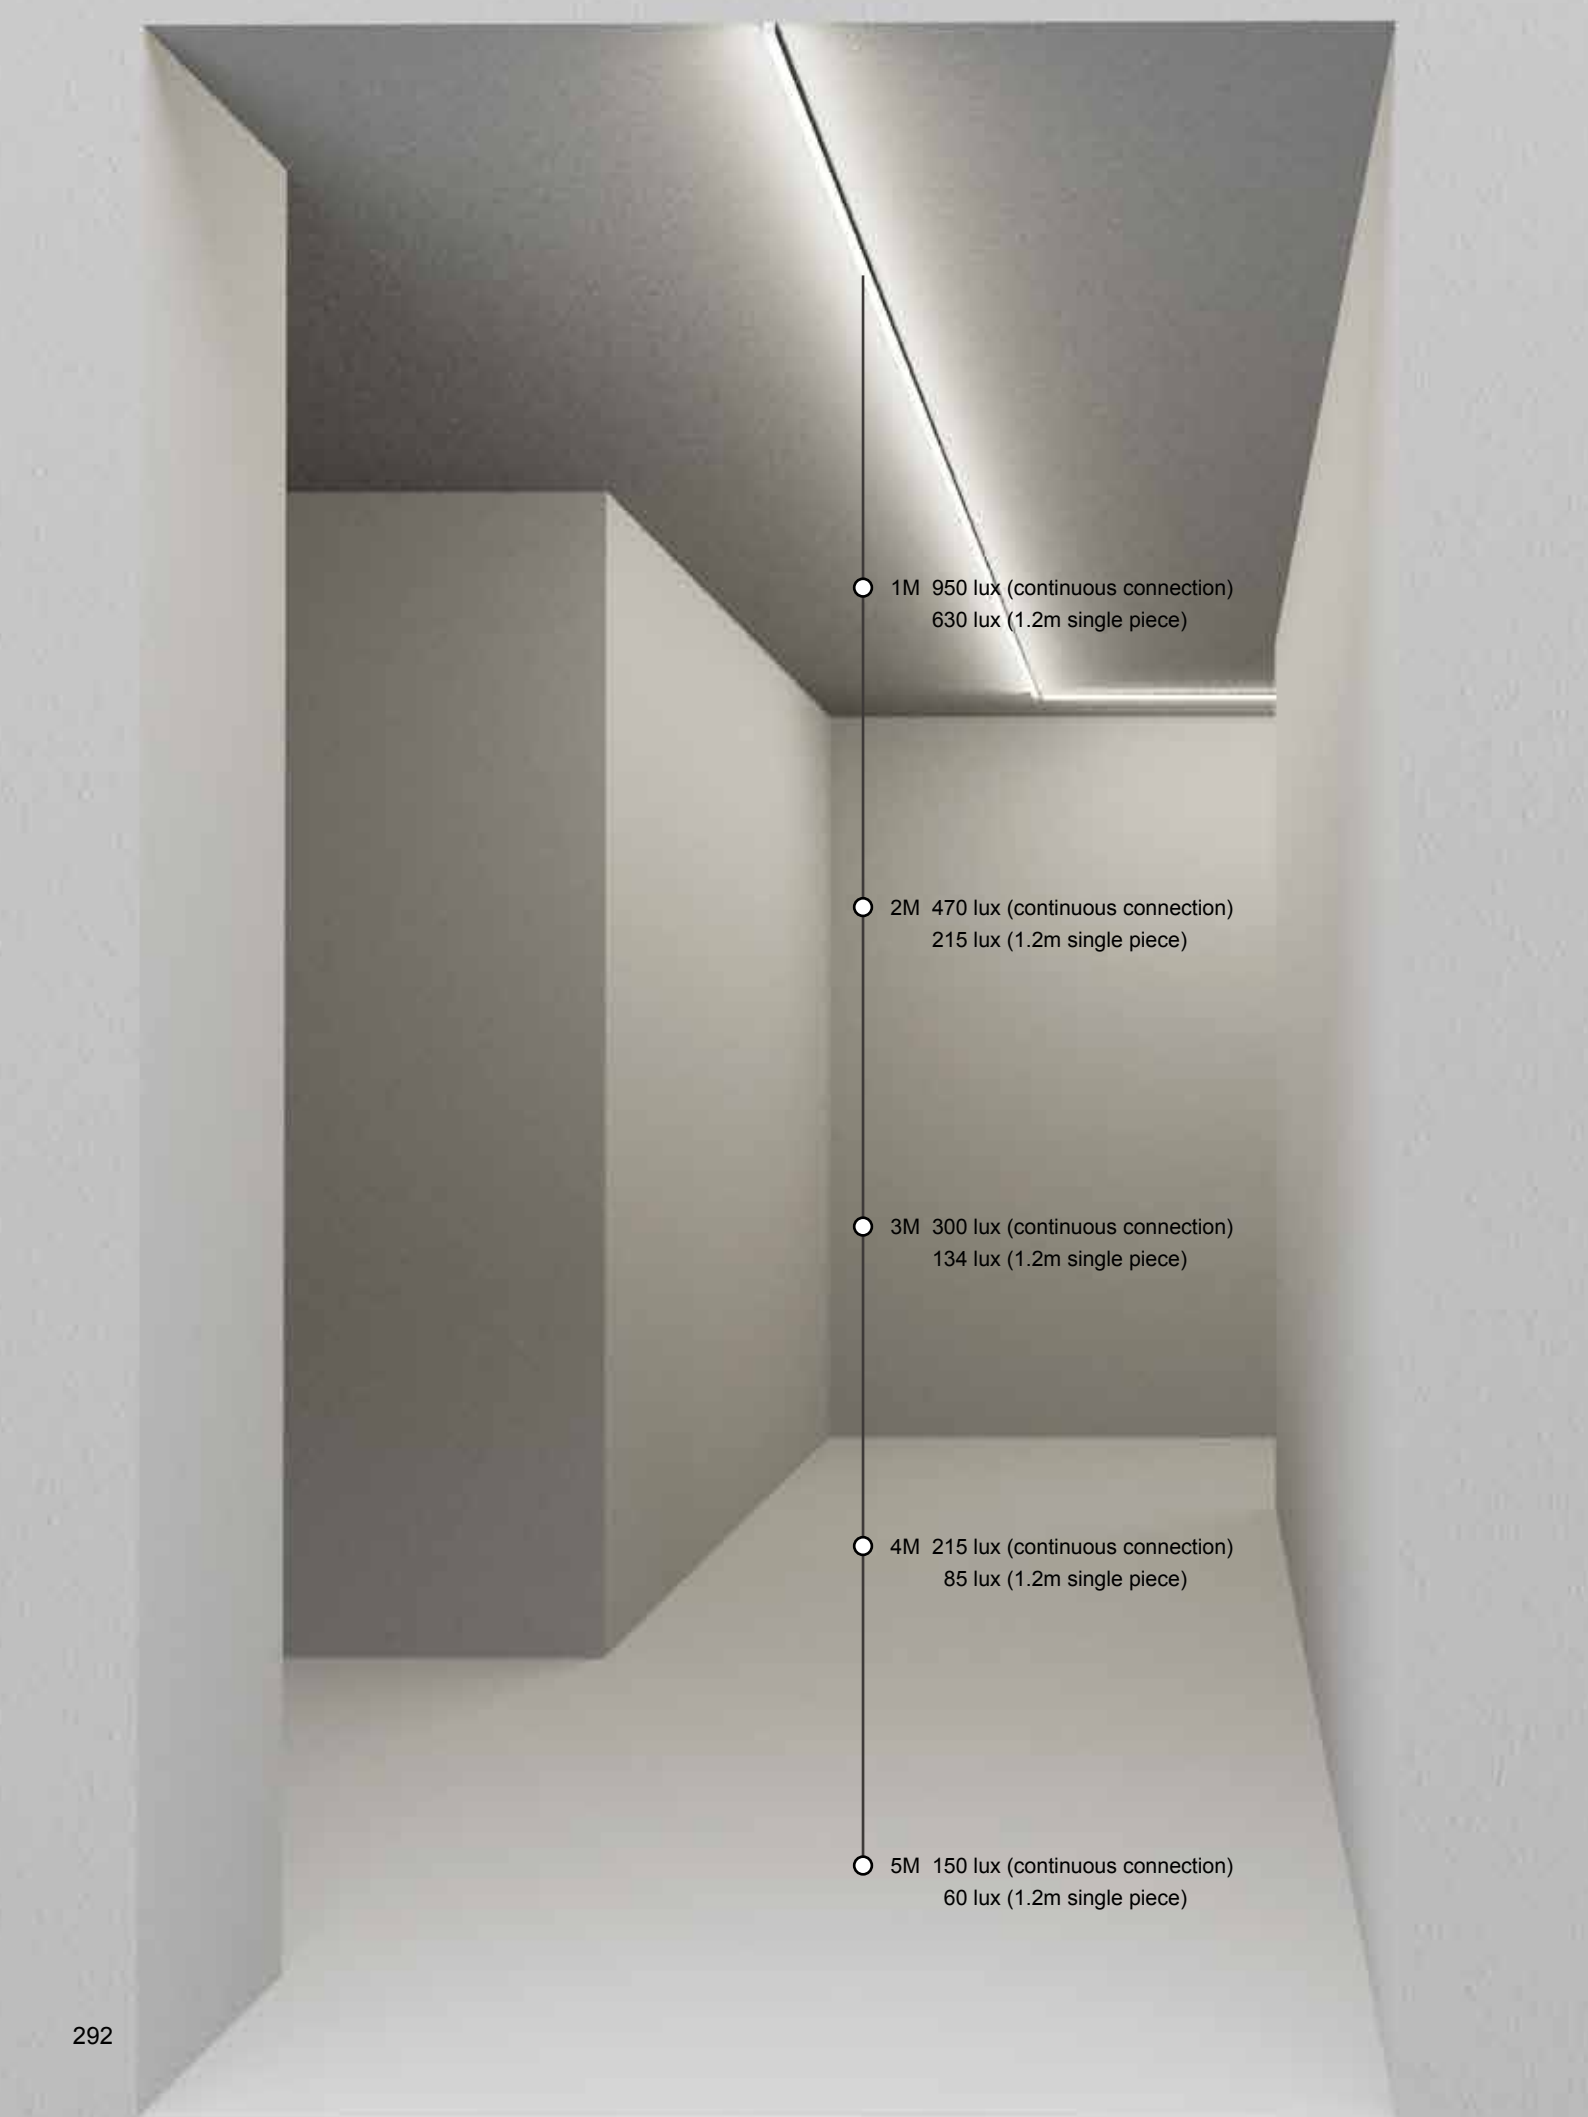

1M 950 lux (continuous connection)  
630 lux (1.2m single piece)


2M 470 lux (continuous connection)  
215 lux (1.2m single piece)

3M 300 lux (continuous connection)  
134 lux (1.2m single piece)

4M 215 lux (continuous connection)  
85 lux (1.2m single piece)

5M 150 lux (continuous connection)  
60 lux (1.2m single piece)

# APOLLO-R-DIMMER-III

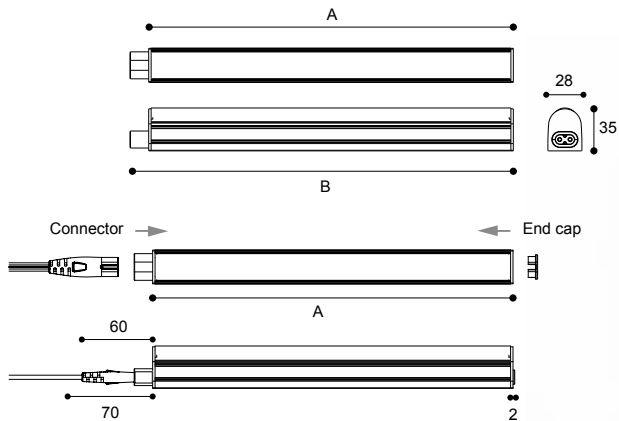

Wattage	A(mm)	B(mm)
7W	300	315
14W	600	615
21W	900	915
28W	1200	1215

## Dimmable

brightness  
1% 100%

### Product features

Smooth and soft dimming: Using RISE dimming technology to dim without flicker and noise.

Dimming with branded dimmer in the market to adjust the intensity of light, dim low during daytime or sleeping.


Dimming range from 1%~100% for various needs.

Suitable for households, shops and indirect lighting.



Colours   
Anodized alum.

Article Number	LED Consumption	Voltage	System Lumen	LED Type	LED q'ty	CCT/CRI
1510.015	7W	230V AC	500 (lm)	SMD	39	30/80+
1510.015	7W	230V AC	550 (lm)	SMD	39	40/80+
1510.015A	14W	230V AC	1050 (lm)	SMD	65	30/80+
1510.015A	14W	230V AC	1155 (lm)	SMD	65	40/80+
1510.015B	21W	230V AC	1600 (lm)	SMD	104	30/80+
1510.015B	21W	230V AC	1760 (lm)	SMD	104	40/80+
1510.015C	28W	230V AC	2300 (lm)	SMD	143	30/80+
1510.015C	28W	230V AC	2530 (lm)	SMD	143	40/80+



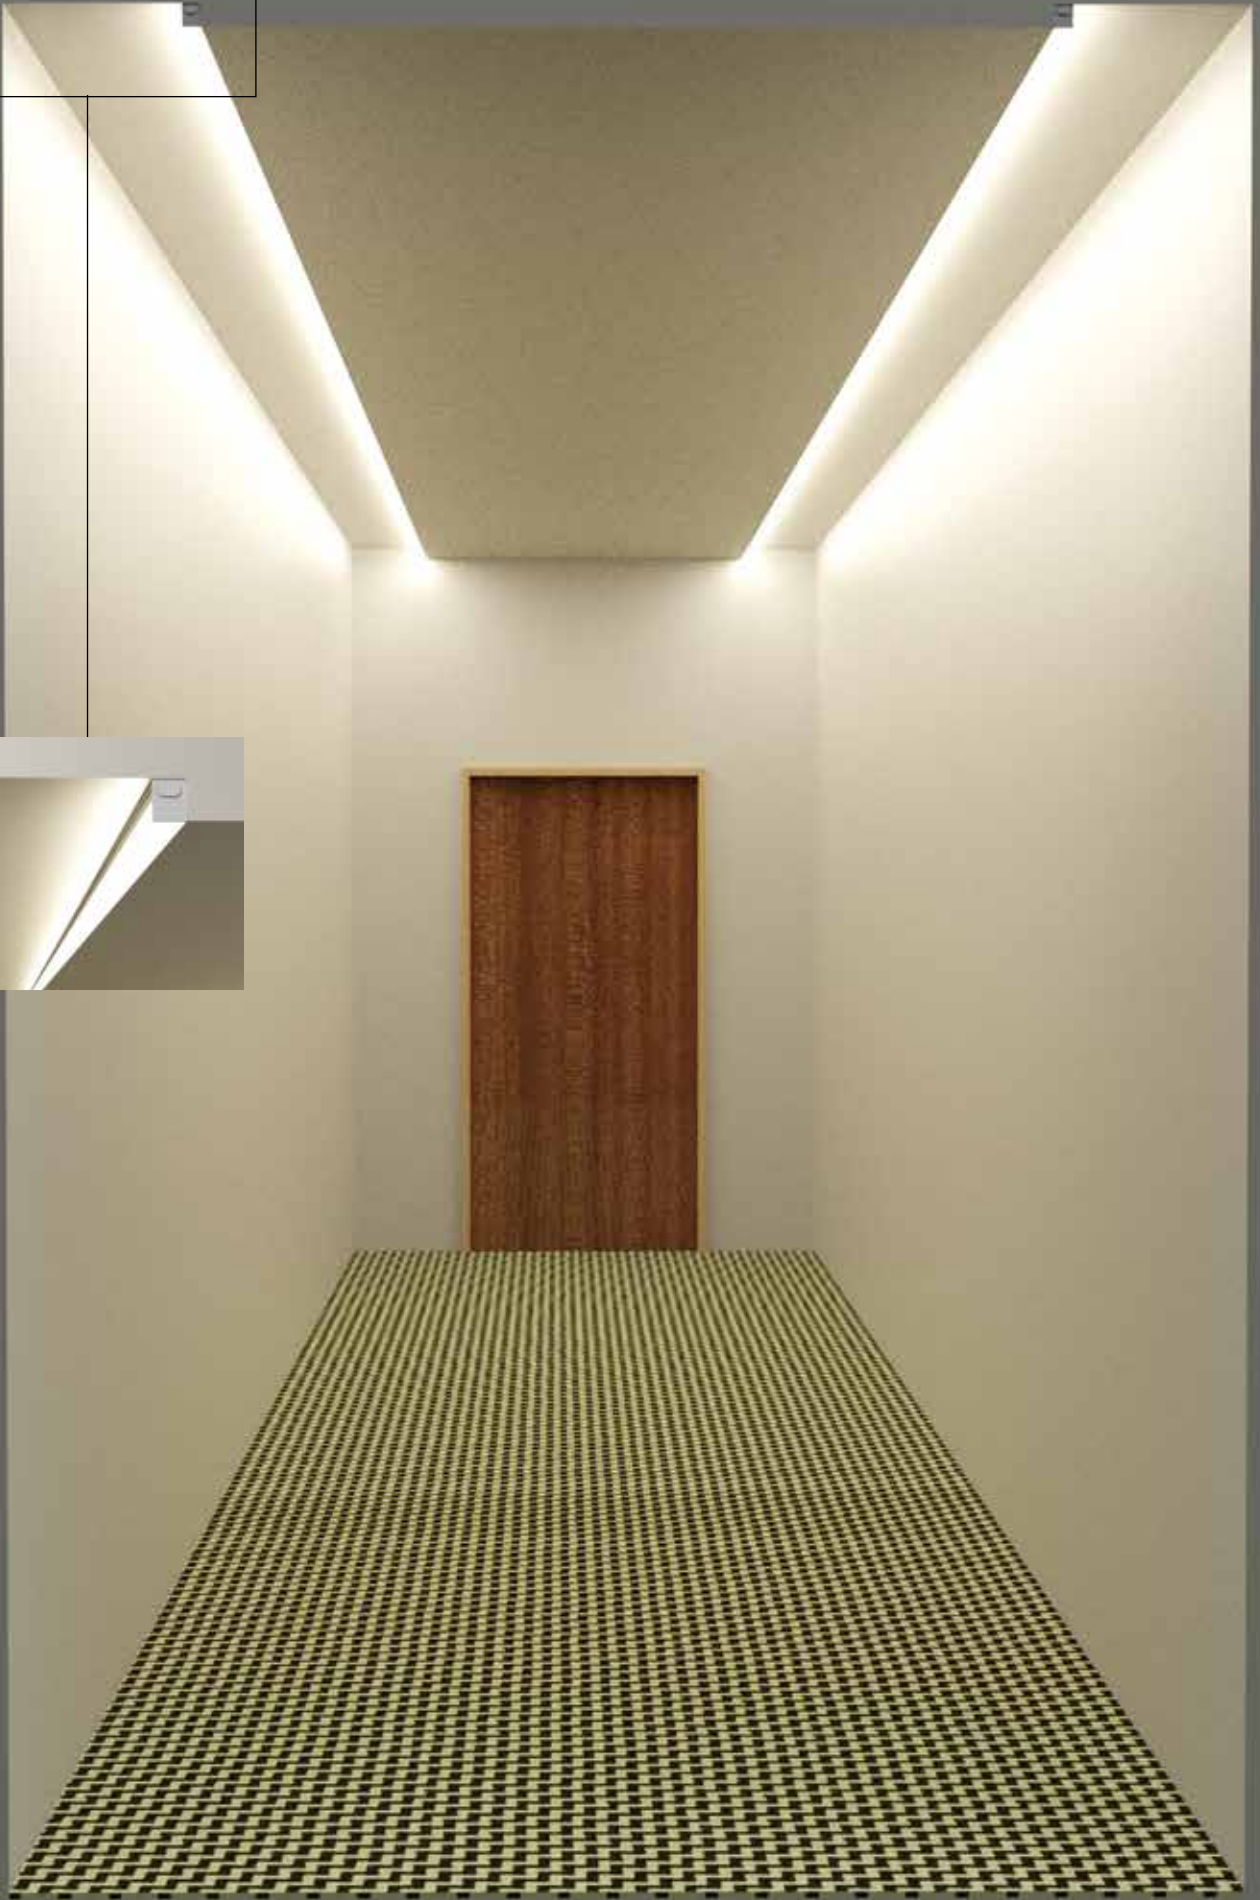

# APOLLO-S-DIMMER-III

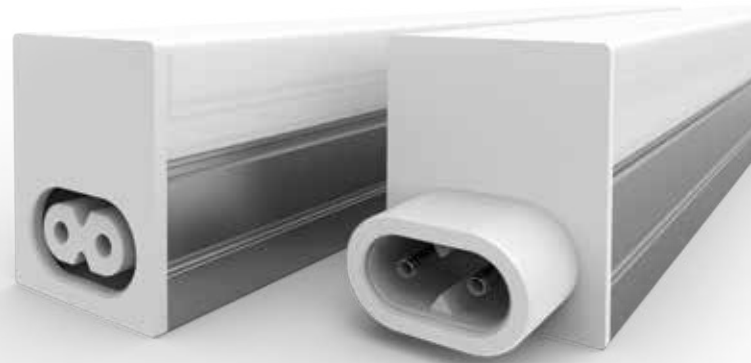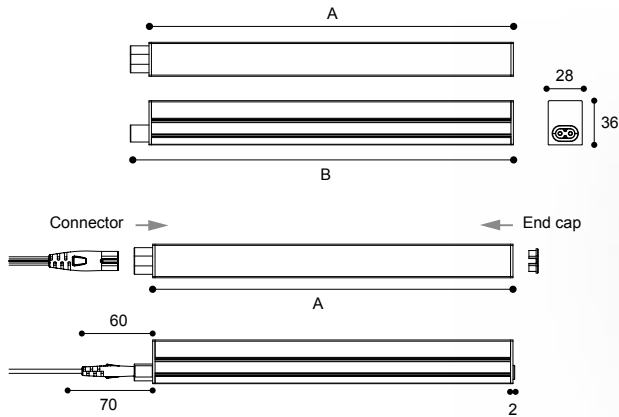

Wattage	A(mm)	B(mm)
7W	300	315
14W	600	615
21W	900	915
28W	1200	1215

## Dimmable

brightness  
1% 100%

### Product features

Smooth and soft dimming: Using RISE dimming technology to dim without flicker and noise.  
Dimming with branded dimmer in the market to adjust the intensity of light, dim low during daytime or sleeping.  
Dimming range from 1%~100% for various needs.  
Suitable for households, shops and indirect lighting.

Colours  Anodized alum.

Article Number	LED Consumption	Voltage	System Lumen	LED Type	LED q'ty	CCT/CRI
1510.016	7W	230V AC	450 (lm)	SMD	39	30/80+
1510.016	7W	230V AC	495 (lm)	SMD	39	40/80+
1510.016A	14W	230V AC	945 (lm)	SMD	65	30/80+
1510.016A	14W	230V AC	1040 (lm)	SMD	65	40/80+
1510.016B	21W	230V AC	1440 (lm)	SMD	104	30/80+
1510.016B	21W	230V AC	1580 (lm)	SMD	104	40/80+
1510.016C	28W	230V AC	2070 (lm)	SMD	143	30/80+
1510.016C	28W	230V AC	2270 (lm)	SMD	143	40/80+

