
## **SLIMDUET**



# **Product specification**

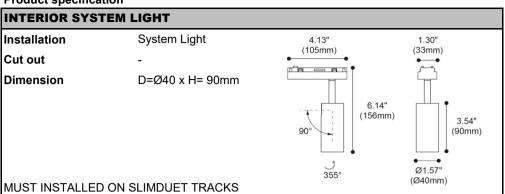

Technical description		
Article number	1617.407-V	
LED Consumption	6.4W	
Current	-	
сст	3000K	
Lumen *1	626lm	
Øsystem <sup>*3</sup>		
Voltage	24Vdc	
Reflector	15°/25°	
CRI	90+	
Driver	-	

Technical character		
Insulation	CLASS II	
Protection	IP 20	
Tilt	0~90°	
Rotate	0~355°	
Operating temperature	-20~40 °C	
Average Failure Time	L70(10k) >60000 (h)	

Materials		
Luminaire	extruded aluminum	
Reflector	plastic-PC	
Heat sink	extruded aluminum	
Color available	white / black	
Color available	white / black / copper	

### **Package**


mm 0 kg inner box mm 0 kg / 0 in 1 outer box

### **Accessories**


None

# Remarks





**Photometric** 



- \*1. LUMEN: for LED chip test result based on Tc=85°C.
  - This is the ideal (Maximum) lumen. This lumen information is from the LED supplier
- \*3. LUMEN(Øsystem) (Total FLUX): this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.