
BRISE

GAGA-SF

Product specification



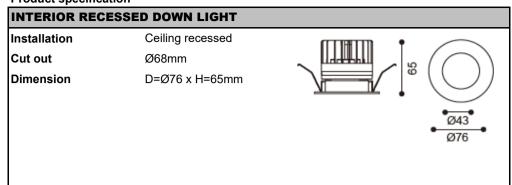

| Technical description | | |
|-----------------------|-------------|--|
| Article number | 1618.116 | |
| LED Consumption | 9W | |
| Current | 250mA | |
| сст | 3000K | |
| Lumen *1 | 856lm | |
| Øsystem ^{*3} | - | |
| Voltage | 35V | |
| Reflector | 10°/20°/30° | |
| CRI | 90+ | |
| Driver | Remoted, | |

Photometric

| Technical character | | |
|-----------------------|---------------------|--|
| Insulation | CLASS III | |
| Protection | IP 44 | |
| Tilt | - | |
| Rotate | - | |
| Operating temperature | -20~40 °C | |
| Average Failure Time | L70(10k) >50000 (h) | |

| Materials | | |
|-------------------------|----------------------|--|
| Luminaire | aluminum die cast | |
| Lummaire | | |
| Reflector | anodized aluminum | |
| Heat sink | forged aluminum | |
| Color available | white / black | |
| Color available(Baffle) | white / black / gold | |

Package

inner box mm 1 kg

outer box mm 0 kg / 0 in 1

Accessories

None

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX): this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.