
VRISE

DIPPER



Product specification

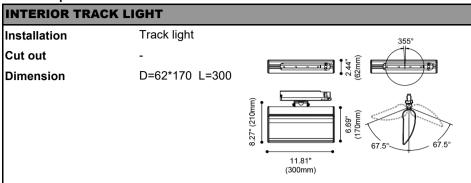

Technical description	
Article number	1619.101B
LED Consumption	30W
Current	700mA
Lumen *1	1850+ lm
Øsystem ^{*3}	-
Voltage	220-240V AC
Reflector	Wallwash
сст	3000K
CRI	90+
Driver	Built in, I/P: 220-240V 50/60HZ
	O/P:30w Max

Technical character		
Insulation	CLASS I	
Protection	IP 20	
Tilt	135°	
Rotate	355°	
Operating temperature	-20~40°C	
Average Failure Time	L70(6k) >36000 (h)	

Materials		
Luminaire	extruded aluminum	
Reflector	aluminum	
Heat sink	extruded aluminum	
Gear box	plastic	
Color available	white / black	

Package


 inner box
 mm 1 kg

 outer box
 mm 0 kg / 0 in 1

Accessories


None

Light distribution



Remarks





- *1. LUMEN : for LED chip test result based on Tc=85°C.
 - This is the ideal (Maximum) lumen. This lumen information is from the LED supplier
- *3. LUMEN(Øsystem) (Total FLUX): this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.