


## SLIMDUET-K



## Product specification

## INTERIOR SYSTEM LIGHT

Installation	Track light
Cut out	-
Dimension	61x33mm L:143/276/405mm

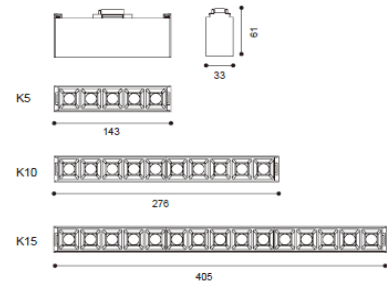

MUST INSTALLED ON SLIMDUET TRACKS

## Technical description

Article number	1817.406A-V	1817.406B-V	1817.406C-V
LED Consumption	11W	22W	33W
Current	-		
CCT	3000K	3000K	3000K
Lumen <sup>*1</sup>	200lm x5	200lm x10	200lm x15
Øsystem <sup>*3</sup>	-	-	-
Voltage	24vdc		
Reflector	15°/30°/40°		
CRI	90+		
Driver	-		

## Technical character

Insulation	CLASS I
Protection	IP 20
Tilt	-
Rotate	-
Operating temperature	-20~40 °C
Average Failure Time	L70(6k) >36000 (h)

## Materials

Luminaire	aluminum extruded
Reflector	Lens
Heat sink	aluminum extruded
Color available(body)	white / black
Color available(Baffle)	white / black / Piano black

## Package


inner box	mm 1 kg
outer box	mm 0 kg / 0 in 1

## Photometric

## Accessories

None

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

\*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture,  
this is the real lumen with the loss because of different design of reflectors and fixtures.