
BRISE

TEYVAT



Product specification

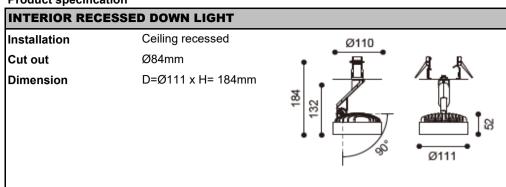

Technical description				
Article number	1818.137			
LED Consumption	24.8W			
Current	700mA			
ССТ	2700K	3000K	4000K	
Lumen ^{*1}	2763lm	2873lm	2918lm	
Øsystem ^{*3}	-	-	-	
Voltage	35.5V			
Reflector	15°/20°/35°	15°/20°/35°		
CRI	90+	90+		
Driver	Remoted, I/P:			
	O/P: 700m/	O/P: 700mA		

Technical character		
Insulation	CLASS II	
Protection	IP 20	
Tilt	0~90°	
Rotate	0~355°	
Operating temperature	-25~45 °C	
Average Failure Time	L70(10k) >60000 (h)	

Materials		
Luminaire	extruded aluminum	
Luillilaire		
Reflector	plastic-PC	
Heat sink	aluminum die cast	
Gear box	plastic	
Color available	white / black / double	

Package

 inner box
 mm 1 kg

 outer box
 mm 0 kg / 0 in 1

striped glass , honeycomb louver , Snoot

Accessories

Remarks



- *1. LUMEN : for LED chip test result based on Tc=85°C.
 - This is the ideal (Maximum) lumen. This lumen information is from the LED supplier
- *3. LUMEN(Øsystem) (Total FLUX): this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.



