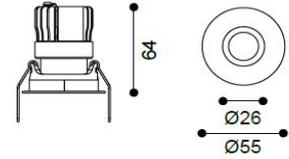


## MINI-GAGA

## Product specification

**INTERIOR RECESSED DOWN LIGHT**

<b>Installation</b>	Ceiling recessed
<b>Cut out</b>	Ø47mm
<b>Dimension</b>	D=Ø55 x H=64mm

**Technical description**

<b>Article number</b>	1818.142	
<b>LED Consumption</b>	6.3W	
<b>Current</b>	350mA	
<b>CCT</b>	2700K	3000K
<b>Lumen <sup>*1</sup></b>	504 lm	542 lm
<b>Øsystem <sup>*3</sup></b>	-	
<b>Voltage</b>	18.2V	
<b>Reflector</b>	50°	
<b>CRI</b>	90+	
<b>Driver</b>	Remoted, Output 350mA	

**Technical character**


<b>Insulation</b>	CLASS I
<b>Protection</b>	IP 65
<b>Tilt</b>	-
<b>Rotate</b>	-
<b>Operating temperature</b>	-20~40 °C
<b>Average Failure Time</b>	L70(10k)50000(h)

**Materials**

<b>Luminaire</b>	aluminum die cast tempered glass
<b>Reflector</b>	plastic-PC
<b>Heat sink</b>	forged aluminum
<b>Color available</b>	white / black

**Package**

<b>inner box</b>	mm 1 kg
<b>outer box</b>	mm 0 kg / 0 in 1

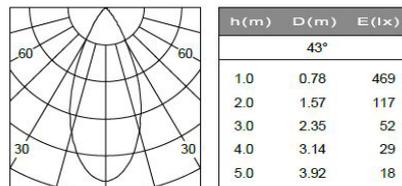**Photometric****Accessories**

None

**Remarks**

\*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

\*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture,  
this is the real lumen with the loss because of different design of reflectors and fixtures.