
ARISE

TEYVAT



Product specification

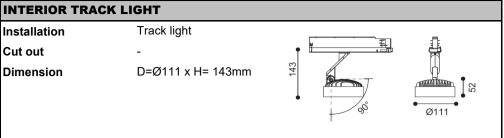

Technical description				
Article number	1819.215			
LED Consumption	24.8W			
Current	700mA			
сст	2700K	3000K	4000K	
Lumen ^{*1}	2763lm	2873lm	2918lm	
Øsystem ^{*3}	-	-	-	
Voltage	35.5V			
Reflector	15°/20°/35°			
CRI	90+			
Driver	Remoted, I/P :			
	O/P : 700mA			

Technical character		Materials	Materials		
Insulation	CLASS II	Lumineire	extruded aluminum		
Protection	IP 20	Luminaire			
Tilt	0~90°	Reflector	plastic-PC		
Rotate	0~355°	Heat sink	aluminum die cast		
Operating temperature	-25~45 °C	Gear box	plastic		
Average Failure Time	L70(6k) >36000 (h)	Color available	white / black / double		

Package

inner box outer box

r

mm 1 kg mm 0 kg / 0 in 1

Accessories

striped glass , honeycomb louver , Snoot

Remarks



*1. LUMEN : for LED chip test result based on Tc=85 $^{\circ}$ C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

Photometric

