





KANO-III-5-TF



## Product specification

## INTERIOR COMBO LIGHTS

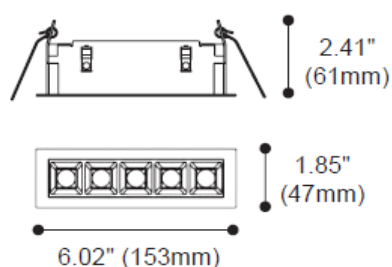

## Technical Specification

Article number	1914.412-5
LED Consumption	11W (2.2W X5pcs)
Fixture Consumption	-
Current / Voltage	700mA / -
CRI	90+
CCT	3000K
LED Lumen <sup>*1</sup>	200lm X5
Delivered Lumen	743lm
Beam Angle available	15°/30°/40° (Reflector)

## Driver Technical Specification (Remoted)


Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

## Technical character

Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Trim	SPCC
Insulation	CLASS II	Optics	PC
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate	-	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	black / white / piano black

## Accessories

## Photometric

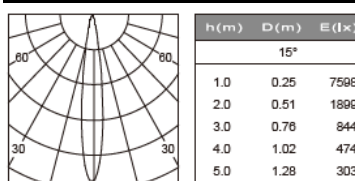

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.