





AMAFI-85V

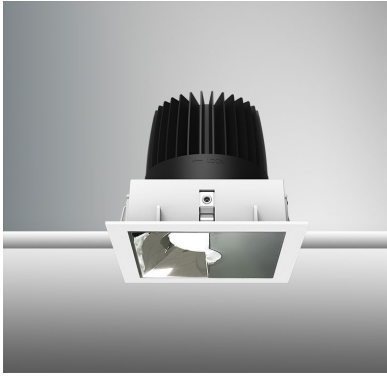

Product specification

INTERIOR RECESSED DOWN LIGHT

Installation	Ceiling recessed
Cut out	89 x 89
Dimension	D= 89 x H=118

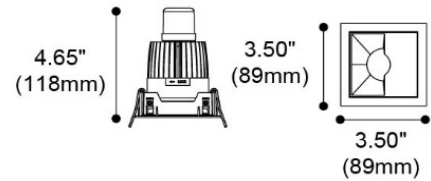

Technical description

Article number	1918.124
LED Consumption	13W
Current	350mA
CCT	3000K
Lumen ^{*1}	1387lm
Øsystem ^{*3}	-
Voltage	-
Reflector	Wallwash
	-
CRI	90+
Driver	Remoted, I/P : 90-264V 50/60HZ O/P : 12-48V 350mA 16w Max

Technical character

Insulation	CLASS II
Protection	IP44
Tilt	0~30°
Rotate	-
Operating temperature	-20~40°C
Average Failure Time	L70(10k) >60000 (h)


Materials

Luminaire	aluminum die cast
Baffle	ABS
Bezel	ADC12
Reflector	plastic-PC
Heat sink	forged aluminum
Bezel available color	white/black
Baffle available color	chrome/white/black/matt black/mirror black/piano black/champagne

Package

inner box	-	mm	1 kg
outer box	-	mm	0 kg / 0 in 1

Accessories



Remarks



*1. LUMEN (Typical Pulsed Flux) : for LED chip test result based on Tj=25°C", the ambient temperature at 25°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier

*3. LUMEN(Øsystem) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture,
this is the real lumen with the loss because of different design of reflectors and fixtures.

Photometric