





KANO-II-10-SF

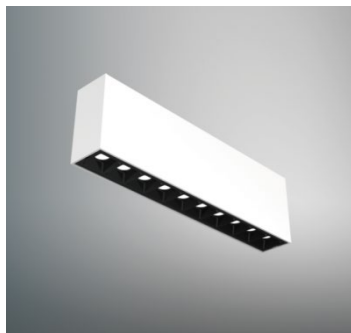

Product specification

INTERIOR SURFACE MOUNTED CEILING LIGHTS

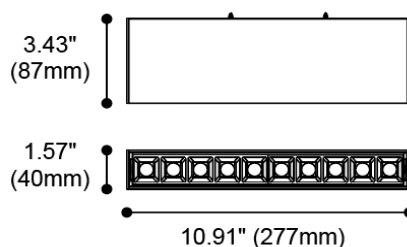

Technical Specification

Article number	2013.169-10
LED Consumption	2.2W x10
Fixture Consumption	23W
Current / Voltage	700mA / -
CRI	90+
CCT	3000K
LED Lumen ^{*1}	200lm x10
Delivered Lumen	1459lm
Beam Angle available	15°/30°/40° (Reflector)

Driver Technical Specification (Built-in)


Driver Brand	OSRAM	Driver Model	OT FIT 30/220-240/700 CS S MINI
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	700mA / 30-42Vdc
Dimming / Flicker	Non / Free	Certification	ENEC/RCM/CE/CCC
Power Factor	>0.9	Warranty	5years

Technical character

Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Reflector	PC
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate	non / non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	piano black

Accessories

Photometric



h(m)	D(m)	E(lx)
15°		
1.0	0.29	11173
2.0	0.59	2793
3.0	0.88	1241
4.0	1.18	698
5.0	1.47	446

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.