




KANO-II-P9-SF



Product specification

INTERIOR SURFACE MOUNTED CEILING LIGHTS

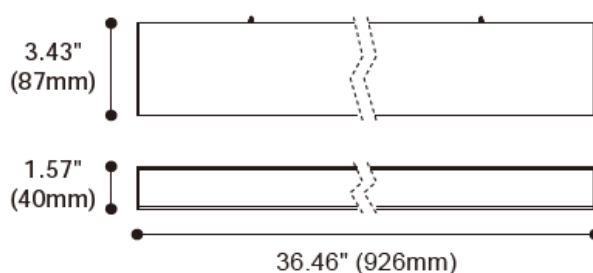

Technical Specification

Article number	2013.170B		
LED Consumption	25W		
Fixture Consumption	-		
Current / Voltage	700mA / -		
CRI	80+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	-	-	-
Delivered Lumen	-	1500lm	-
Beam Angle available	115°		

Driver Technical Specification (Built-in)

Driver Brand	OSRAM	Driver Model	OT FIT 30/220-240/700 CS S MINI
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	700mA / 30-42Vdc
Dimming / Flicker	Non / Free	Certification	ENEC/CE
Power Factor	>0.9	Warranty	5years

Technical character

Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031		PC
Insulation	CLASS III	Fixture color available	white / black
Protection	IP20		
Tilt / Rotate	None / None		
Operating temperature	0~35°C		
Average Failure Time			

Accessories

Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.