




GRAEAE-II-70-RSP-R2

## Product specification

## INTERIOR TRACK LIGHTS

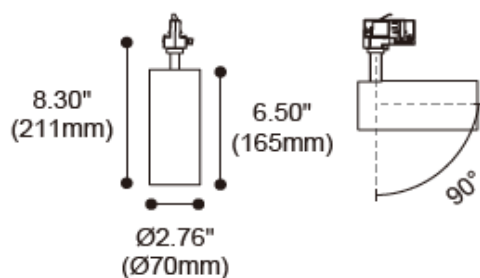

## Technical Specification

|                         |                        |        |        |
|-------------------------|------------------------|--------|--------|
| Article number          | 2019.216               |        |        |
| LED Consumption         | 26W                    |        |        |
| Fixture Consumption     | -                      |        |        |
| Current / Voltage       | 700mA / 36Vdc          |        |        |
| CRI                     | 90+                    |        |        |
| CCT                     | 2700K                  | 3000K  | 4000K  |
| LED Lumen <sup>*1</sup> | 2753lm                 | 2918lm | 3186lm |
| Delivered Lumen         | -                      | -      | -      |
| Beam Angle available    | 14°/22°/34°(Reflector) |        |        |


## Driver Technical Specification (Built-in)

|                                 |                      |                          |                  |
|---------------------------------|----------------------|--------------------------|------------------|
| Driver Brand                    | HEP                  | Driver Model             | LNC30W700LRP     |
| Input voltage / Frequency range | 220-240Vac / 50/60Hz | Output Current / Voltage | 700mA / 25-42Vdc |
| Dimming / Flicker               | Non / Free           | Certification            | ENEC/SAA/CCC/CE  |
| Power Factor                    | >0.9                 | Warranty                 | 5years           |


## Technical character

|                       |                  |                         |                        |
|-----------------------|------------------|-------------------------|------------------------|
| Products Standard     | IEC 60598-1      | Luminaire               | Forged aluminum        |
|                       | IEC 62031        | Trim                    | -                      |
| Insulation            | CLASS II         | Reflector               | PC                     |
| Protection            | IP20             | Heat sink               | Forged aluminum        |
| Tilt / Rotate         | 0~90° / 0~355°   | Fixture color available | white / black          |
| Operating temperature | 0~35°C           | Baffle                  | PC                     |
| Average Failure Time  | L80(10k)55400(h) | Baffle Color available  | white / black / copper |

## Accessories

ACS-G-7  
striped glassACHO-10  
Honeycomb louverACWG-8  
Woven glassACSN-10  
Long snoot

## Photometric



| h(m) | D(m) | E(1x) |
|------|------|-------|
| 22°  |      |       |
| 1.0  | 0.40 | 8785  |
| 2.0  | 0.81 | 2196  |
| 3.0  | 1.21 | 976   |
| 4.0  | 1.61 | 549   |
| 5.0  | 2.01 | 351   |

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.