




GRAEAE-II-64-RSP-R3

Product specification



INTERIOR TRACK LIGHTS

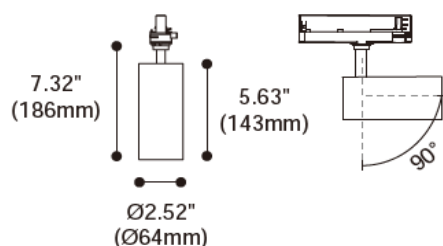

Technical Specification

Article number	2019.218		
LED Consumption	26W		
Fixture Consumption	-		
Current / Voltage	700mA / 36Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	-	2829lm	-
Delivered Lumen	-	-	-
Beam Angle available	15°/23°/38°/45°/60°(Reflector)		

Driver Technical Specification (Built-in)

Driver Brand	POWERGEAR	Driver Model	PRO-UA430-W
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	700mA / 25-42Vdc
Dimming / Flicker	Non / Free	Certification	ENEC/CE/CQC
Power Factor	>0.9	Warranty	5 years

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Reflector	PC
Protection	IP20	Heat sink	Extruded aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L80(6k)>33300(h)	Baffle Color available	white / black / copper

Accessories

Photometric

ACSG-8
striped glassACHO-11
Honeycomb louverACWG-9
Woven glassS17-1
Long snoot

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.