




GRAEAE-II-64-RSP-R4

Product specification



INTERIOR TRACK LIGHTS

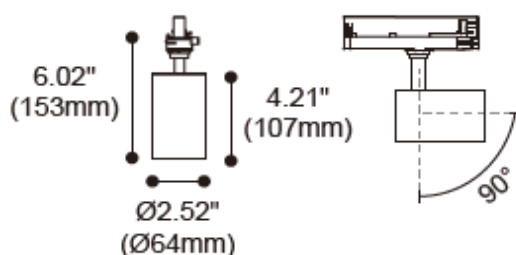

Technical Specification

Article number	2019.233		
LED Consumption	13W		
Fixture Consumption	-		
Current / Voltage	350mA / 35.5Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	1256lm	1332lm	1454lm
Delivered Lumen	-	-	-
Beam Angle available	15°/23°/38°/45°/60°(Reflector)		

Driver Technical Specification (Built-in)

Driver Brand	POWERGEAR	Driver Model	PRO-UA420-W
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	350mA / 25-42Vdc
Dimming / Flicker	Non / Free	Certification	ENEC/CE/CQC
Power Factor	>0.9	Warranty	5 years

Technical character


Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Reflector	PC
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L80(10k)>55400(h)	Baffle Color available	white / black / copper

Materials

Accessories

ACSG-8
striped glassACHO-11
Honeycomb louverACWG-9
Woven glassS17-1
Long snoot

Photometric



h (m)	D (m)	E (lx)
38°		
1.0	0.64	3548
2.0	1.29	886
3.0	1.93	394
4.0	2.58	221
5.0	3.22	141

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.