


SKYRIM SERIES (EU)

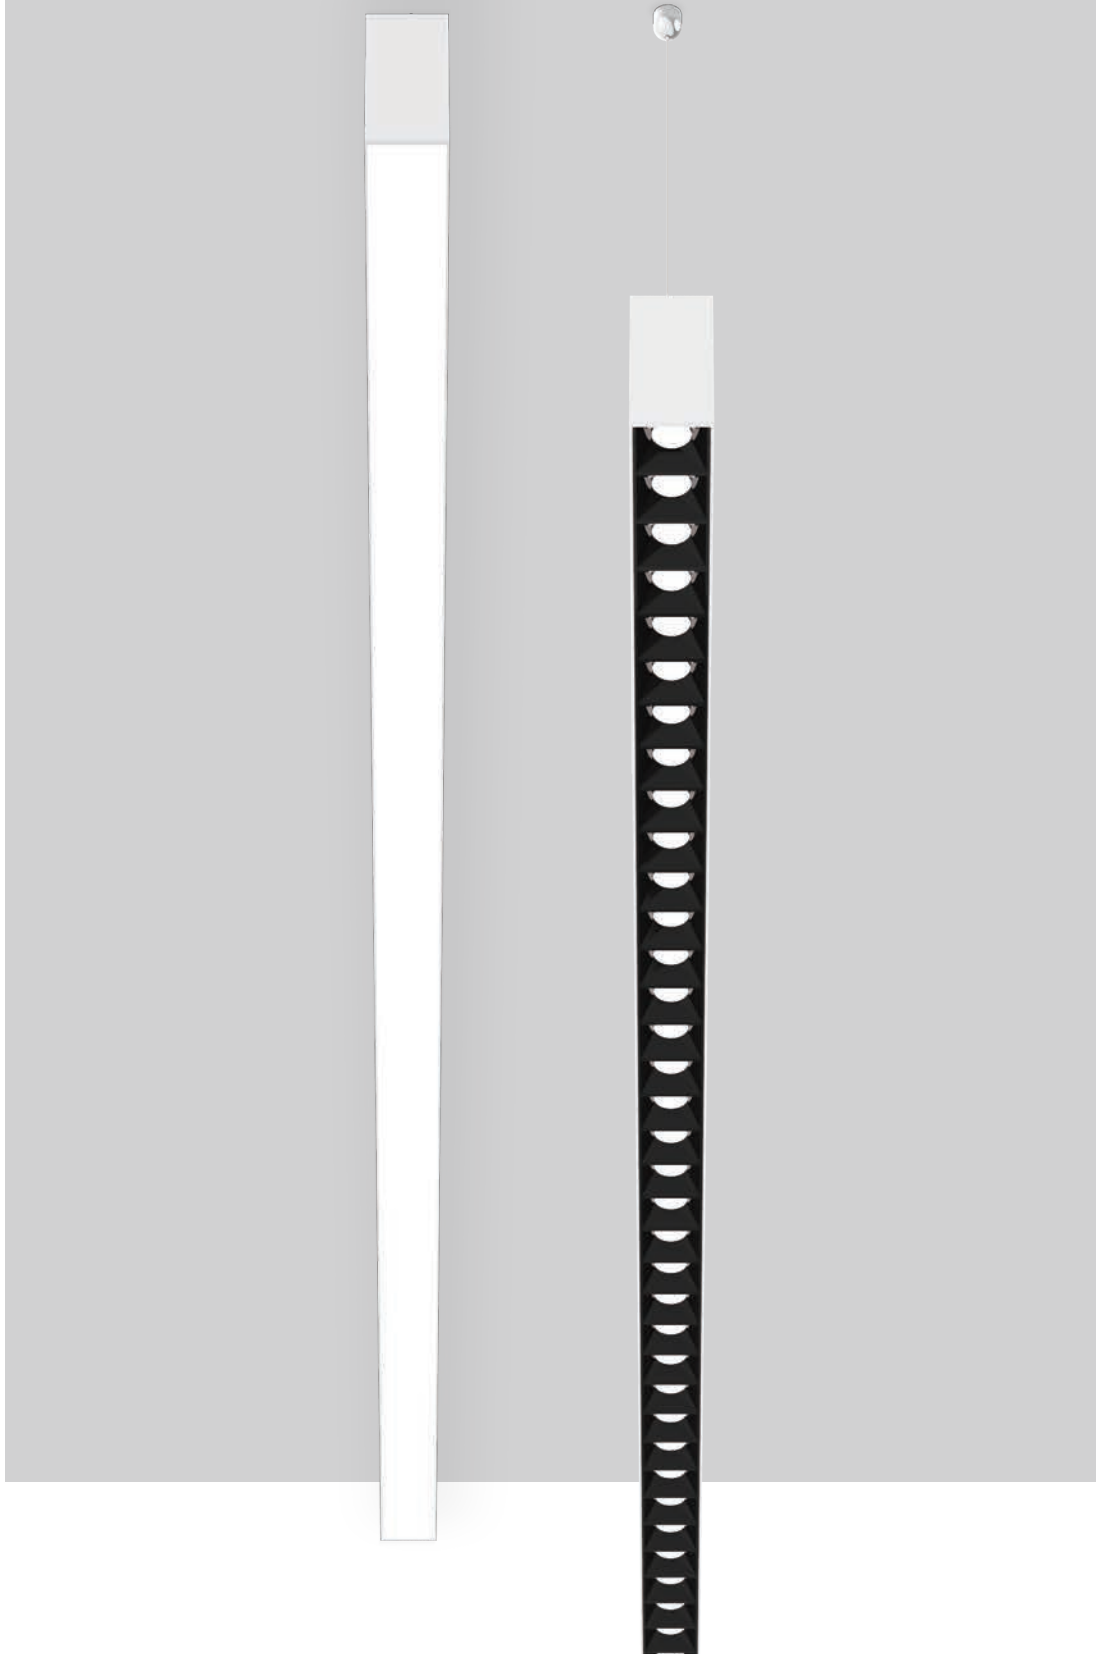

SKYRIM (EU)

SKYRIM is a versatile, elegant and slim office luminaire. Two different mounting options, surface-mounted, and suspended. The series is designed as a lighting solution for upscale offices and commercial interiors.

They ensure uniform illumination and provide pleasing ceiling lighting, creating a friendly working environment.

Shape



Linear

Mountings



Surface
Mounted




Pendant


Light distributions



Downlight

SKYRIM surface mounted / pendant lights
fixed

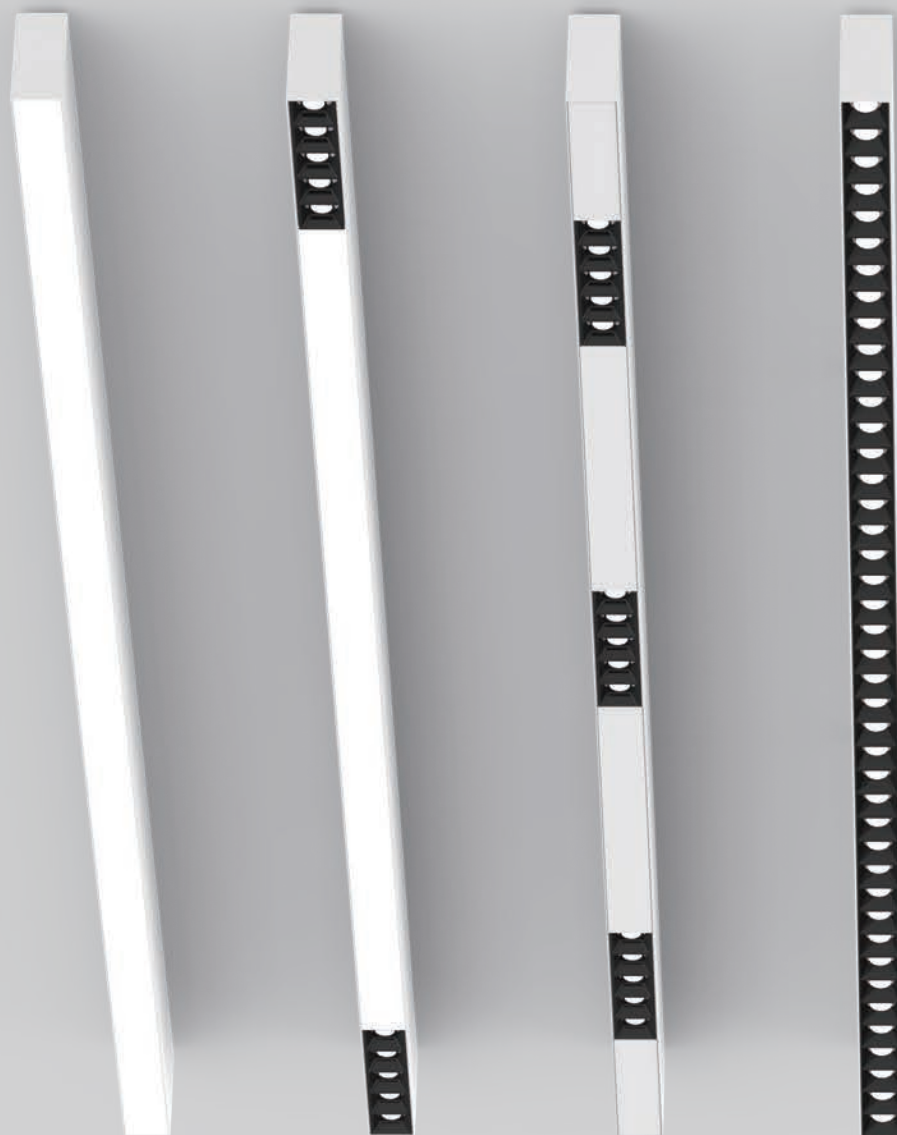


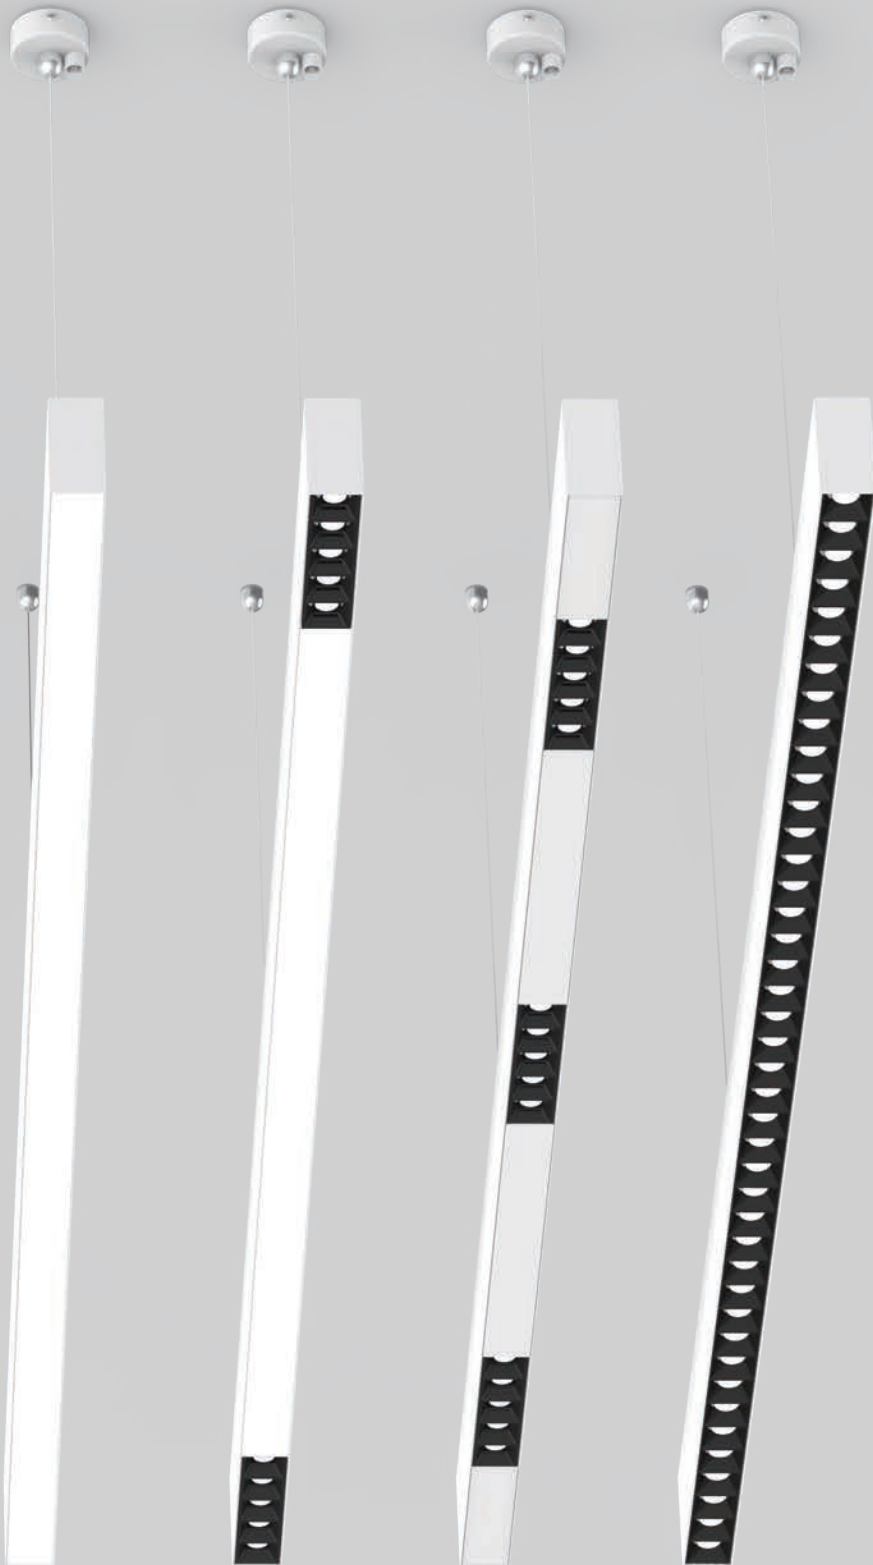

Specification

2700 K, 3000 K, 4000 K,
CRI $\geq$ 90
IP20

Types

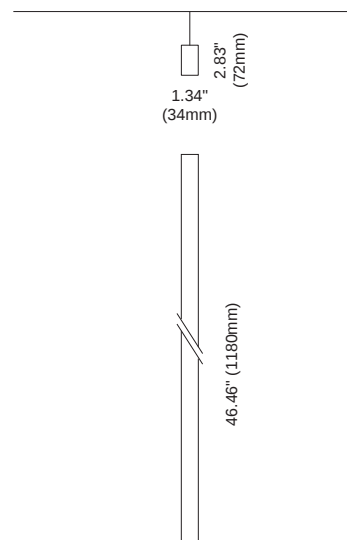


Colours



Baffle :  Black

Custom baffle colour



SKYRIM Surface mounted / Pendant lights
fixed





SKYRIM-PANEL-SF





Article number	2013.140
LED Consumption	24.5W
Current	700 (mA)
Delivered Lumen	1340 (lm)
Beam Angle	120°
CCT	3000K
CRI	80+

Colours  
Black White

**Dimmable**

Driver Built-in

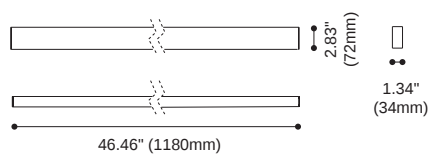

h (m)	D (m)	E (lx)
120°		
1.0	2.94	329
2.0	5.88	82
3.0	8.82	36
4.0	11.76	20
5.0	14.70	13

SKYRIM-10+PANEL-SF




Article number	2013.134
LED Consumption	22W (2.2W X10)
LED Consumption (panel)	18.5W
Current	700 (mA)
Current (panel)	500 (mA)
Lumen	200 (lm) X10
Lumen (panel)	1050 (lm)
Beam Angle	15°/30°/40° (Reflector)
Beam Angle (panel)	120°
CCT	3000K
CRI	90+
CRI(panel)	80+

Colours :  
Black White

**Dimmable**

Driver Built-in

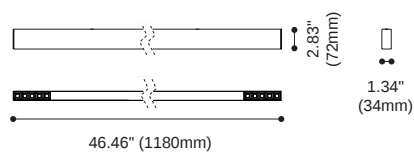

SKYRIM-10-SF




Article number	2013.139
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Lumen	200 (lm) X10
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

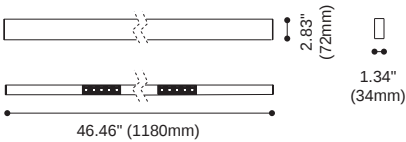

SKYRIM-15-SF




Article number	2013.135
LED Consumption	33W (2.2W X15)
Current	700 (mA)
Lumen	200 (lm) X15
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White



Driver Built-in

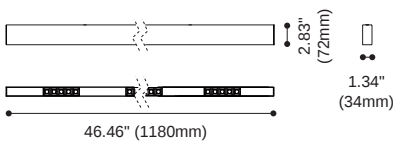

SKYRIM-42-SF





Article number	2013.141
LED Consumption	25W
Current	700 (mA)
System Lumen	2381 (lm)
Beam Angle	45° (Lens)
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

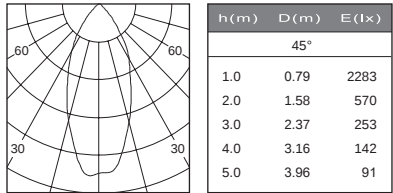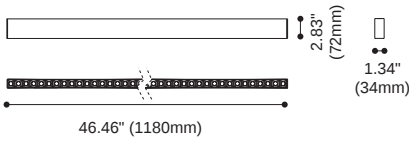

SKYRIM-PANEL-P





Article number	2016.114
LED Consumption	24.5W
Current	700 (mA)
Delivered Lumen	1340 (lm)
Beam Angle	120°
CCT	3000K
CRI	80+

Colours  
Black White



Dimmable

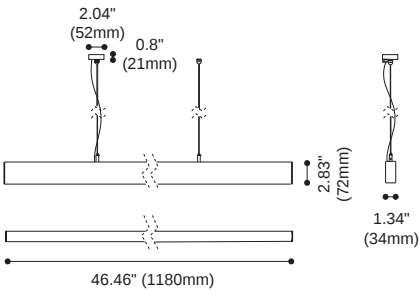

h (m)	D (m)	E (lx)
120°		
1.0	2.94	329
2.0	5.88	82
3.0	8.82	36
4.0	11.76	20
5.0	14.70	13

SKYRIM-10+PANEL-P




Article number	2016.110
LED Consumption	22W (2.2W X10)
LED Consumption(panel)	18.5W
Current	700 (mA)
Current(panel)	500 (mA)
Lumen	200 (lm) X10
Lumen(panel)	1050 (lm)
Beam Angle	15°/30°/40° (Reflector)
Beam Angle(panel)	120°
CCT	3000K
CRI	90+
CRI(panel)	80+

Colours :  
Black White



Dimmable

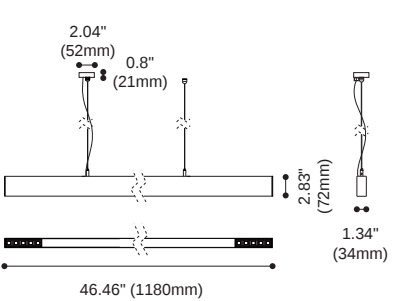

SKYRIM-10-P




Article number	2016.113
LED Consumption	22W (2.2W X10)
Current	700 (mA)
Lumen	200 (lm) X10
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

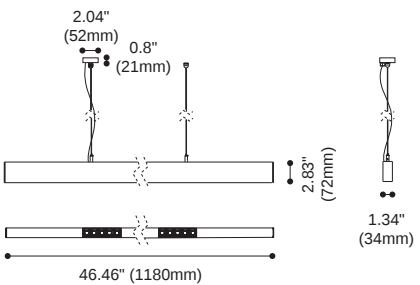

SKYRIM-15-P




Article number	2016.111
LED Consumption	33W (2.2W X15)
Current	700 (mA)
Lumen	200 (lm) X15
Beam Angle	15°/30°/40° (Reflector)
CCT	3000K
CRI	90+


Colours :  
Black White



Driver Built-in

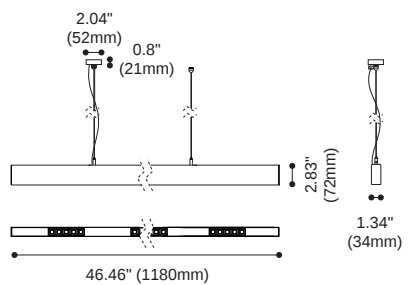

SKYRIM-42-P

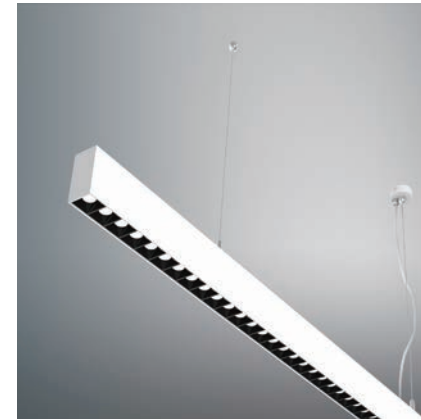

Article number	2016.115
LED Consumption	25W
Current	700 (mA)
System Lumen	2381 (lm)
Beam Angle	45° (Lens)
CCT	3000K
CRI	90+

Colours :  
Black White



Dimmable

