





## AMAFI-85V-3-STA



## Product specification

## INTERIOR RECESSED DOWNLIGHTS

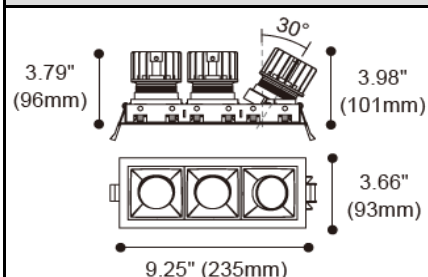

## Technical Specification

Article number	2114.437-3-ACOT-36		
LED Consumption	14W X3		
Fixture Consumption	-		
Current / Voltage	350mA / 38.3Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen <sup>*1</sup>	1139lm X3	1193lm X3	1282lm X3
Delivered Lumen	-	-	-
Beam Angle available	15°/24°/36°/50° (Lens)		

## Driver Technical Specification (Remoted)


Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

## Technical character

Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	None / None	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time		Baffle Color available	white / black / Chrome

## Accessories

## Photometric

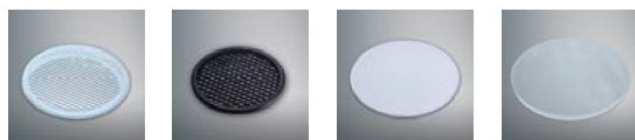SG7-1  
Striped glassH7-1  
Honeycomb louverDS7-1  
Diffusion sheetWG7-1  
Woven glassACOT-82  
MR16 Accessory kitsACOT-83  
GU10 Accessory kitsPJ-0079  
MR16&GU10 Accessory

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.