


Luminaire Photograph

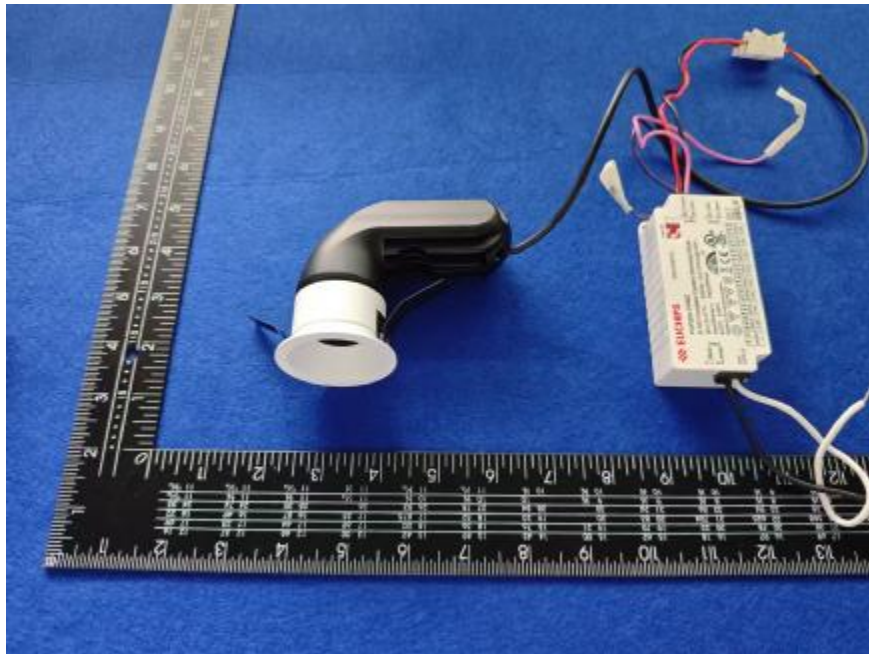

Light Output Ratio:	75.8%	
Luminaire Power:	13.7 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.50	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30G10T0-G-83 Ra:90
LENS: PM-1084A 24R
DRIVER: PUP20A-1WMC 600mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

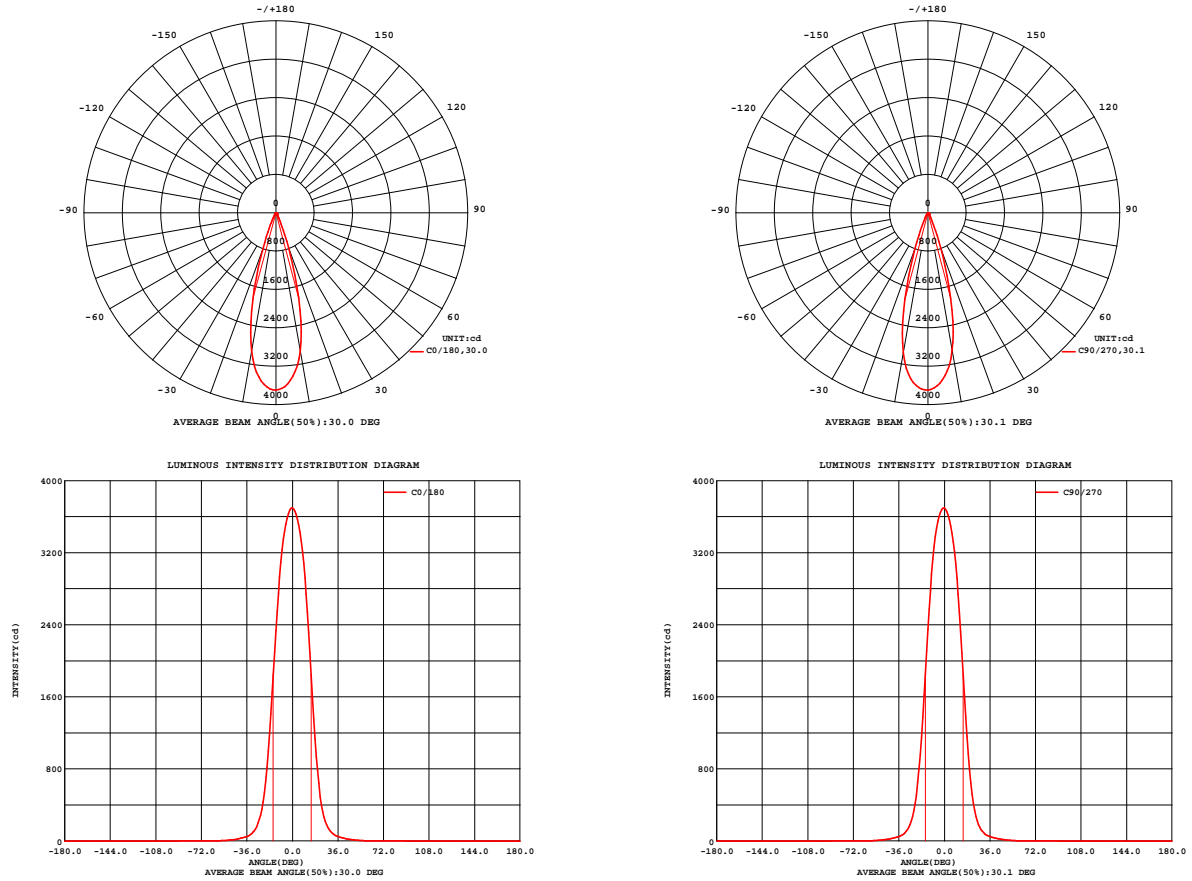


Fig. C0/C180

Fig. C90/C270

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2025-7-03


Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30G10T0-G-83 Ra: 90
LENS: PM-1084A 24R
DRIVER: PUP20A-1WMC 600mA

30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.08V I:0.1150A P:13.699W PF:0.9903 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030416
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 74.29 lm/W			
MODEL	Brideglux	Imax(cd)	3695	S/MH(C0/180)	0.48
NOMINAL POWER(W)	13	LOR(%)	75.8	S/MH(C90/270)	0.47
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1017.8	UP,DN(C0-180)	0.0,37.8
NOMINAL FLUX(lm)	1342.44	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,38.0
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	down(%)	75.8	CIBSE SHR MAX	0.50

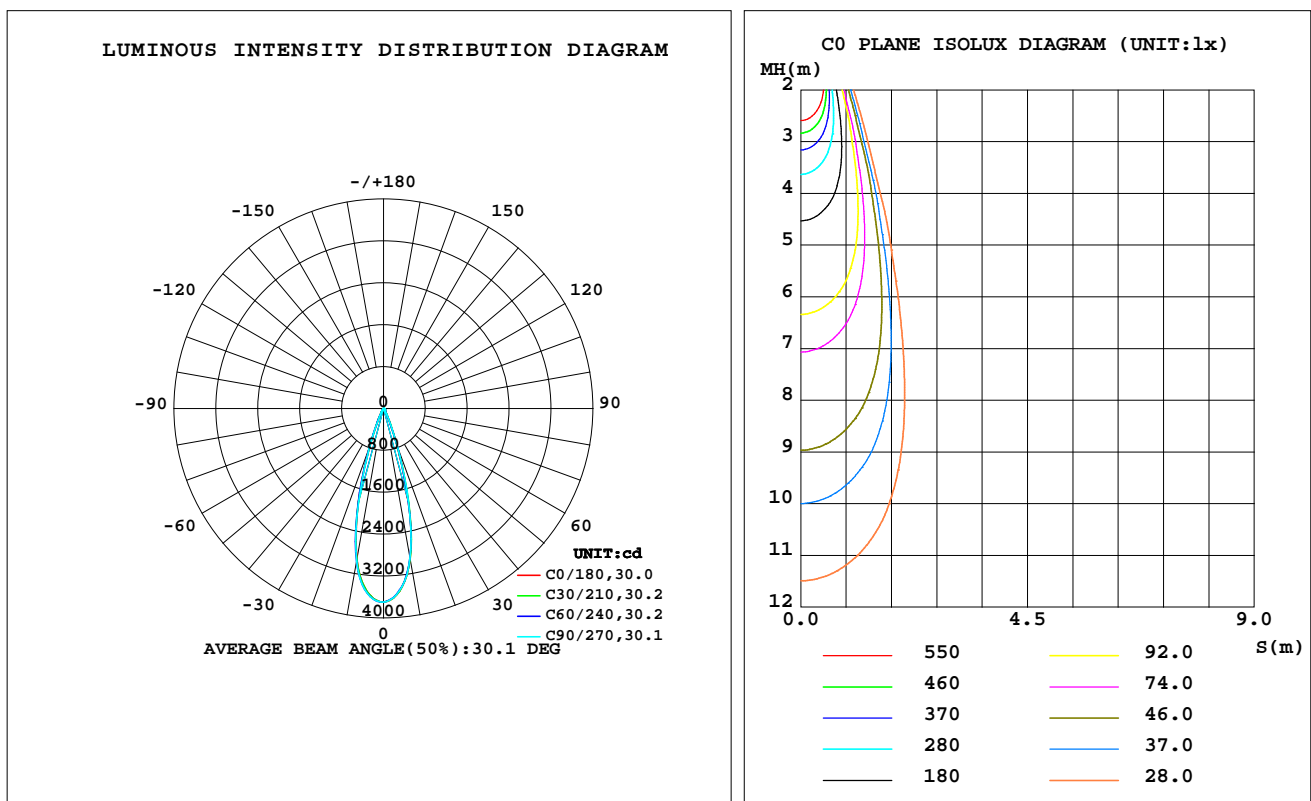

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084A 24R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	2920	2920	2916	2933	2929	2960	2960	2949	0- 10	317.9	317.9	31.2,23.7
20	788.6	788.8	786.7	823.2	813.9	812.0	804.5	790.6	10- 20	494.0	811.9	79.8,60.5
30	109.8	109.1	107.6	113.8	113.4	107.1	107.0	113.5	20- 30	146.5	958.4	94.2,71.4
40	32.88	33.11	33.36	32.82	31.99	31.88	32.52	33.31	30- 40	37.53	996.0	97.9,74.2
50	9.986	9.969	9.883	9.732	9.415	9.651	9.992	9.989	40- 50	14.72	1011	99.3,75.3
60	2.215	2.183	2.118	2.059	2.018	2.045	2.106	2.164	50- 60	4.431	1015	99.7,75.6
70	1.199	1.197	1.180	1.152	1.139	1.137	1.150	1.167	60- 70	1.570	1017	99.9,75.7
80	0.4890	0.4687	0.4667	0.4452	0.4582	0.4509	0.4677	0.4617	70- 80	0.8338	1018	100,75.8
90	0	0	0	0	0	0	0	0	80- 90	0.2313	1018	100,75.8
100	0	0	0	0	0	0	0	0	90-100	0	1018	100,75.8
110	0	0	0	0	0	0	0	0	100-110	0	1018	100,75.8
120	0	0	0	0	0	0	0	0	110-120	0	1018	100,75.8
130	0	0	0	0	0	0	0	0	120-130	0	1018	100,75.8
140	0	0	0	0	0	0	0	0	130-140	0	1018	100,75.8
150	0	0	0	0	0	0	0	0	140-150	0	1018	100,75.8
160	0	0	0	0	0	0	0	0	150-160	0	1018	100,75.8
170	0	0	0	0	0	0	0	0	160-170	0	1018	100,75.8
180	0	0	0	0	0	0	0	0	170-180	0	1018	100,75.8
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084A 24R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:120.08V I:0.1150A P:13.699W PF:0.9903 Freq:59.98Hz
Lamp Flux:1342.44x1 lm

NAME: 2118.564-LEA-28-H0

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2507030416

MFR.: RISE

SUR.: 0.001256m2

Shielding Angle:

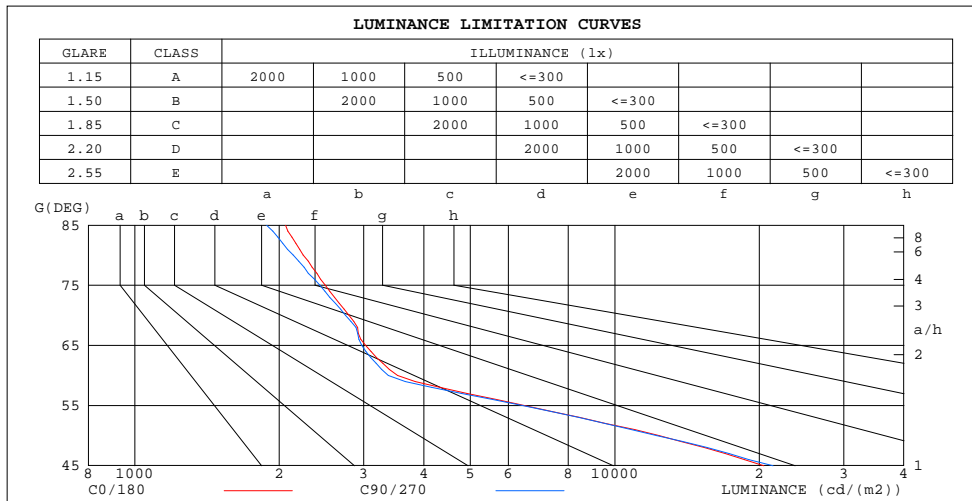

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	2060	1883
80	2244	2140
75	2494	2431
70	2794	2747
65	3026	2970
60	3530	3372
55	6495	6426
50	12379	12239
45	20447	21355

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03


Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084A 24R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.08V I:0.1150A P:13.699W PF:0.9903 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030416
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

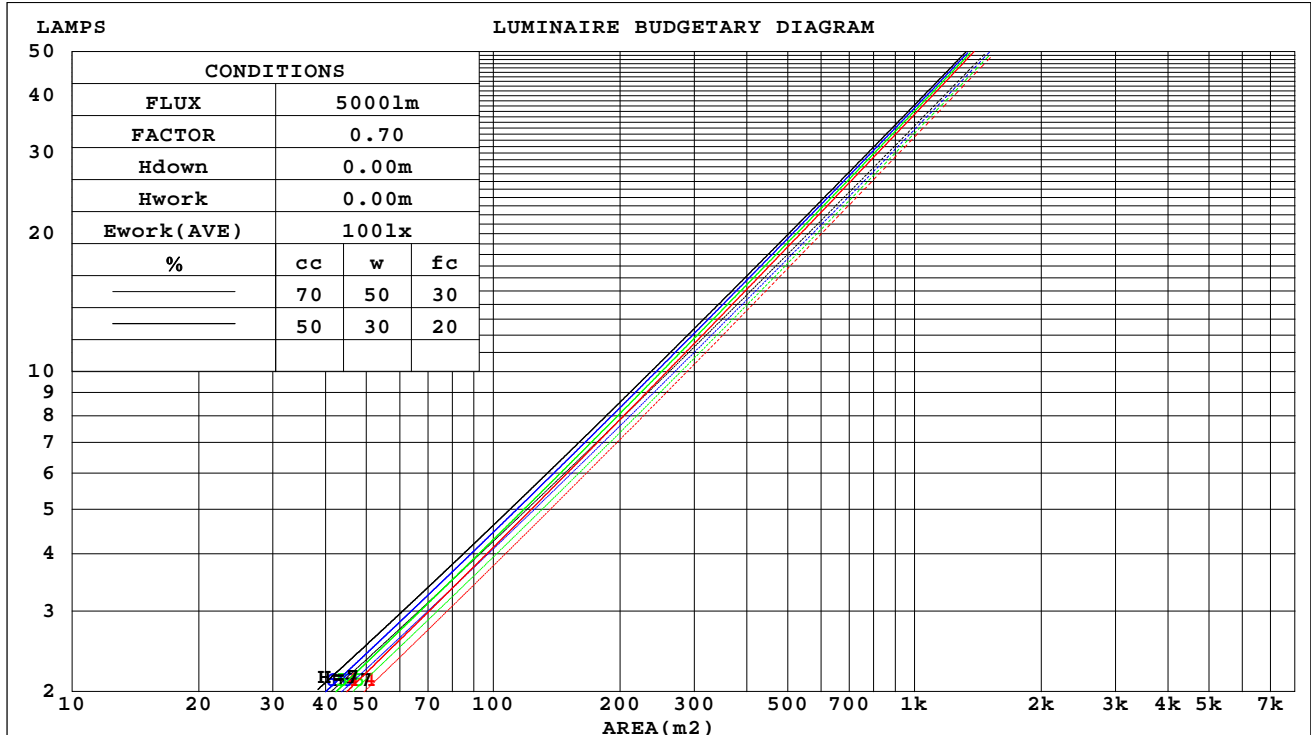

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084A 24R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

WEC AND CCEC

Test:U:120.08V I:0.1150A P:13.699W PF:0.9903 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030416
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0	
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.106	.060	.019	.101	.058	.018	.092	.053	.017	.083	.048	.015	.075	.044	.014		
2.0	.099	.054	.017	.094	.052	.016	.087	.048	.015	.080	.045	.014	.073	.041	.013		
3.0	.092	.049	.015	.089	.047	.014	.082	.044	.014	.076	.042	.013	.071	.039	.012		
4.0	.086	.045	.013	.083	.044	.013	.078	.041	.012	.073	.039	.012	.068	.037	.011		
5.0	.081	.042	.012	.079	.041	.012	.074	.039	.011	.070	.037	.011	.066	.035	.011		
6.0	.077	.039	.011	.075	.038	.011	.071	.036	.011	.067	.035	.010	.064	.034	.010		
7.0	.073	.036	.010	.072	.036	.010	.068	.034	.010	.065	.033	.010	.062	.032	.009		
8.0	.070	.034	.010	.068	.034	.010	.065	.033	.009	.062	.032	.009	.060	.031	.009		
9.0	.067	.032	.009	.065	.032	.009	.063	.031	.009	.060	.030	.009	.058	.029	.008		
10.0	.064	.031	.009	.063	.030	.008	.060	.030	.008	.058	.029	.008	.056	.028	.008		

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.144	.144	.144	.123	.123	.123	.084	.084	.084	.048	.048	.048	.015	.015	.015	
1.0	.128	.120	.112	.109	.103	.096	.075	.071	.067	.043	.041	.039	.014	.013	.013	
2.0	.114	.101	.089	.098	.087	.077	.067	.060	.054	.039	.035	.032	.012	.011	.010	
3.0	.103	.086	.072	.088	.074	.063	.061	.051	.044	.035	.030	.026	.011	.010	.008	
4.0	.094	.074	.059	.080	.064	.052	.055	.045	.036	.032	.026	.022	.010	.009	.007	
5.0	.086	.065	.050	.074	.056	.043	.051	.039	.030	.029	.023	.018	.009	.008	.006	
6.0	.079	.057	.042	.068	.050	.036	.047	.035	.026	.027	.020	.015	.009	.007	.005	
7.0	.073	.051	.036	.063	.044	.031	.044	.031	.022	.025	.018	.013	.008	.006	.004	
8.0	.069	.046	.031	.059	.040	.027	.041	.028	.019	.024	.017	.011	.008	.005	.004	
9.0	.064	.042	.027	.055	.036	.023	.038	.026	.017	.022	.015	.010	.007	.005	.003	
10.0	.061	.038	.023	.052	.033	.020	.036	.023	.015	.021	.014	.009	.007	.005	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084A 24R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:120.08V I:0.1150A P:13.699W PF:0.9903 Freq:59.98Hz Lamp Flux:1342.44x1 lm										
NAME: 2118.564-LEA-28-H0					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2507030416		
MFR.: RISE					SUR.: 0.001256m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.7	12.4	11.9	12.6	12.7	11.6	12.3	11.8	12.4	12.6
3H	11.7	12.3	11.9	12.5	12.7	11.5	12.2	11.8	12.3	12.5
4H	11.7	12.2	11.9	12.5	12.7	11.5	12.1	11.8	12.3	12.5
6H	11.6	12.2	11.9	12.4	12.6	11.5	12.0	11.7	12.3	12.5
8H	11.6	12.1	11.9	12.4	12.6	11.4	12.0	11.7	12.2	12.5
12H	11.6	12.1	11.9	12.3	12.6	11.4	11.9	11.7	12.2	12.4
4H 2H	11.6	12.2	11.8	12.4	12.6	11.4	12.0	11.7	12.2	12.4
3H	11.5	12.1	11.8	12.3	12.6	11.4	11.9	11.7	12.2	12.4
4H	11.5	12.0	11.9	12.3	12.6	11.4	11.8	11.7	12.1	12.4
6H	11.5	11.9	11.9	12.2	12.6	11.3	11.8	11.7	12.1	12.4
8H	11.5	11.9	11.9	12.2	12.6	11.3	11.7	11.7	12.1	12.4
12H	11.4	11.8	11.8	12.2	12.6	11.3	11.6	11.7	12.0	12.4
8H 4H	11.4	11.8	11.8	12.1	12.5	11.3	11.7	11.6	12.0	12.4
6H	11.4	11.7	11.8	12.1	12.5	11.2	11.6	11.7	12.0	12.4
8H	11.4	11.7	11.8	12.1	12.5	11.2	11.5	11.7	11.9	12.4
12H	11.4	11.6	11.8	12.0	12.5	11.2	11.5	11.7	11.9	12.4
12H 4H	11.4	11.7	11.8	12.1	12.5	11.2	11.6	11.6	11.9	12.3
6H	11.3	11.6	11.8	12.1	12.5	11.2	11.5	11.6	11.9	12.3
8H	11.3	11.6	11.8	12.0	12.5	11.2	11.4	11.6	11.9	12.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.3 / - 5.2					+ 2.4 / - 5.3				
1.5H	+ 3.6 / - 4.4					+ 3.7 / - 4.7				
2.0H	+ 4.5 / - 3.8					+ 4.8 / - 4.0				

CIE Pub.117, 1342 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.0)
Area: 0.001256 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084A 24R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:120.08V I:0.1150A P:13.699W PF:0.9903 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030416
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	68	64	61	68	64	61	67	64	61	59
0.80	74	70	67	73	69	67	72	69	67	64
1.00	77	73	70	76	73	70	75	72	70	67
1.25	79	76	73	79	75	73	77	75	73	70
1.50	81	78	76	80	78	75	79	76	75	71
2.00	83	80	78	82	79	77	80	78	76	72
2.50	84	82	79	83	81	79	81	79	77	73
3.00	85	83	81	84	82	80	81	80	78	74
4.00	87	85	83	85	84	82	82	81	80	75
5.00	88	86	85	86	85	84	83	82	81	76
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084A 24R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:120.08V I:0.1150A P:13.699W PF:0.9903 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030416
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

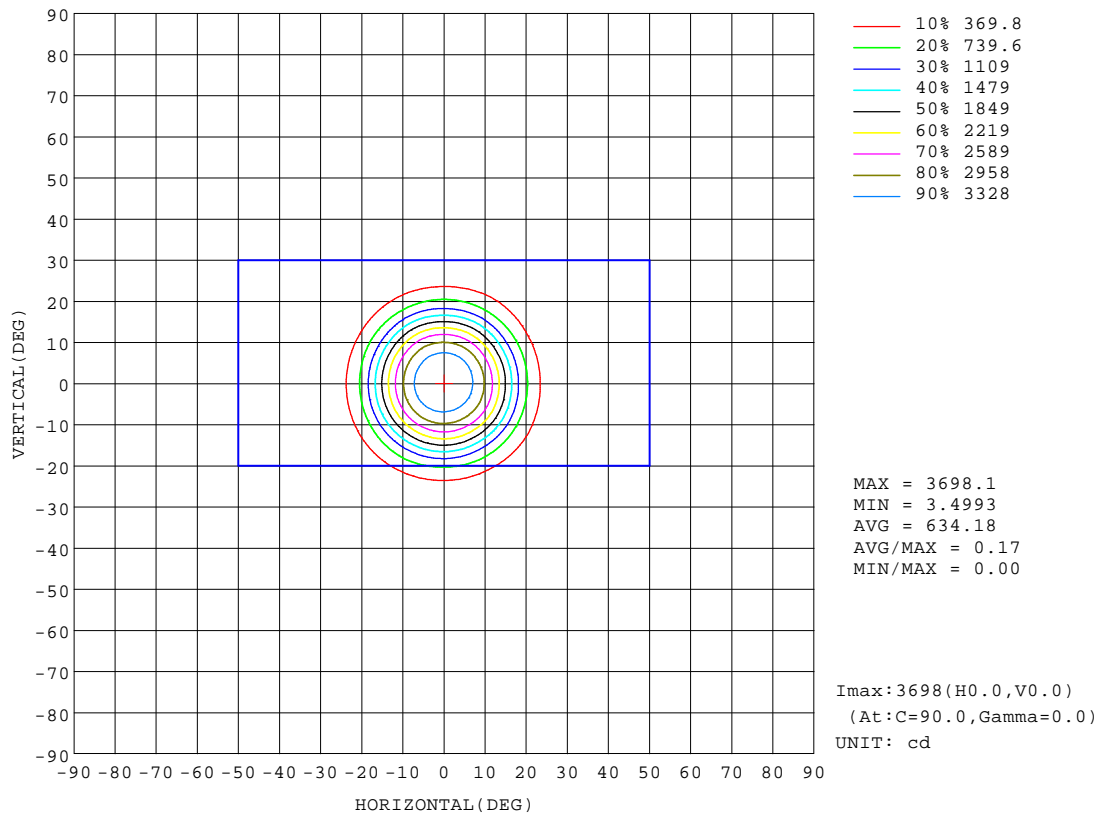


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084A 24R
DRIVER:PUP20A-1WMC 600mA
30minutes warm-up

AAI Figure

Test:U:120.08V I:0.1150A P:13.699W PF:0.9903 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030416
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

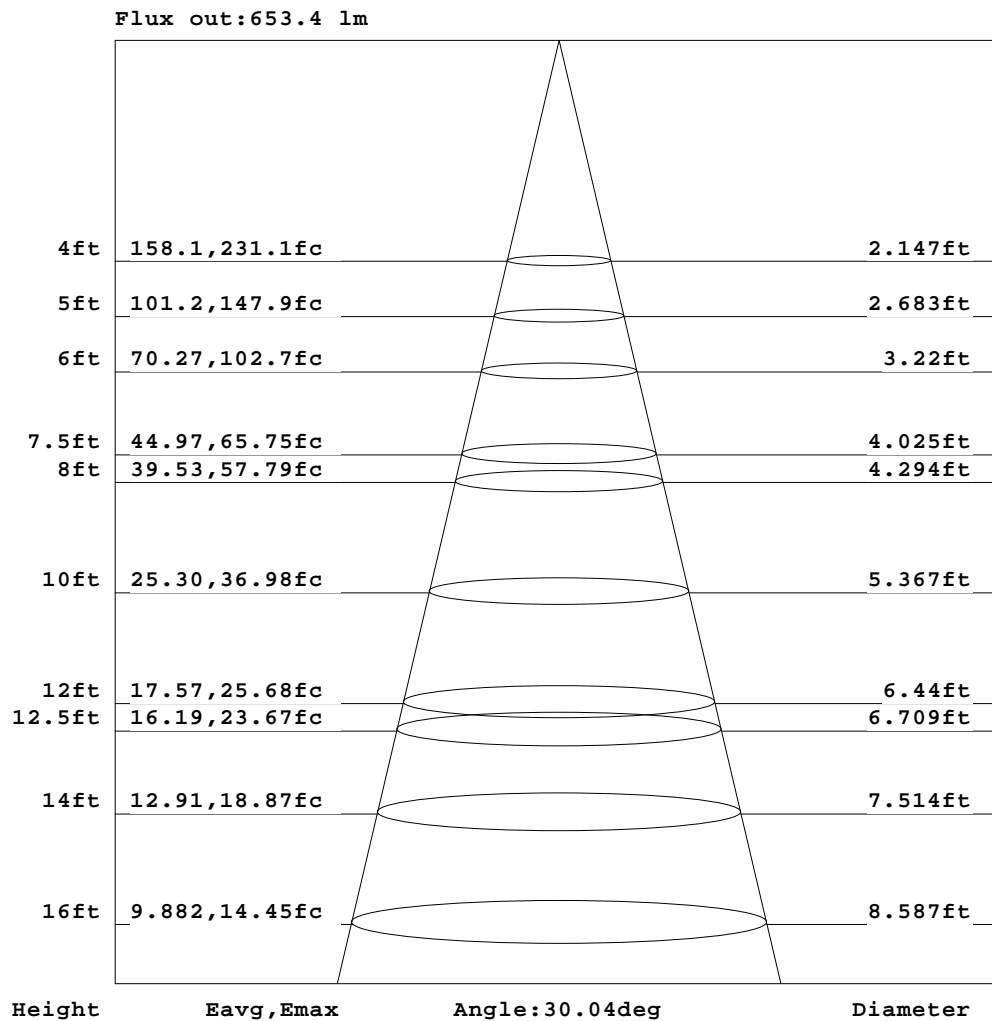

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084A 24R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

ISOLUX DIAGRAM

Test:U:120.08V I:0.1150A P:13.699W PF:0.9903 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030416
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

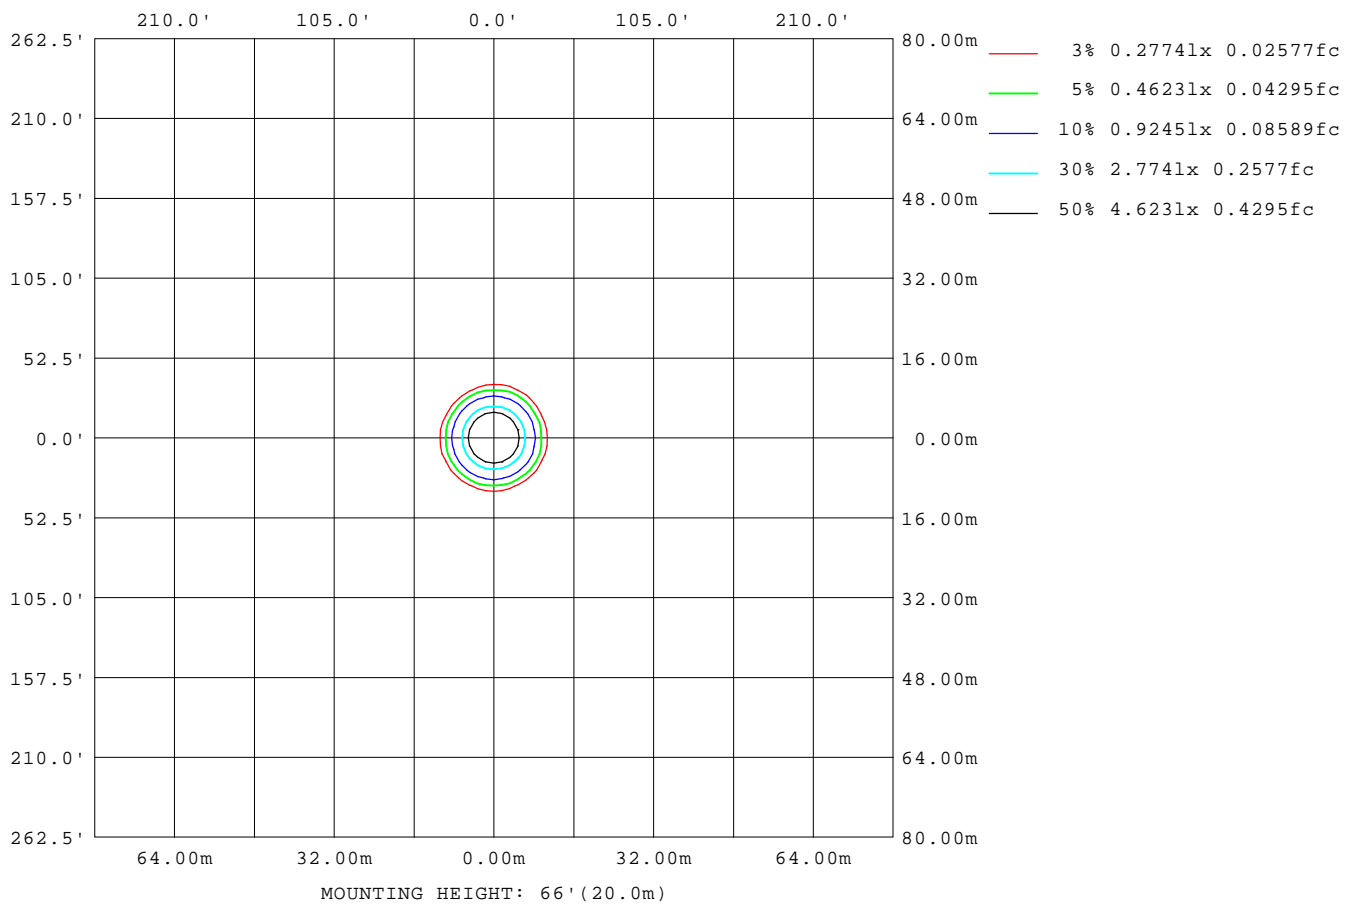

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084A 24R
DRIVER:PUP20A-1WMC 600mA
30minutes warm-up

LED Avg.L Report

Test:U:120.08V I:0.1150A P:13.699W PF:0.9903 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030416
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2928
L_0~180(75)av	2426
L_0~180(85)av	1970
L_90~270(65)av	2920
L_90~270(75)av	2411
L_90~270(85)av	1920
L_45(65)av	2921
L_45(75)av	2380
L_45(85)av	1794

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084A 24R
DRIVER:PUP20A-1WMC 600mA
30minutes warm-up

Planar Illuminance Curve

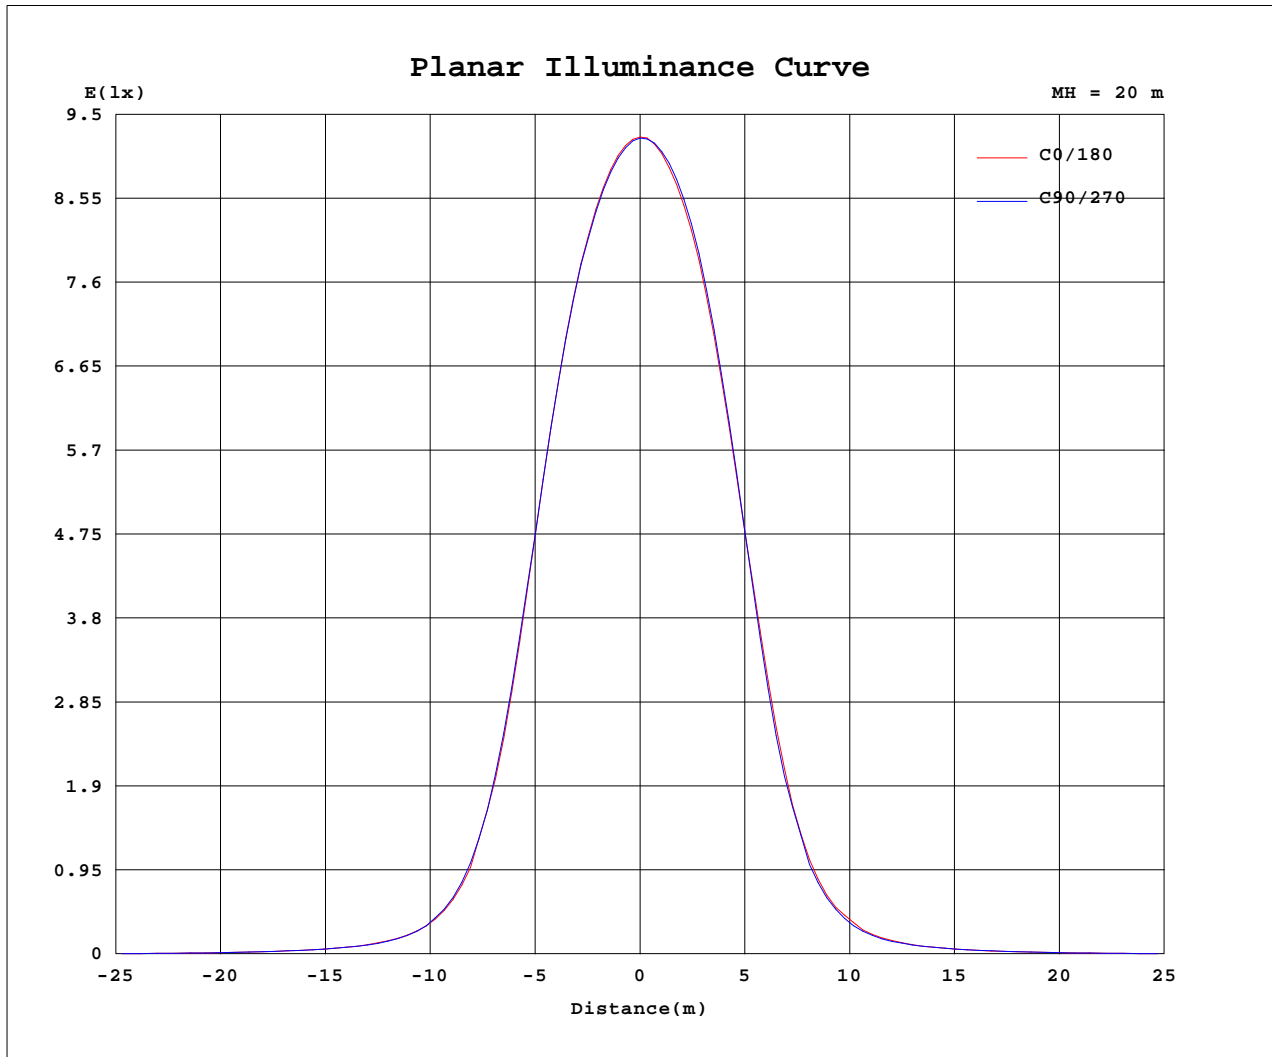

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2025-7-03

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXRH-30G10T0-G-83 Ra:90
 LENS: PM-1084A 24R
 DRIVER: PUP20A-1WMC 600mA

30minutes warm-up

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.08V I:0.1150A P:13.699W PF:0.9903 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030416
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	3695	3695	3695	3695	3695	3695	3695	3695	3695	3695	3695	3695						
5	3506	3505	3488	3499	3511	3517	3520	3523	3546	3548	3547	3527						
10	2920	2928	2911	2916	2933	2934	2929	2942	2978	2960	2963	2934						
15	1834	1868	1836	1853	1865	1877	1875	1874	1905	1858	1880	1835						
20	789	785	792	787	828	818	814	820	804	805	795	786						
25	266	282	269	273	281	286	285	274	276	273	288	265						
30	110	113	106	108	112	115	113	109	105	107	118	110						
35	55.8	56.4	54.9	55.9	56.8	57.1	55.9	54.7	54.4	55.5	58.7	56.0						
40	32.9	33.4	32.8	33.4	33.0	32.7	32.0	31.5	32.2	32.5	33.7	32.9						
45	18.1	19.1	18.7	19.0	18.0	18.2	17.2	17.2	18.3	17.9	18.9	18.4						
50	9.99	10.0	9.93	9.88	9.74	9.72	9.42	9.47	9.83	9.99	10.1	9.88						
55	4.67	4.77	4.59	4.63	4.45	4.51	4.38	4.31	4.48	4.73	4.63	4.48						
60	2.21	2.21	2.15	2.12	2.07	2.05	2.02	2.02	2.07	2.11	2.14	2.18						
65	1.60	1.61	1.58	1.58	1.55	1.53	1.50	1.49	1.51	1.52	1.56	1.58						
70	1.20	1.20	1.19	1.18	1.15	1.15	1.14	1.13	1.14	1.15	1.16	1.17						
75	0.81	0.80	0.79	0.79	0.76	0.76	0.77	0.75	0.77	0.78	0.78	0.78						
80	0.49	0.47	0.46	0.47	0.45	0.45	0.46	0.44	0.46	0.47	0.46	0.46						
85	0.23	0.21	0.20	0.21	0.18	0.19	0.21	0.19	0.20	0.21	0.20	0.20						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084A 24R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up