
URISE

AMAFI-85V-RTLF



Product specification

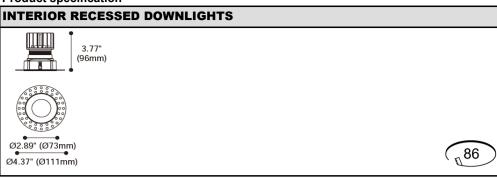

Technical Specification				
Article number	2118.622E-AC	2118.622E-ACOT-36		
LED Consumption	14W	14W		
Fixture Consumption	15W	15W		
Current / Voltage	350mA / 38.3\	350mA / 38.3Vdc		
CRI	90+			
сст	2700K	3000K	4000K	
LED Lumen *1	1139lm	1193lm	1282lm	
Delivered Lumen	-	975lm	-	
Beam Angle available	15°/24°/36°/50	15°/24°/36°/50° (Lens)		
Driver Technical Specification (Remote	d)			
Driver Brand -	Driver Model		-	
Input voltage / Freqency range -	Output Curre	Output Current / Voltage		-
Dimming / Flicker -	Certification	Certification		
Power Factor -	Warranty		-	

Technical character		Materials	Materials	
Products Standard	IEC 60598-1	Luminaire	Aluminum die cast	
	IEC 62031	Trim	Aluminum die cast	
Insulation	CLASS II	Optics	PMMA Lens	
Protection	IP44	Heat sink	Forged aluminum	
Tilt / Rotate	-	Fixture color available	white / black	
Operating temperature	0~35°C	Baffle	PC	
Average Failure Time		Baffle Color available	white / black / Chrome	

Accessories







H7-1 Honeycomb louver



DS7-1 Diffusion sheet



WG7-1 Woven glass

Photometric



60		15°	
	1.0	0.24	12023
\times	2.0	0.48	3006
	3.0	0.72	1336
30	4.0	0.96	751
026 cd	5.0	1.20	480

2.0

3.0

4.0

50°

1.94

2.91

3.88

349

155

87



11/	1	h(
.60	60		
\checkmark	$+\times$	1.0	0
\times		2.	0
\checkmark $/\!\!\!\!/$	T	3.	0
30	30	4.	0
\checkmark	4590 cd	5.	0

1			
		24°	
1	1.0	0.46	4604
	2.0	0.93	1151
	3.0	1.39	511
)	4.0	1.86	287
1	5.0	2.32	184

Remarks



