




STARLUX-EYE-RTA



Product specification

INTERIOR RECESSED DOWNLIGHTS



 Cut out :
 $2\frac{4}{32}$ " (54mm)

Technical Specification


| | | | |
|-------------------------|------------------------|-------|-------|
| Article number | 2218.511-LEA-09B | | |
| LED Consumption | 10W | | |
| Fixture Consumption | 10W | | |
| Current / Voltage | 500mA / 18.3Vdc | | |
| CRI | 90+ | | |
| CCT | 3000K | 3000K | 3000K |
| LED Lumen ^{*1} | 871lm | 913lm | 981lm |
| Delivered Lumen | - | - | - |
| Beam Angle available | 15°/24°/36°/50° (Lens) | | |

Driver Technical Specification (Remoted)

| | | | |
|---------------------------------|---|--------------------------|---|
| Driver Brand | - | Driver Model | - |
| Input voltage / Frequency range | - | Output Current / Voltage | - |
| Dimming / Flicker | - | Certification | - |
| Power Factor | - | Warranty | - |

| Technical character | | Materials | |
|-----------------------|----------------|-------------------------|-------------------|
| Products Standard | UL2108 | Luminaire | Aluminum die cast |
| | - | Trim | Aluminum die cast |
| Insulation | CLASS III | Optics | PMMA Lens |
| Protection | Damp Location | Heat sink | Forged aluminum |
| Tilt / Rotate | 0~30° / 0~355° | Fixture color available | white / black |
| Operating temperature | 0~35°C | Baffle | Aluminum die cast |
| Average Failure Time | - | Baffle Color available | white / black |

Accessories


 ACHO-18
 honeycomb louver
 +PC sheet

 SG-002
 Striped Glass

Photometric

Remarks




*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS



KIG-040-DWJ

Triac/Phase, 0-10V, 1-10V, Potentiometer,
10V PWM 5 in 1 dimming
40W, 1-3T
Type: Gear box

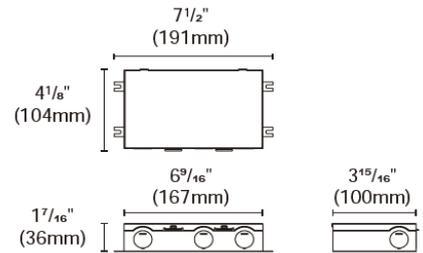


ACCH-12-60X180 for Multiple 1T/2T/3T

Type: New construction plate

Cut out:

- 1T : 2¹/₂"x2¹/₂" (60x60mm)
- 2T : 2¹/₂"x4²/₃" (60x120mm)
- 3T : 2¹/₂"x7³/₃₂" (60x180mm)



* Cutout accessories are available for different cutout dimensions




ACCH-12G-60X180 for Multiple 1T/2T

Type: IC Box


Cut out:

- 1T : 2¹/₂"x2¹/₂" (60x60mm)
- 2T : 2¹/₂"x4²/₃" (60x120mm)

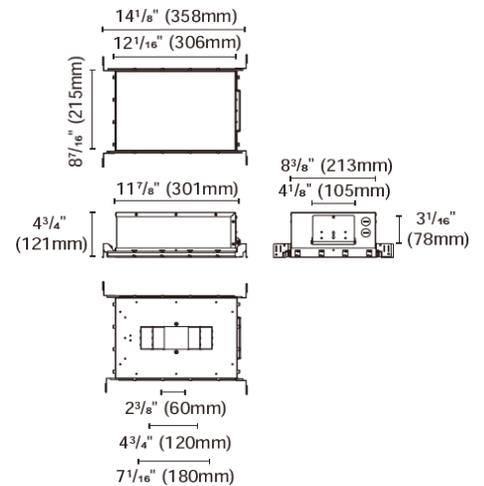

* Cutout accessories are available for different cutout dimensions

Cutout accessories



ACCI-10-R54-R60 for round

Cut out:

- Trim : 2¹/₂" (54mm)
- Trimless : 2¹/₂" (60mm)

INSTALLATION OPTIONS

Optional driver available



KIG-040-DW
Type: Drive

Triac / 0-10V/1-10V/Potentiometer/10V
PWM 5 in 1 Dimmable LED driver
Multi-current output series 40W
For 1-3T



PUP10A-1WMC-700
Type: Driver

0/1-10V
Output: 500mA/2-20V/10W
400mA/2-21V/8.4W
For 1T



PUP20A-1WMC
Type: Drive

0/1-10V
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1-2T



PUP10T-1LMC-700
Type: Driver

Triac
Output: 500mA/2-20VDC/10W
400mA/2-21VDC/8.4W
For 1T



PUP20T-1LMC
Type: Driver

Triac
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1-2T



PUP10D-1WMC-700
Type: Driver

Dali
Output: 500mA/2-20V/10W
400mA/2-21V/8.4W
For 1T



PUP20D-1WMC
Type: Driver

Dali
Output: 500mA/9-40V/20W
400mA/9-45V/18W
For 1-2T



ACOT-106
Type: Quick connector