

### Luminaire Photograph



Light Output Ratio:	74.6%	
Luminaire Power:	7.578 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	0.30	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-6-3

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

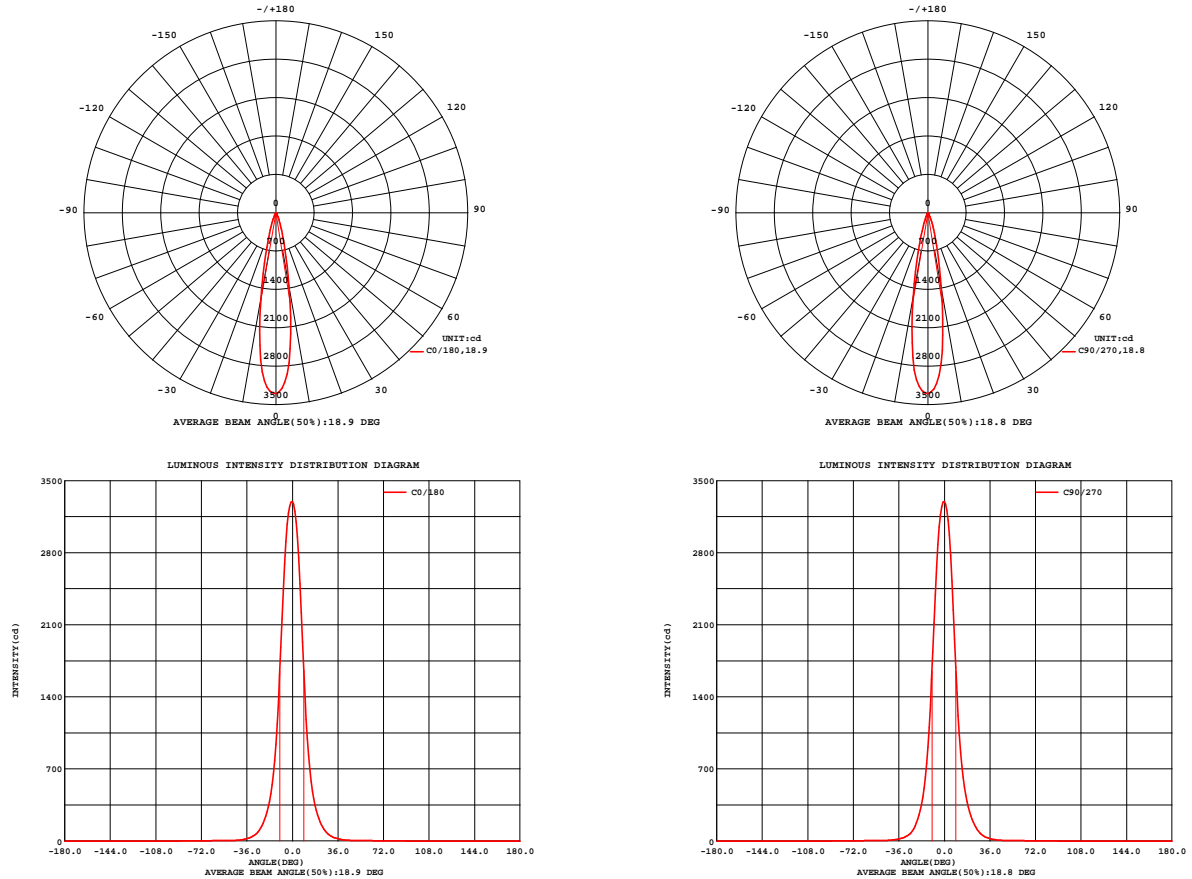


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-6-3

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.16V I:0.0375A P:7.5779W PF:0.9130 Freq:49.99Hz Lamp Flux:663.4x1 lm		
NAME: 2318.203-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2306030723
MFR.: RISE	SUR.: 0.000572265m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 65.34 lm/W			
MODEL	CREE	I <sub>max</sub> (cd)	3297	S/MH(C0/180)	0.33
NOMINAL POWER(W)	7	LOR(%)	74.6	S/MH(C90/270)	0.33
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	495.11	η UP,DN(C0-180)	0.0,37.2
NOMINAL FLUX(lm)	663.4	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,37.4
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	η down(%)	74.6	CIBSE SHR MAX	0.30

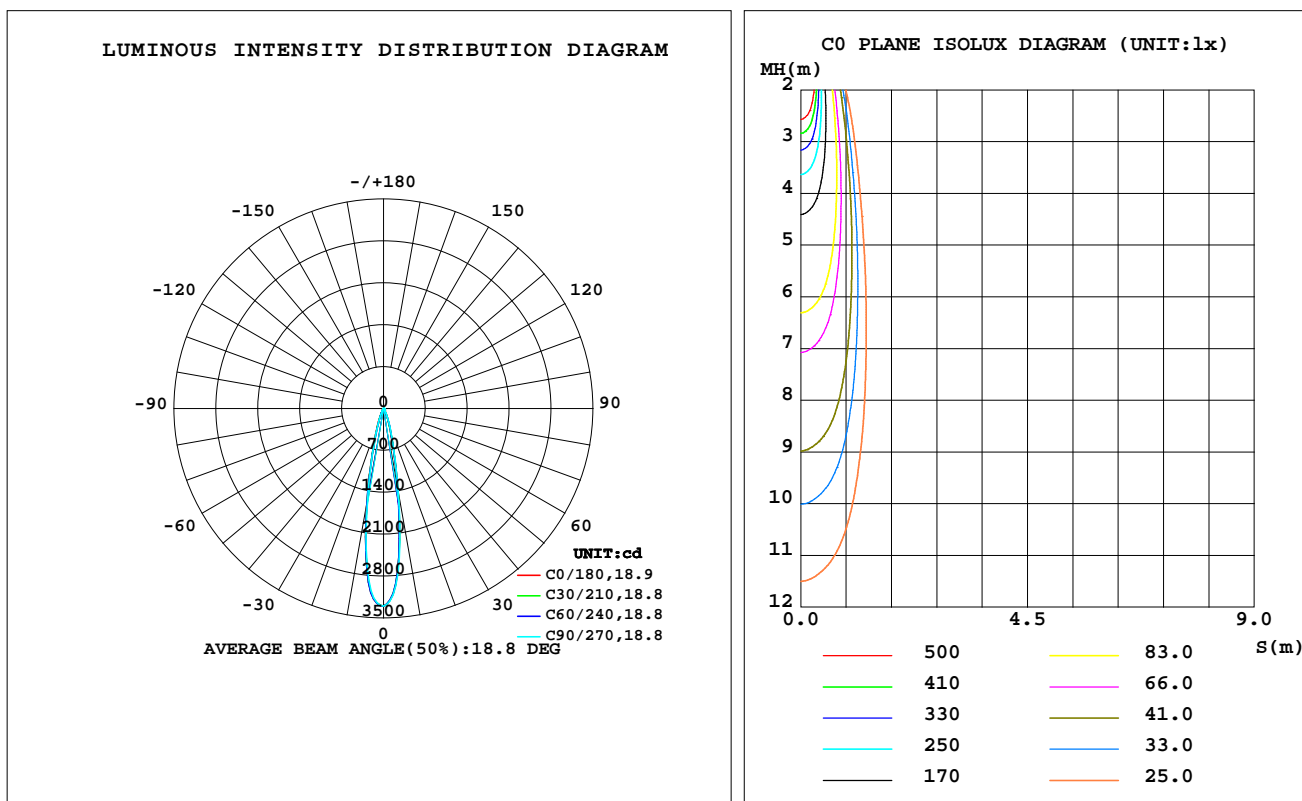

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-6-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	1401	1387	1435	1542	1608	1622	1568	1460	0- 10	224.0	224.0	45.2,33.8
20	254.3	267.8	283.8	296.6	281.8	262.1	254.3	248.9	10- 20	183.0	407.0	82.2,61.4
30	50.64	55.18	57.46	58.49	53.78	48.25	44.17	45.15	20- 30	58.06	465.1	93.9,70.1
40	12.31	12.66	12.77	13.12	12.31	11.71	11.60	11.74	30- 40	16.94	482.0	97.4,72.7
50	5.145	5.194	5.171	5.082	4.838	4.853	4.986	5.063	40- 50	5.380	487.4	98.4,73.5
60	3.873	3.888	3.861	3.814	3.710	3.688	3.741	3.797	50- 60	3.956	491.4	99.2,74.1
70	1.598	1.582	1.602	1.666	1.713	1.730	1.705	1.637	60- 70	2.705	494.1	99.8,74.5
80	0.2990	0.2871	0.3057	0.3397	0.3684	0.3722	0.3607	0.3142	70- 80	0.9439	495.0	100,74.6
90	0	0	0	0	0	0	0	0	80- 90	0.0996	495.1	100,74.6
100	0	0	0	0	0	0	0	0	90-100	0	495.1	100,74.6
110	0	0	0	0	0	0	0	0	100-110	0	495.1	100,74.6
120	0	0	0	0	0	0	0	0	110-120	0	495.1	100,74.6
130	0	0	0	0	0	0	0	0	120-130	0	495.1	100,74.6
140	0	0	0	0	0	0	0	0	130-140	0	495.1	100,74.6
150	0	0	0	0	0	0	0	0	140-150	0	495.1	100,74.6
160	0	0	0	0	0	0	0	0	150-160	0	495.1	100,74.6
170	0	0	0	0	0	0	0	0	160-170	0	495.1	100,74.6
180	0	0	0	0	0	0	0	0	170-180	0	495.1	100,74.6
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-6-3

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up

## LUMINANCE LIMITATION CURVES

Test:U:220.16V I:0.0375A P:7.5779W PF:0.9130 Freq:49.99Hz  
Lamp Flux:663.4x1 lm

NAME: 2318.203-ACOT-96

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2306030723

MFR.: RISE

SUR.: 0.000572265m2

Shielding Angle:

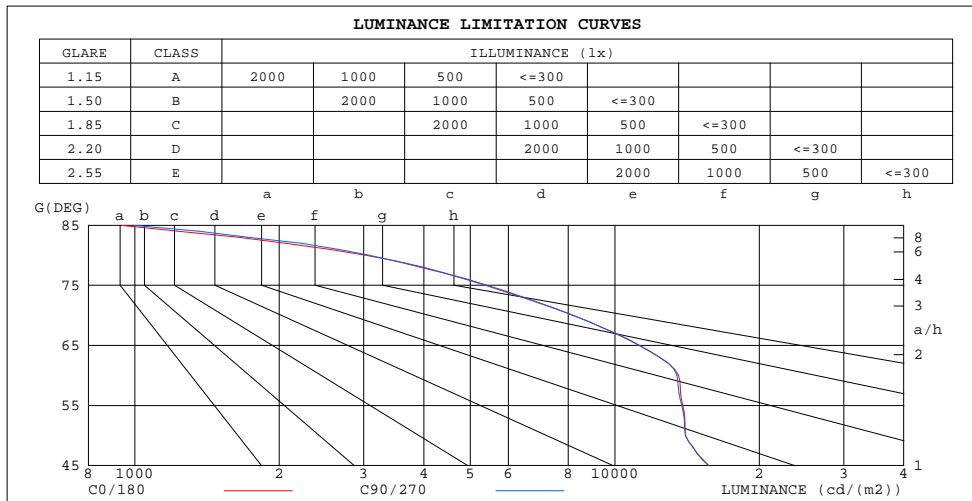

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	940	993
80	3017	3073
75	5415	5368
70	8186	8178
65	11235	11270
60	13575	13477
55	13864	13793
50	14029	14041
45	15692	15719


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3°C  
Operators:zoe  
Test Date:2023-6-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.16V I:0.0375A P:7.5779W PF:0.9130 Freq:49.99Hz Lamp Flux:663.4x1 lm		
NAME: 2318.203-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2306030723
MFR.: RISE	SUR.: 0.000572265m2	Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

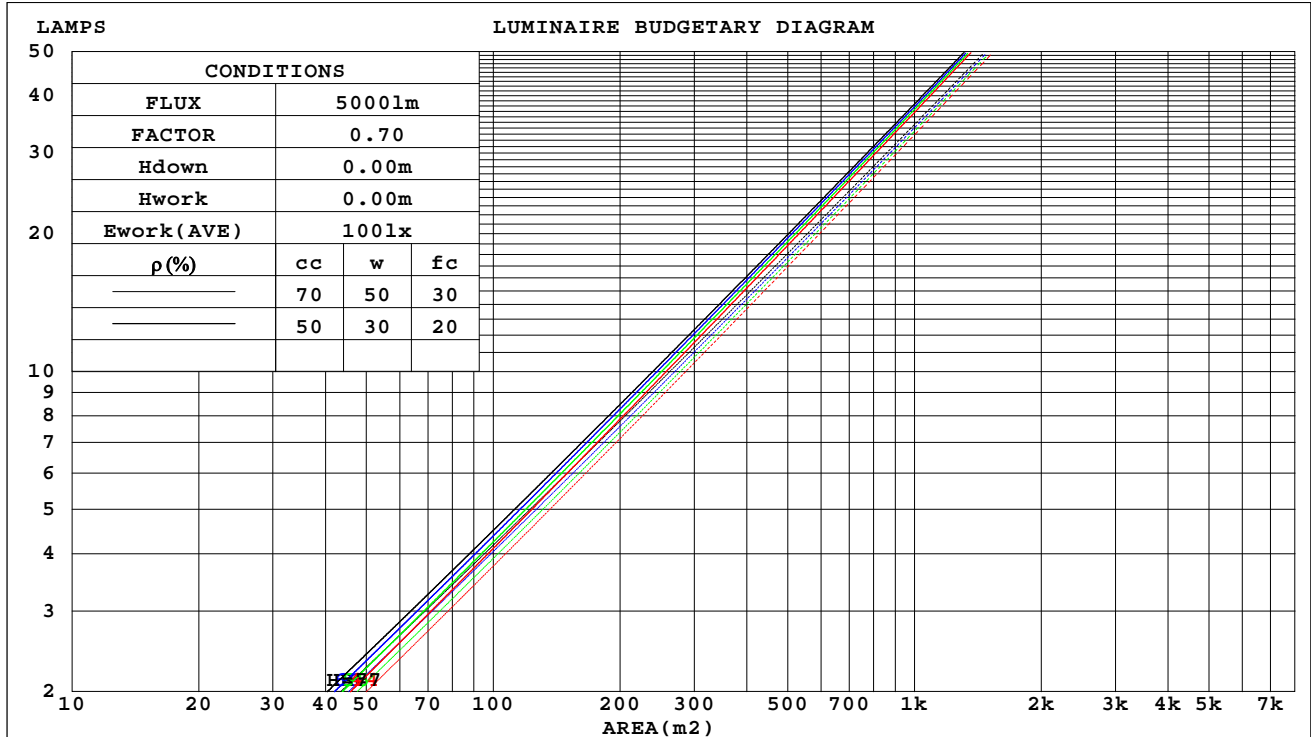

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-6-3

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up

### WEC AND CCEC

Test:U:220.16V I:0.0375A P:7.5779W PF:0.9130 Freq:49.99Hz Lamp Flux:663.4x1 lm		
NAME: 2318.203-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2306030723
MFR.: RISE	SUR.: 0.000572265m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.100	.057	.018	.095	.054	.017	.085	.049	.016	.077	.044	.014	.069	.040	.013	
2.0	.092	.050	.015	.088	.048	.015	.080	.045	.014	.073	.041	.013	.067	.038	.012	
3.0	.085	.045	.014	.082	.044	.013	.076	.041	.012	.070	.038	.012	.064	.036	.011	
4.0	.080	.041	.012	.077	.040	.012	.071	.038	.011	.066	.036	.011	.062	.034	.010	
5.0	.074	.038	.011	.072	.037	.011	.068	.035	.010	.063	.033	.010	.059	.032	.010	
6.0	.070	.035	.010	.068	.034	.010	.064	.033	.010	.061	.031	.009	.057	.030	.009	
7.0	.066	.033	.009	.065	.032	.009	.061	.031	.009	.058	.030	.009	.055	.029	.008	
8.0	.063	.031	.009	.061	.030	.009	.058	.029	.008	.056	.028	.008	.053	.027	.008	
9.0	.060	.029	.008	.059	.029	.008	.056	.028	.008	.054	.027	.008	.051	.026	.008	
10.0	.057	.027	.008	.056	.027	.008	.054	.026	.007	.052	.026	.007	.050	.025	.007	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.142	.142	.142	.121	.121	.121	.083	.083	.083	.048	.048	.048	.015	.015	.015		
1.0	.125	.118	.111	.107	.101	.095	.073	.069	.066	.042	.040	.038	.014	.013	.012		
2.0	.112	.099	.088	.096	.085	.076	.066	.059	.053	.038	.034	.031	.012	.011	.010		
3.0	.100	.085	.072	.086	.073	.062	.059	.051	.044	.034	.030	.026	.011	.010	.008		
4.0	.091	.073	.059	.078	.063	.052	.054	.044	.036	.031	.026	.021	.010	.008	.007		
5.0	.083	.064	.050	.071	.055	.043	.049	.039	.031	.028	.023	.018	.009	.007	.006		
6.0	.076	.056	.042	.065	.049	.037	.045	.034	.026	.026	.020	.015	.008	.007	.005		
7.0	.070	.050	.036	.060	.043	.031	.042	.030	.022	.024	.018	.013	.008	.006	.004		
8.0	.065	.045	.031	.056	.039	.027	.039	.027	.019	.023	.016	.011	.007	.005	.004		
9.0	.061	.041	.027	.052	.035	.024	.036	.025	.017	.021	.015	.010	.007	.005	.003		
10.0	.057	.037	.024	.049	.032	.021	.034	.023	.015	.020	.013	.009	.006	.004	.003		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-6-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:220.16V I:0.0375A P:7.5779W PF:0.9130 Freq:49.99Hz Lamp Flux:663.4x1 lm										
NAME: 2318.203-ACOT-96					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2306030723		
MFR.: RISE					SUR.: 0.000572265m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.1	15.7	15.3	15.9	16.0	15.3	15.9	15.5	16.0	16.2
3H	15.6	16.2	15.9	16.4	16.6	15.8	16.3	16.0	16.5	16.7
4H	15.7	16.3	16.0	16.5	16.7	15.8	16.4	16.1	16.6	16.8
6H	15.7	16.2	16.0	16.4	16.7	15.8	16.3	16.1	16.6	16.8
8H	15.7	16.2	15.9	16.4	16.7	15.8	16.3	16.1	16.5	16.8
12H	15.6	16.1	15.9	16.4	16.6	15.7	16.2	16.1	16.5	16.8
4H 2H	15.4	15.9	15.6	16.1	16.3	15.5	16.1	15.8	16.3	16.5
3H	16.0	16.4	16.3	16.7	17.0	16.1	16.6	16.4	16.8	17.1
4H	16.1	16.5	16.4	16.8	17.1	16.2	16.6	16.5	16.9	17.2
6H	16.1	16.5	16.4	16.8	17.1	16.2	16.6	16.5	16.9	17.2
8H	16.0	16.4	16.4	16.7	17.1	16.1	16.5	16.5	16.8	17.2
12H	16.0	16.3	16.4	16.7	17.1	16.1	16.4	16.5	16.8	17.2
8H 4H	16.0	16.4	16.4	16.7	17.1	16.1	16.5	16.5	16.8	17.2
6H	16.0	16.3	16.4	16.7	17.1	16.1	16.4	16.5	16.8	17.2
8H	16.0	16.3	16.4	16.7	17.1	16.1	16.4	16.5	16.8	17.2
12H	15.9	16.2	16.4	16.6	17.1	16.0	16.3	16.5	16.7	17.2
12H 4H	16.0	16.3	16.4	16.7	17.1	16.1	16.4	16.5	16.8	17.2
6H	16.0	16.2	16.4	16.7	17.1	16.1	16.3	16.5	16.8	17.2
8H	15.9	16.2	16.4	16.6	17.1	16.0	16.3	16.5	16.7	17.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.2 / - 1.2					+ 1.4 / - 1.3				
1.5H	+ 2.4 / - 1.0					+ 2.8 / - 1.1				
2.0H	+ 0.3 / - 0.7					+ 0.3 / - 0.7				

CIE Pub.117, 663.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.4)  
Area: 0.000572265 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-6-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:220.16V I:0.0375A P:7.5779W PF:0.9130 Freq:49.99Hz Lamp Flux:663.4x1 lm		
NAME: 2318.203-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2306030723
MFR.: RISE	SUR.: 0.000572265m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	67	63	60	67	63	60	66	62	60	57
0.80	72	68	66	72	68	66	71	68	65	63
1.00	75	71	69	75	71	69	74	71	68	66
1.25	78	74	72	77	74	72	76	73	71	68
1.50	80	77	74	79	76	74	77	75	73	70
2.00	82	79	76	81	78	76	79	76	75	71
2.50	83	80	78	82	79	77	79	77	76	72
3.00	84	81	80	83	80	79	80	78	77	72
4.00	85	83	82	84	82	81	81	80	79	74
5.00	86	85	83	85	83	82	82	81	80	74
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3°C  
Operators:zoe  
Test Date:2023-6-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:220.16V I:0.0375A P:7.5779W PF:0.9130 Freq:49.99Hz Lamp Flux:663.4x1 lm		
NAME: 2318.203-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2306030723
MFR.: RISE	SUR.: 0.000572265m2	Shielding Angle:

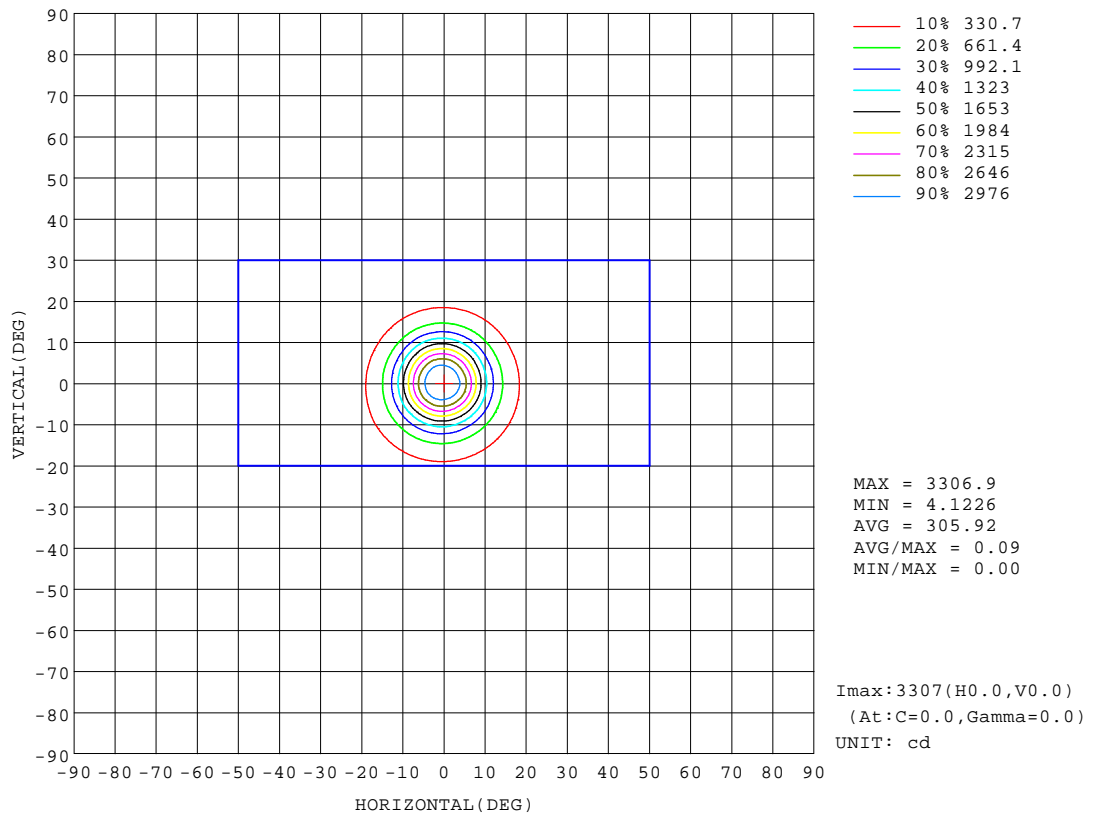


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3°C  
Operators:zoe  
Test Date:2023-6-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up

## AAI Figure

Test:U:220.16V I:0.0375A P:7.5779W PF:0.9130 Freq:49.99Hz Lamp Flux:663.4x1 lm		
NAME: 2318.203-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2306030723
MFR.: RISE	SUR.: 0.000572265m2	Shielding Angle:

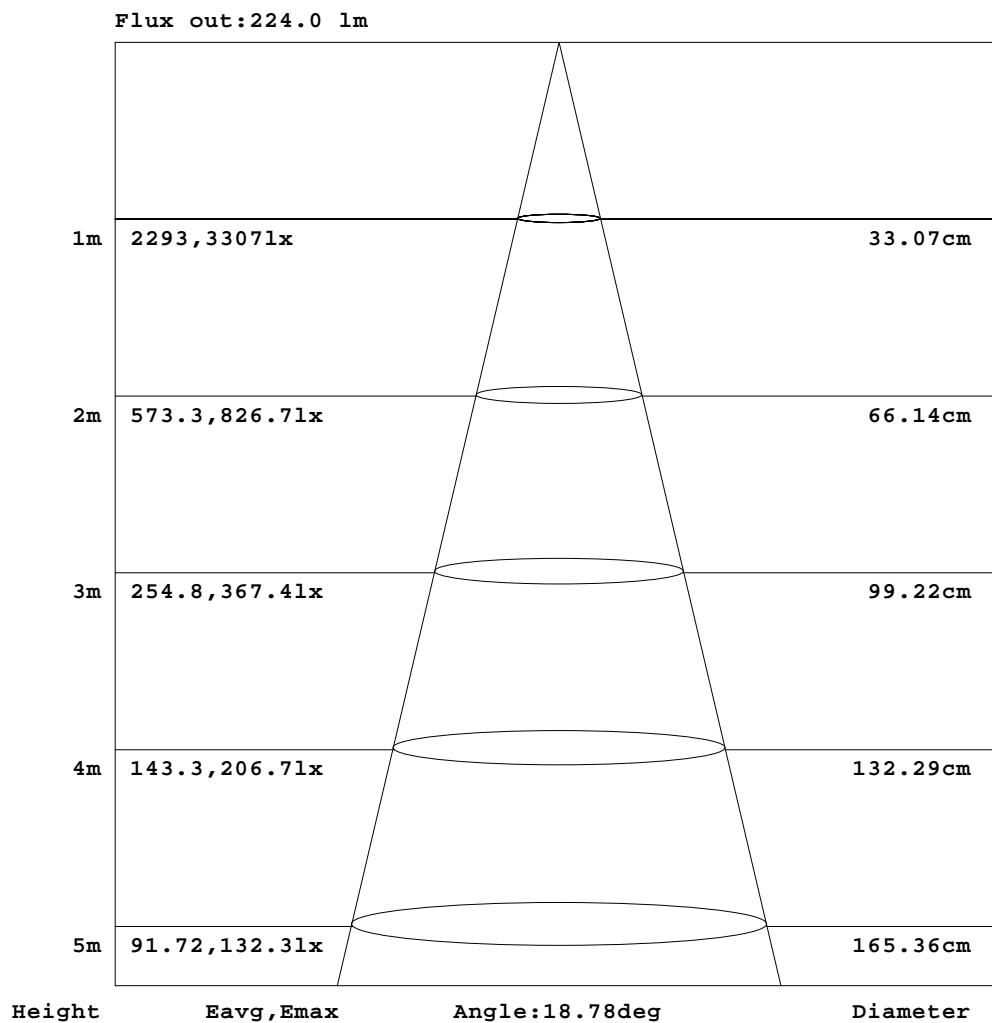


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-6-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:220.16V I:0.0375A P:7.5779W PF:0.9130 Freq:49.99Hz Lamp Flux:663.4x1 lm		
NAME: 2318.203-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2306030723
MFR.: RISE	SUR.: 0.000572265m2	Shielding Angle:

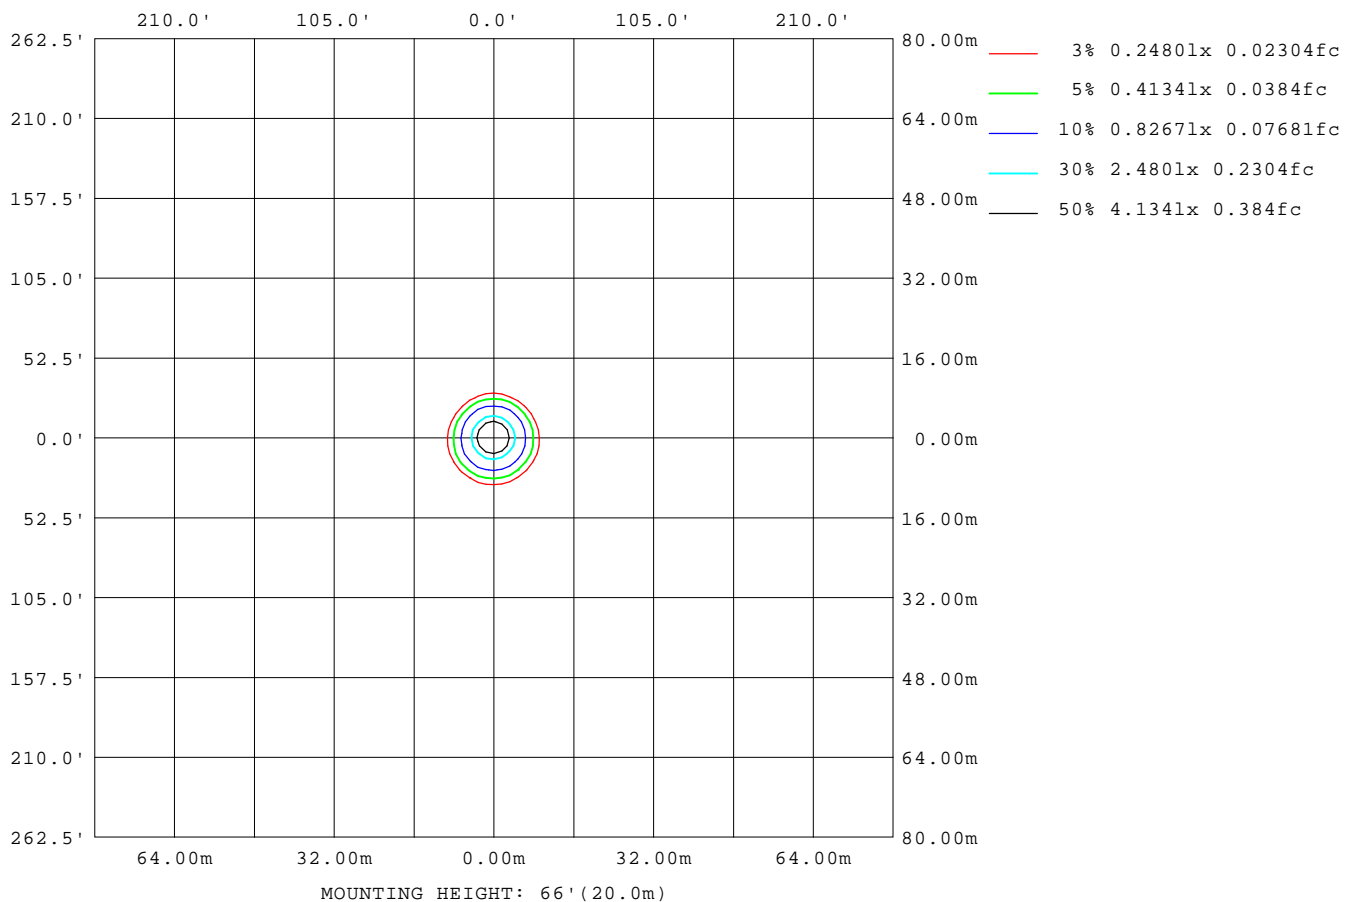

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3°C  
Operators:zoe  
Test Date:2023-6-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up

## LED Avg.L Report

Test:U:220.16V I:0.0375A P:7.5779W PF:0.9130 Freq:49.99Hz Lamp Flux:663.4x1 lm		
NAME: 2318.203-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2306030723
MFR.: RISE	SUR.: 0.000572265m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	11314
L_0~180(75)av	5738
L_0~180(85)av	1140
L_90~270(65)av	11302
L_90~270(75)av	5732
L_90~270(85)av	1078
L_45(65)av	11297
L_45(75)av	5722
L_45(85)av	969

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-6-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up

## Planar Illuminance Curve

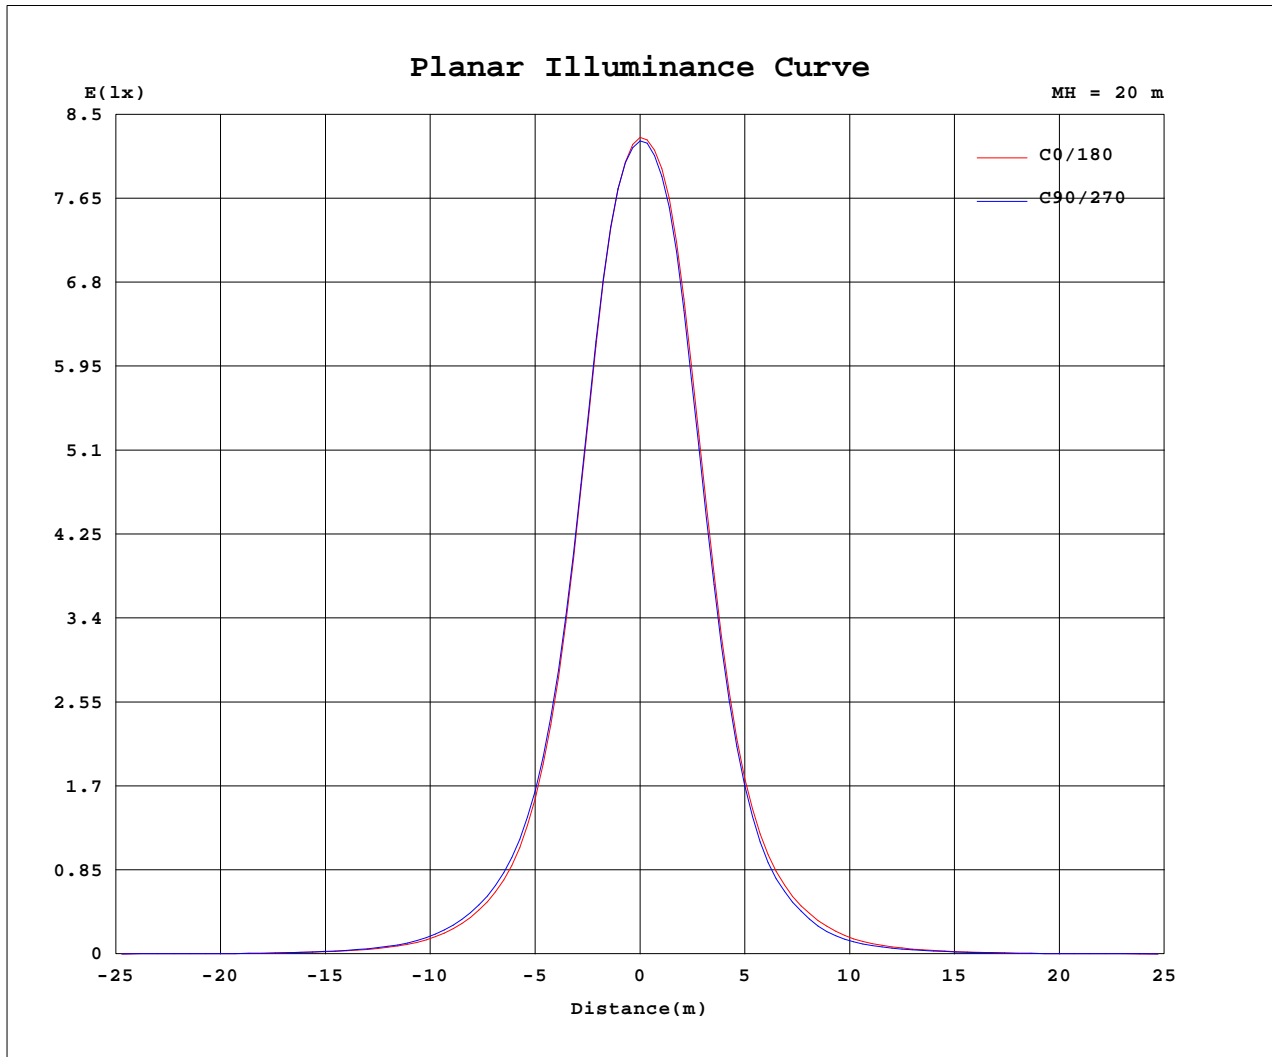

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: MEDIUM  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2023-6-3

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: CXB1304-0000-000F0UA430G Ra:90  
 LENS: PM-1084 15R  
 DRIVER: KEDH009S0350NR12A1 350mA  
 30minutes warm-up

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.16V I:0.0375A P:7.5779W PF:0.9130 Freq:49.99Hz Lamp Flux:663.4x1 lm		
NAME: 2318.203-ACOT-96	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2306030723
MFR.: RISE	SUR.: 0.000572265m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	3297	3297	3297	3297	3297	3297	3297	3297	3297	3297	3297	3297						
5	2749	2735	2726	2770	2837	2901	2906	2910	2922	2879	2816	2757						
10	1401	1392	1381	1435	1501	1584	1608	1615	1630	1568	1498	1421						
15	578	582	589	616	645	667	651	638	639	619	598	575						
20	254	264	272	284	294	299	282	265	260	254	251	247						
25	114	123	126	131	134	135	124	112	106	100	100	104						
30	50.6	54.3	56.0	57.5	58.6	58.4	53.8	49.8	46.7	44.2	44.2	46.1						
35	25.0	26.5	27.4	28.1	28.8	28.8	26.4	24.4	23.3	22.7	22.9	23.5						
40	12.3	12.7	12.7	12.8	13.1	13.2	12.3	11.8	11.6	11.6	11.7	11.7						
45	6.33	6.35	6.34	6.37	6.29	6.23	5.94	5.92	6.00	6.07	6.17	6.23						
50	5.15	5.20	5.19	5.17	5.12	5.04	4.84	4.81	4.89	4.99	5.02	5.11						
55	4.54	4.56	4.54	4.53	4.50	4.40	4.28	4.25	4.28	4.38	4.41	4.47						
60	3.87	3.90	3.87	3.86	3.84	3.79	3.71	3.68	3.69	3.74	3.78	3.82						
65	2.71	2.72	2.71	2.73	2.76	2.78	2.76	2.75	2.75	2.74	2.70	2.68						
70	1.60	1.59	1.58	1.60	1.64	1.69	1.71	1.73	1.73	1.71	1.66	1.61						
75	0.80	0.78	0.77	0.80	0.83	0.88	0.90	0.91	0.92	0.90	0.86	0.82						
80	0.30	0.29	0.29	0.31	0.33	0.35	0.37	0.37	0.37	0.36	0.33	0.30						
85	0.05	0.04	0.04	0.05	0.05	0.06	0.07	0.06	0.06	0.06	0.04	0.04						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: MEDIUM  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-6-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CXB1304-0000-000F0UA430G Ra:90  
LENS: PM-1084 15R  
DRIVER: KEDH009S0350NR12A1 350mA  
30minutes warm-up