

## Luminaire Photograph



Light Output Ratio:	89.6%	
Luminaire Power:	11.75 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.60	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2024-4-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-40G10TH-A-83 Ra:90  
LENS: PM-0132B 36R  
DRIVER: SC42W300-1050CG-4W 300mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

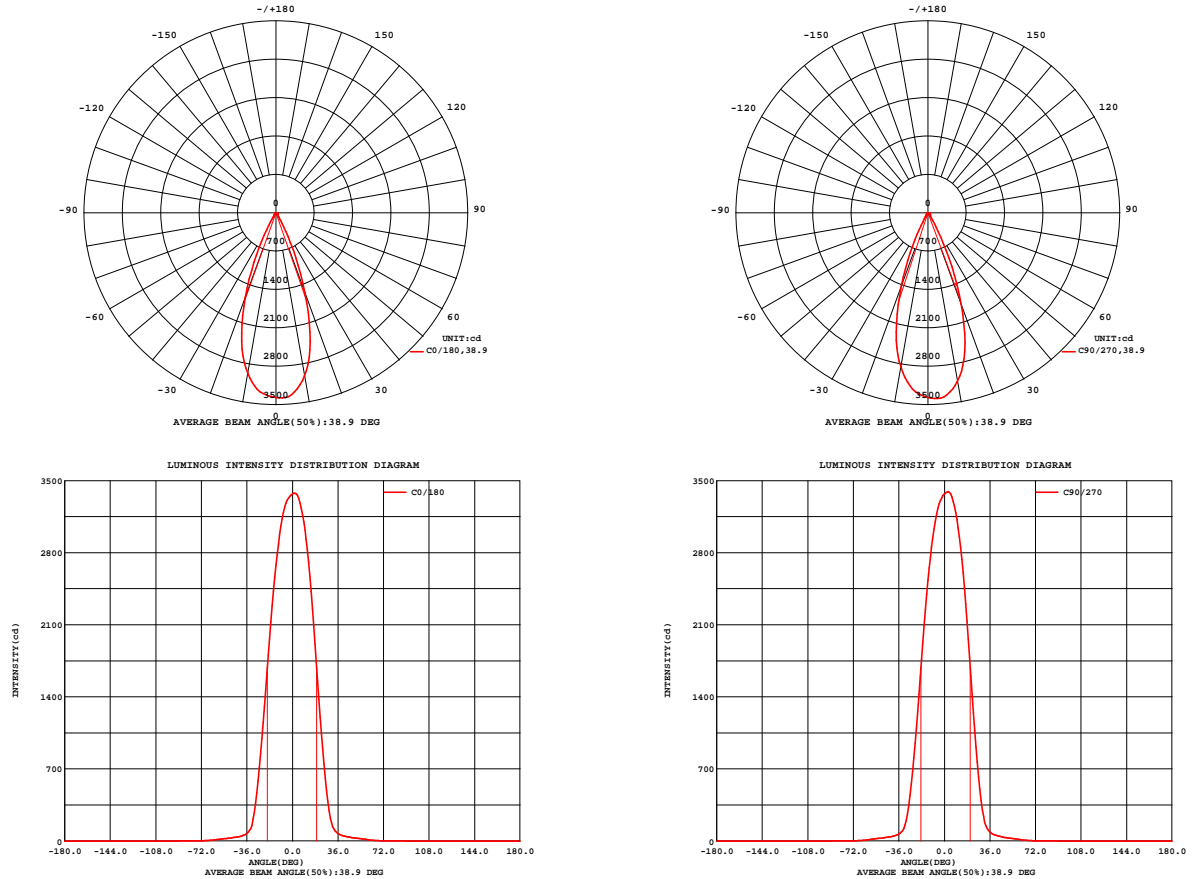


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2024-4-3

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-40G10TH-A-83 Ra: 90  
LENS: PM-0132B 36R  
DRIVER: SC42W300-1050CG-4W 300mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.21V I:0.0616A P:11.751W PF:0.8609 Freq:49.99Hz Lamp Flux:1608.69x1 lm		
NAME: 2319.209-UA-300-HE	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 2404030255
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 122.66 lm/W			
MODEL	Brideglux	I <sub>max</sub> (cd)	3395	S/MH(C0/180)	0.61
NOMINAL POWER(W)	12	LOR(%)	89.6	S/MH(C90/270)	0.58
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1441.5	η UP,DN(C0-180)	0.0,47.1
NOMINAL FLUX(lm)	1608.69	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,42.5
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down(%)	89.6	CIBSE SHR MAX	0.60

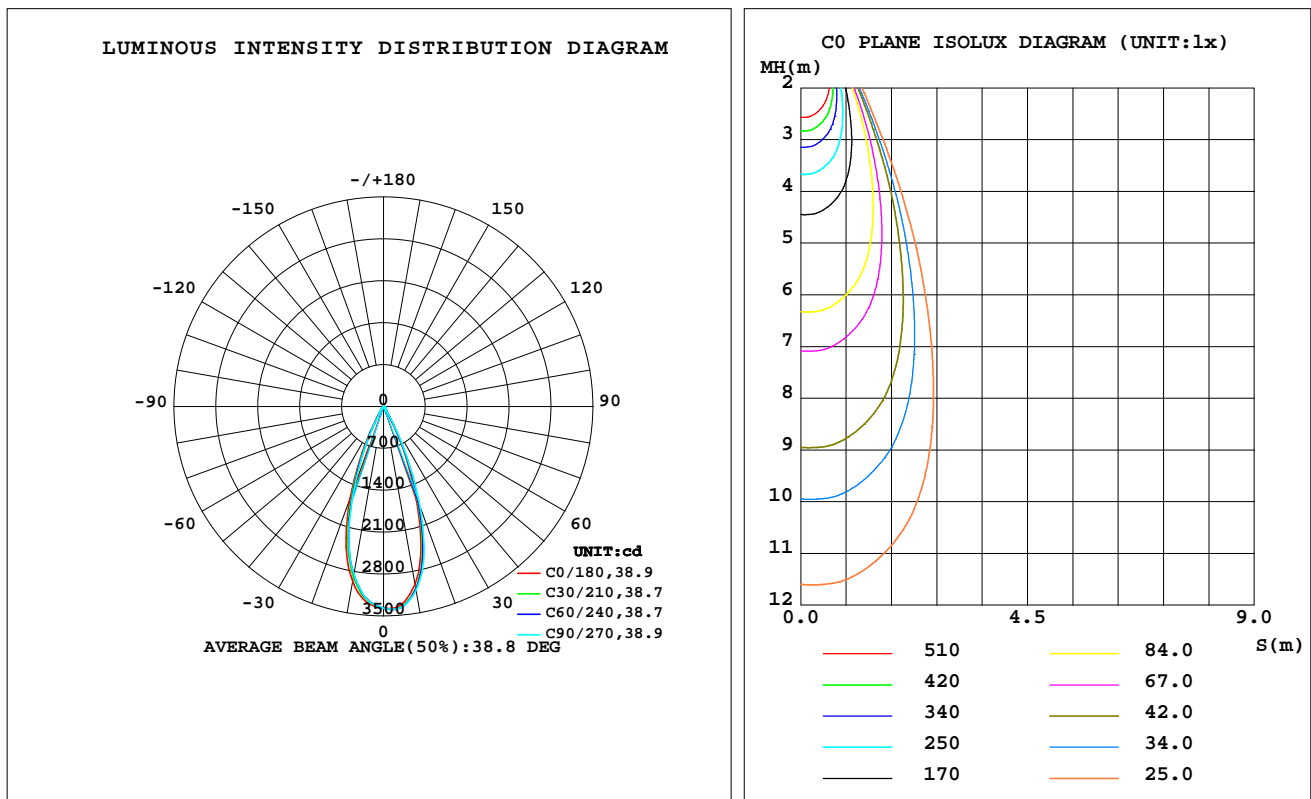

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-4-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-40G10TH-A-83 Ra:90  
LENS:PM-0132B 36R  
DRIVER:SC42W300-1050CG-4W 300mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	3020	3096	3120	3065	2972	2876	2854	2907	0- 10	304.9	304.9	21.2,19
20	1550	1684	1785	1740	1640	1494	1421	1429	10- 20	650.6	955.6	66.3,59.4
30	222.9	257.4	302.5	300.2	270.3	231.4	197.8	195.2	20- 30	366.3	1322	91.7,82.2
40	51.01	55.27	58.64	54.51	49.25	48.94	47.95	47.97	30- 40	64.03	1386	96.1,86.1
50	28.31	29.85	30.67	29.10	27.57	27.91	27.96	27.76	40- 50	29.43	1415	98.2,88
60	11.61	12.45	13.41	13.30	12.54	12.09	11.87	11.64	50- 60	18.90	1434	99.5,89.2
70	2.141	2.440	2.774	2.903	2.583	2.422	2.285	2.311	60- 70	6.586	1441	100,89.6
80	0.0388	0.0272	0.0400	0.0310	0.0348	0.0241	0.0323	0.0197	70- 80	0.6899	1441	100,89.6
90	0	0	0	0	0	0	0	0	80- 90	0.0204	1441	100,89.6
100	0	0	0	0	0	0	0	0	90-100	0	1441	100,89.6
110	0	0	0	0	0	0	0	0	100-110	0	1441	100,89.6
120	0	0	0	0	0	0	0	0	110-120	0	1441	100,89.6
130	0	0	0	0	0	0	0	0	120-130	0	1441	100,89.6
140	0	0	0	0	0	0	0	0	130-140	0	1441	100,89.6
150	0	0	0	0	0	0	0	0	140-150	0	1441	100,89.6
160	0	0	0	0	0	0	0	0	150-160	0	1441	100,89.6
170	0	0	0	0	0	0	0	0	160-170	0	1441	100,89.6
180	0	0	0	0	0	0	0	0	170-180	0	1441	100,89.6
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-4-3

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-40G10TH-A-83 Ra:90  
LENS:PM-0132B 36R  
DRIVER:SC42W300-1050CG-4W 300mA  
30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:220.21V I:0.0616A P:11.751W PF:0.8609 Freq:49.99Hz  
Lamp Flux:1608.69x1 lm

NAME: 2319.209-UA-300-HE

TYPE:

WEIGHT:

SPEC.: 4000K


DIM.:

SERIAL No.: 2404030255

MFR.: RISE

SUR.: 0.002826m2

Shielding Angle:

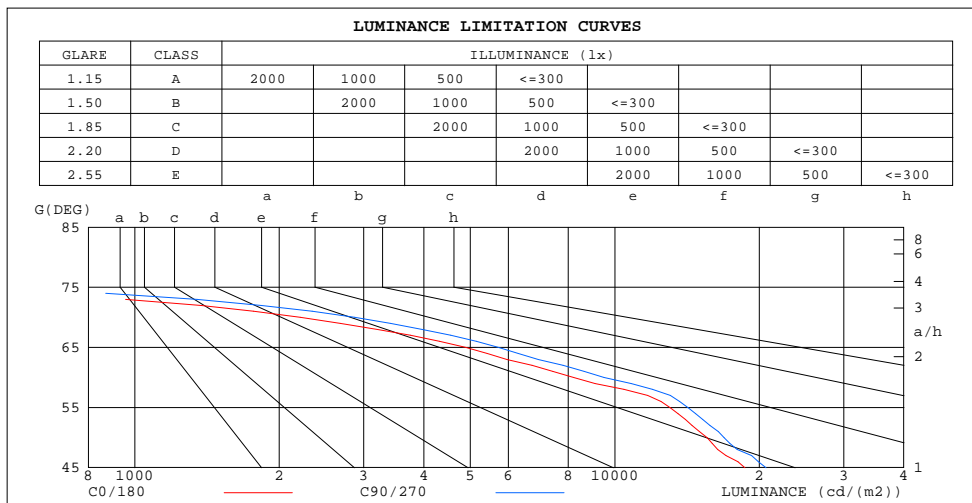

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-4-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-40G10TH-A-83 Ra:90  
LENS:PM-0132B 36R  
DRIVER:SC42W300-1050CG-4W 300mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.21V I:0.0616A P:11.751W PF:0.8609 Freq:49.99Hz  
Lamp Flux:1608.69x1 lm

NAME: 2319.209-UA-300-HE

TYPE:

WEIGHT:

SPEC.: 4000K

DIM.:


SERIAL No.: 2404030255

MFR.: RISE

SUR.: 0.002826m2

Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.07	1.07	1.07	1.04	1.04	1.04	.00	.00	.00	.95	.95	.95	.91	.91	.91	.90
1.0	1.00	.99	.97	.99	.97	.95	.95	.94	.92	.92	.91	.90	.89	.88	.87	.85
2.0	.95	.92	.89	.93	.91	.88	.91	.88	.86	.88	.86	.85	.86	.84	.83	.81
3.0	.90	.86	.83	.89	.85	.83	.87	.84	.81	.84	.82	.80	.82	.81	.79	.78
4.0	.86	.82	.78	.85	.81	.78	.83	.80	.77	.81	.78	.76	.80	.77	.75	.74
5.0	.82	.77	.74	.81	.77	.74	.79	.76	.73	.78	.75	.73	.77	.74	.72	.71
6.0	.78	.74	.71	.77	.73	.70	.76	.73	.70	.75	.72	.69	.74	.71	.69	.68
7.0	.75	.70	.67	.74	.70	.67	.73	.70	.67	.72	.69	.67	.71	.68	.66	.65
8.0	.72	.67	.65	.71	.67	.64	.70	.67	.64	.70	.66	.64	.69	.66	.64	.63
9.0	.69	.65	.62	.69	.65	.62	.68	.64	.62	.67	.64	.61	.66	.63	.61	.60
10.0	.66	.62	.59	.66	.62	.59	.65	.62	.59	.65	.61	.59	.64	.61	.59	.58

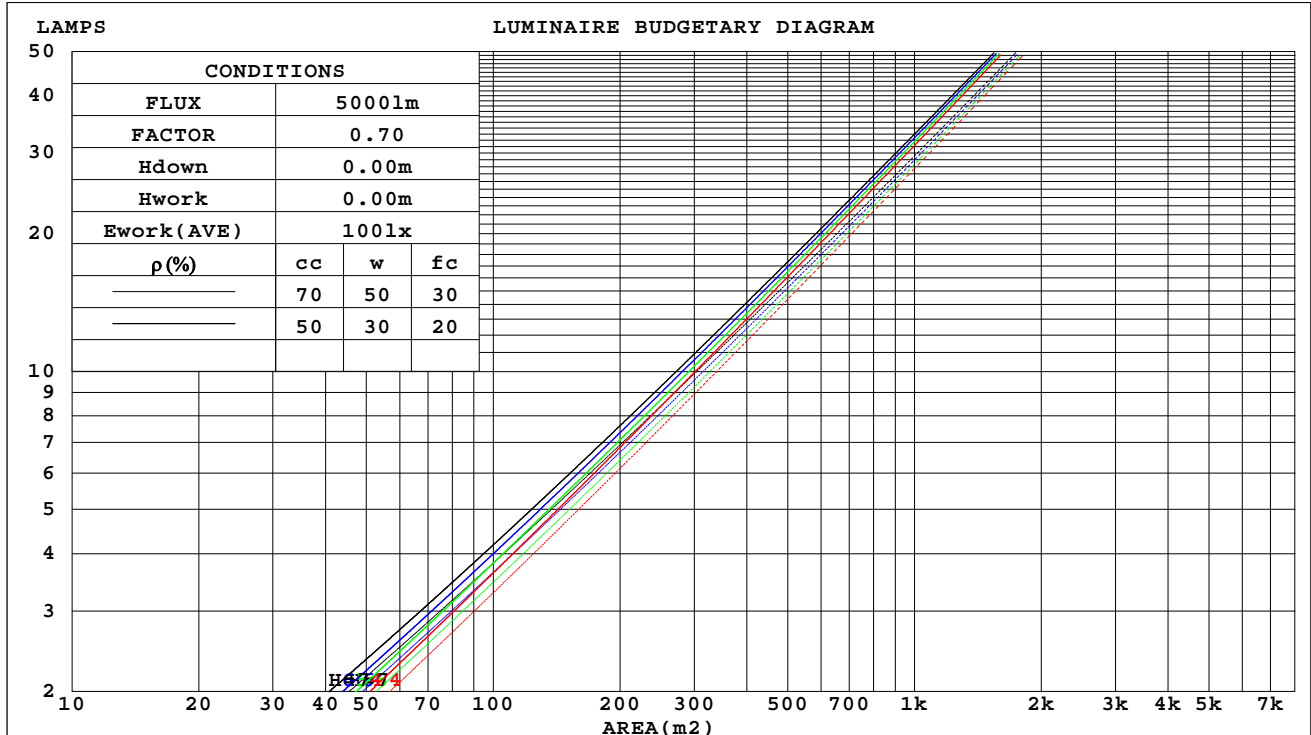

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-4-3

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-40G10TH-A-83 Ra:90  
LENS:PM-0132B 36R  
DRIVER:SC42W300-1050CG-4W 300mA  
30minutes warm-up

### WEC AND CCEC

Test:U:220.21V I:0.0616A P:11.751W PF:0.8609 Freq:49.99Hz Lamp Flux:1608.69x1 lm		
NAME: 2319.209-UA-300-HE	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 2404030255
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.137	.078	.025	.131	.075	.024	.120	.069	.022	.109	.063	.020	.100	.058	.019	
2.0	.129	.071	.022	.124	.068	.021	.114	.064	.020	.106	.059	.019	.098	.055	.017	
3.0	.121	.064	.019	.117	.063	.019	.109	.059	.018	.102	.056	.017	.095	.053	.016	
4.0	.114	.059	.017	.111	.058	.017	.104	.055	.016	.098	.053	.016	.092	.050	.015	
5.0	.108	.055	.016	.105	.054	.016	.100	.052	.015	.094	.050	.015	.089	.048	.014	
6.0	.103	.052	.015	.100	.051	.015	.095	.049	.014	.091	.047	.014	.086	.045	.014	
7.0	.098	.049	.014	.096	.048	.014	.092	.046	.013	.087	.045	.013	.084	.043	.013	
8.0	.094	.046	.013	.092	.045	.013	.088	.044	.013	.084	.043	.012	.081	.042	.012	
9.0	.090	.043	.012	.088	.043	.012	.085	.042	.012	.081	.041	.012	.078	.040	.012	
10.0	.086	.041	.011	.085	.041	.011	.082	.040	.011	.079	.039	.011	.076	.038	.011	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.171	.171	.171	.146	.146	.146	.100	.100	.100	.057	.057	.057	.018	.018	.018		
1.0	.152	.141	.132	.130	.121	.113	.089	.083	.078	.051	.048	.046	.016	.016	.015		
2.0	.137	.119	.104	.117	.102	.090	.080	.071	.063	.046	.041	.037	.015	.013	.012		
3.0	.124	.102	.084	.106	.088	.073	.073	.061	.051	.042	.036	.030	.014	.012	.010		
4.0	.114	.088	.068	.098	.076	.059	.067	.053	.042	.039	.031	.025	.012	.010	.008		
5.0	.105	.077	.057	.090	.067	.049	.062	.047	.035	.036	.027	.021	.012	.009	.007		
6.0	.098	.069	.048	.084	.059	.042	.058	.042	.029	.034	.024	.018	.011	.008	.006		
7.0	.091	.061	.041	.078	.053	.035	.054	.037	.025	.031	.022	.015	.010	.007	.005		
8.0	.086	.056	.035	.074	.048	.030	.051	.034	.022	.030	.020	.013	.010	.007	.004		
9.0	.081	.051	.030	.070	.044	.026	.048	.031	.019	.028	.018	.011	.009	.006	.004		
10.0	.077	.047	.027	.066	.040	.023	.046	.028	.017	.027	.017	.010	.009	.006	.003		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-4-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-40G10TH-A-83 Ra:90  
LENS:PM-0132B 36R  
DRIVER:SC42W300-1050CG-4W 300mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:220.21V I:0.0616A P:11.751W PF:0.8609 Freq:49.99Hz Lamp Flux:1608.69x1 lm										
NAME: 2319.209-UA-300-HE					TYPE:			WEIGHT:		
SPEC.: 4000K					DIM.:			SERIAL No.: 2404030255		
MFR.: RISE					SUR.: 0.002826m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.4	13.2	12.6	13.3	13.5	13.0	13.8	13.2	14.0	14.1
3H	12.4	13.1	12.6	13.3	13.5	13.0	13.7	13.3	13.9	14.1
4H	12.3	13.0	12.6	13.2	13.4	13.0	13.6	13.2	13.8	14.1
6H	12.2	12.8	12.5	13.1	13.3	12.9	13.5	13.2	13.7	14.0
8H	12.2	12.8	12.5	13.0	13.3	12.8	13.4	13.1	13.7	13.9
12H	12.1	12.7	12.4	13.0	13.2	12.8	13.4	13.1	13.6	13.9
4H 2H	12.4	13.1	12.7	13.3	13.5	13.0	13.7	13.3	13.9	14.1
3H	12.4	13.0	12.7	13.3	13.5	13.0	13.6	13.3	13.9	14.1
4H	12.3	12.9	12.7	13.2	13.5	12.9	13.5	13.3	13.8	14.1
6H	12.2	12.7	12.6	13.0	13.4	12.8	13.3	13.2	13.6	14.0
8H	12.2	12.6	12.6	13.0	13.3	12.8	13.2	13.2	13.6	13.9
12H	12.1	12.5	12.5	12.9	13.3	12.7	13.1	13.1	13.5	13.9
8H 4H	12.2	12.6	12.6	13.0	13.3	12.8	13.2	13.2	13.6	13.9
6H	12.1	12.4	12.5	12.8	13.2	12.7	13.0	13.1	13.4	13.8
8H	12.0	12.3	12.5	12.8	13.2	12.6	12.9	13.1	13.4	13.8
12H	12.0	12.2	12.4	12.7	13.1	12.6	12.8	13.0	13.3	13.7
12H 4H	12.1	12.5	12.5	12.9	13.3	12.7	13.1	13.1	13.5	13.9
6H	12.0	12.3	12.5	12.8	13.2	12.6	12.9	13.1	13.4	13.8
8H	12.0	12.2	12.4	12.7	13.1	12.6	12.8	13.0	13.3	13.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.2 / - 1.8					+ 1.4 / - 1.7				
1.5H	+ 1.2 / - 0.9					+ 1.8 / - 1.2				
2.0H	+ 2.1 / - 3.9					+ 2.1 / - 3.9				

CIE Pub.117, 1609 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.7)  
Area: 0.002826 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-4-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-40G10TH-A-83 Ra:90  
LENS:PM-0132B 36R  
DRIVER:SC42W300-1050CG-4W 300mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:220.21V I:0.0616A P:11.751W PF:0.8609 Freq:49.99Hz Lamp Flux:1608.69x1 lm		
NAME: 2319.209-UA-300-HE	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 2404030255
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	80	74	71	79	74	71	79	74	71	68
0.80	86	81	78	86	81	78	85	81	78	75
1.00	90	85	82	89	85	82	88	85	81	78
1.25	93	89	86	92	88	86	91	87	85	81
1.50	96	92	89	95	91	88	93	90	87	84
2.00	98	94	92	97	93	91	94	92	90	85
2.50	99	96	93	98	95	93	95	93	91	86
3.00	101	98	95	99	96	94	96	94	92	87
4.00	102	100	98	100	99	97	97	96	94	88
5.00	103	101	100	102	100	99	98	97	96	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-4-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-40G10TH-A-83 Ra:90  
LENS:PM-0132B 36R  
DRIVER:SC42W300-1050CG-4W 300mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:220.21V I:0.0616A P:11.751W PF:0.8609 Freq:49.99Hz Lamp Flux:1608.69x1 lm		
NAME: 2319.209-UA-300-HE	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 2404030255
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

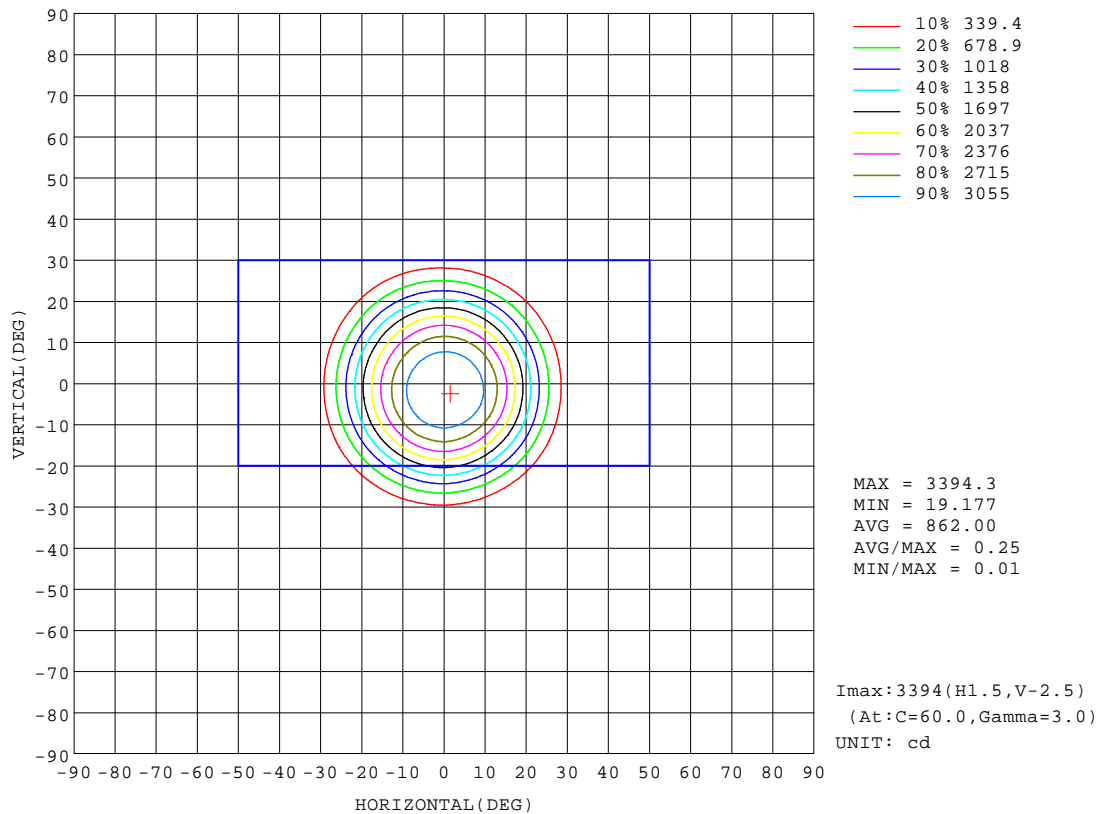


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:zoe  
 Test Date:2024-4-3

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:3.160m [K=1.0000]  
 Remarks: LAMP:BXRE-40G10TH-A-83 Ra:90  
 LENS:PM-0132B 36R  
 DRIVER:SC42W300-1050CG-4W 300mA  
 30minutes warm-up

## AAI Figure

Test:U:220.21V I:0.0616A P:11.751W PF:0.8609 Freq:49.99Hz Lamp Flux:1608.69x1 lm		
NAME: 2319.209-UA-300-HE	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 2404030255
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

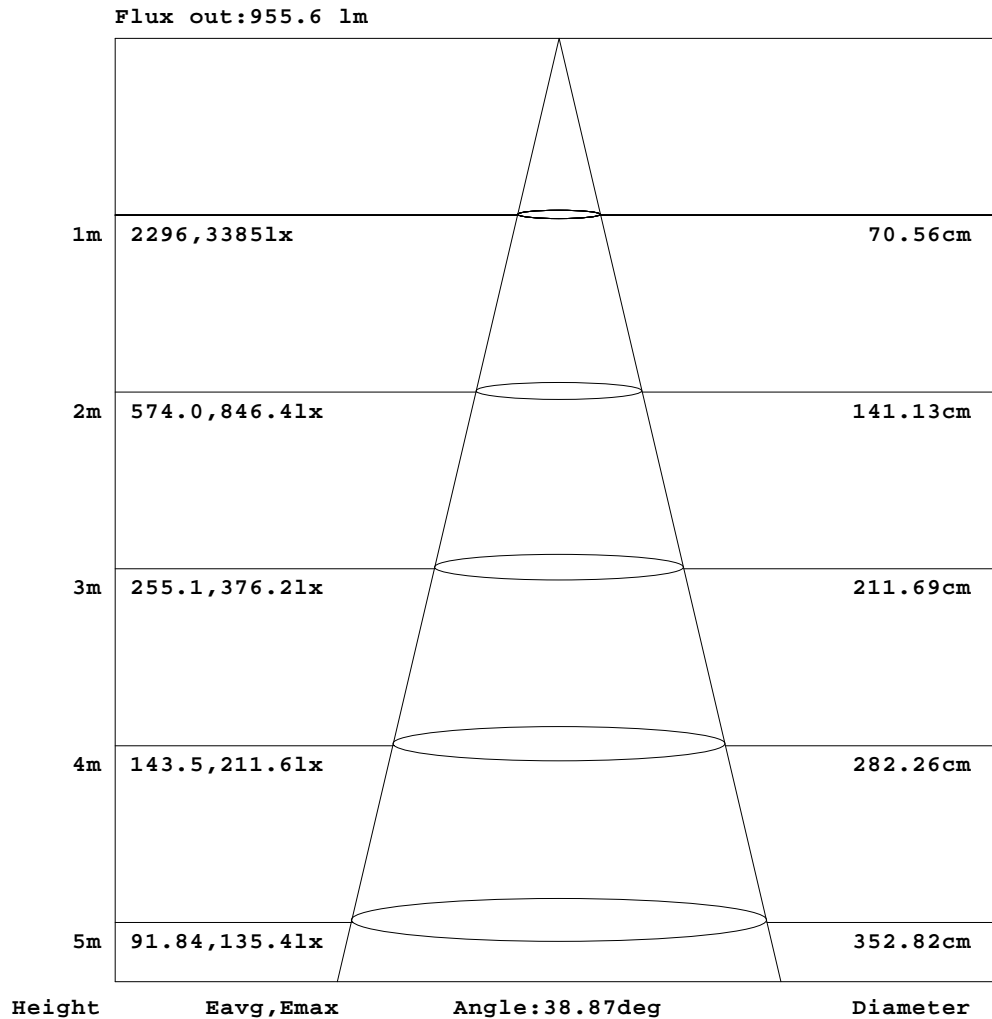


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-4-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-40G10TH-A-83 Ra:90  
LENS:PM-0132B 36R  
DRIVER:SC42W300-1050CG-4W 300mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:220.21V I:0.0616A P:11.751W PF:0.8609 Freq:49.99Hz Lamp Flux:1608.69x1 lm		
NAME: 2319.209-UA-300-HE	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 2404030255
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

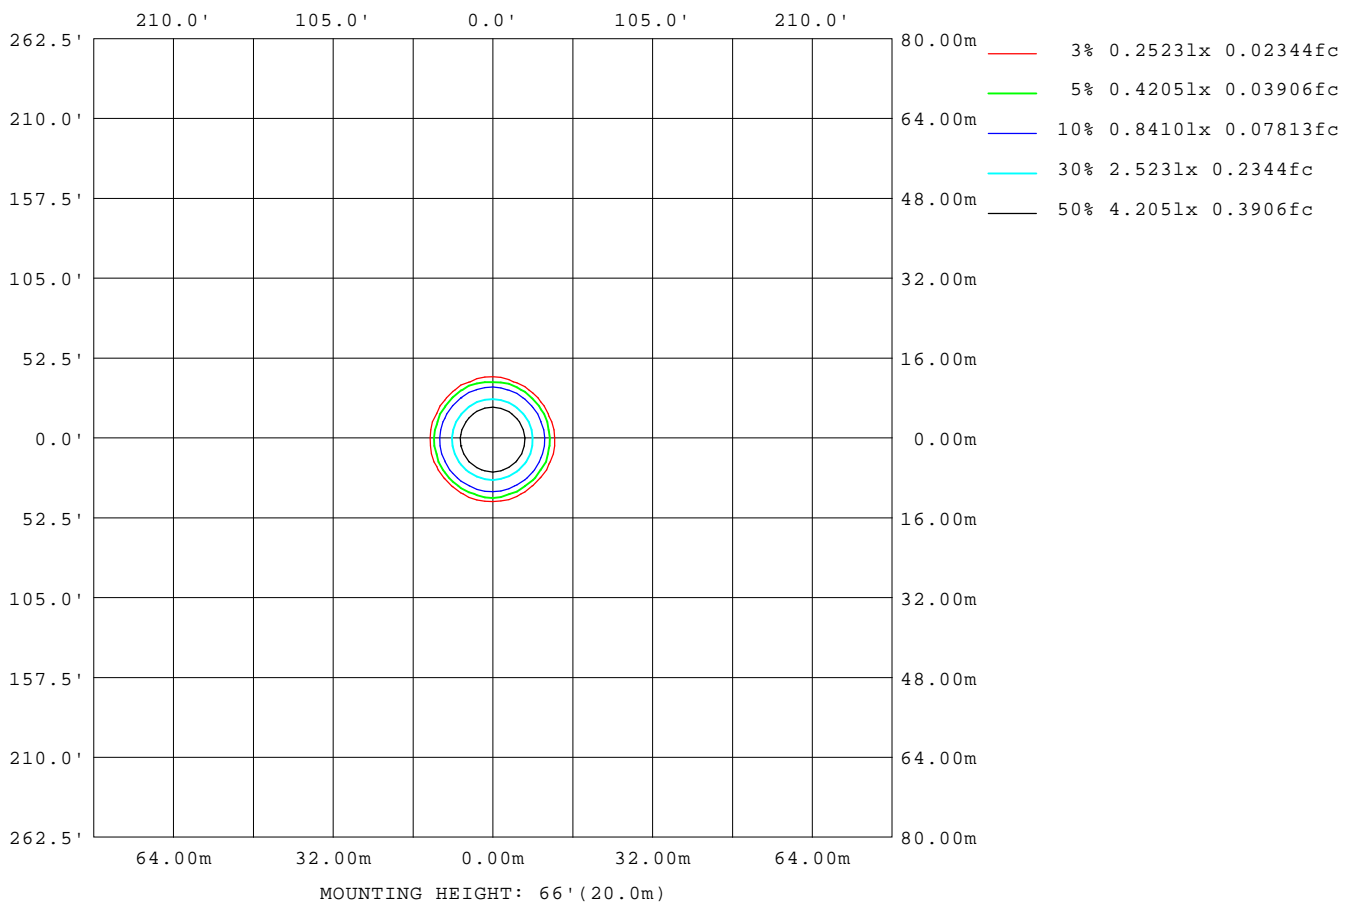

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-4-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-40G10TH-A-83 Ra:90  
LENS:PM-0132B 36R  
DRIVER:SC42W300-1050CG-4W 300mA  
30minutes warm-up

### LED Avg.L Report

Test:U:220.21V I:0.0616A P:11.751W PF:0.8609 Freq:49.99Hz Lamp Flux:1608.69x1 lm		
NAME: 2319.209-UA-300-HE	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 2404030255
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	5197
L_0~180(75)av	331
L_0~180(85)av	115
L_90~270(65)av	5404
L_90~270(75)av	318
L_90~270(85)av	111
L_45(65)av	5339
L_45(75)av	299
L_45(85)av	52

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-4-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-40G10TH-A-83 Ra:90  
LENS:PM-0132B 36R  
DRIVER:SC42W300-1050CG-4W 300mA  
30minutes warm-up

## Planar Illuminance Curve

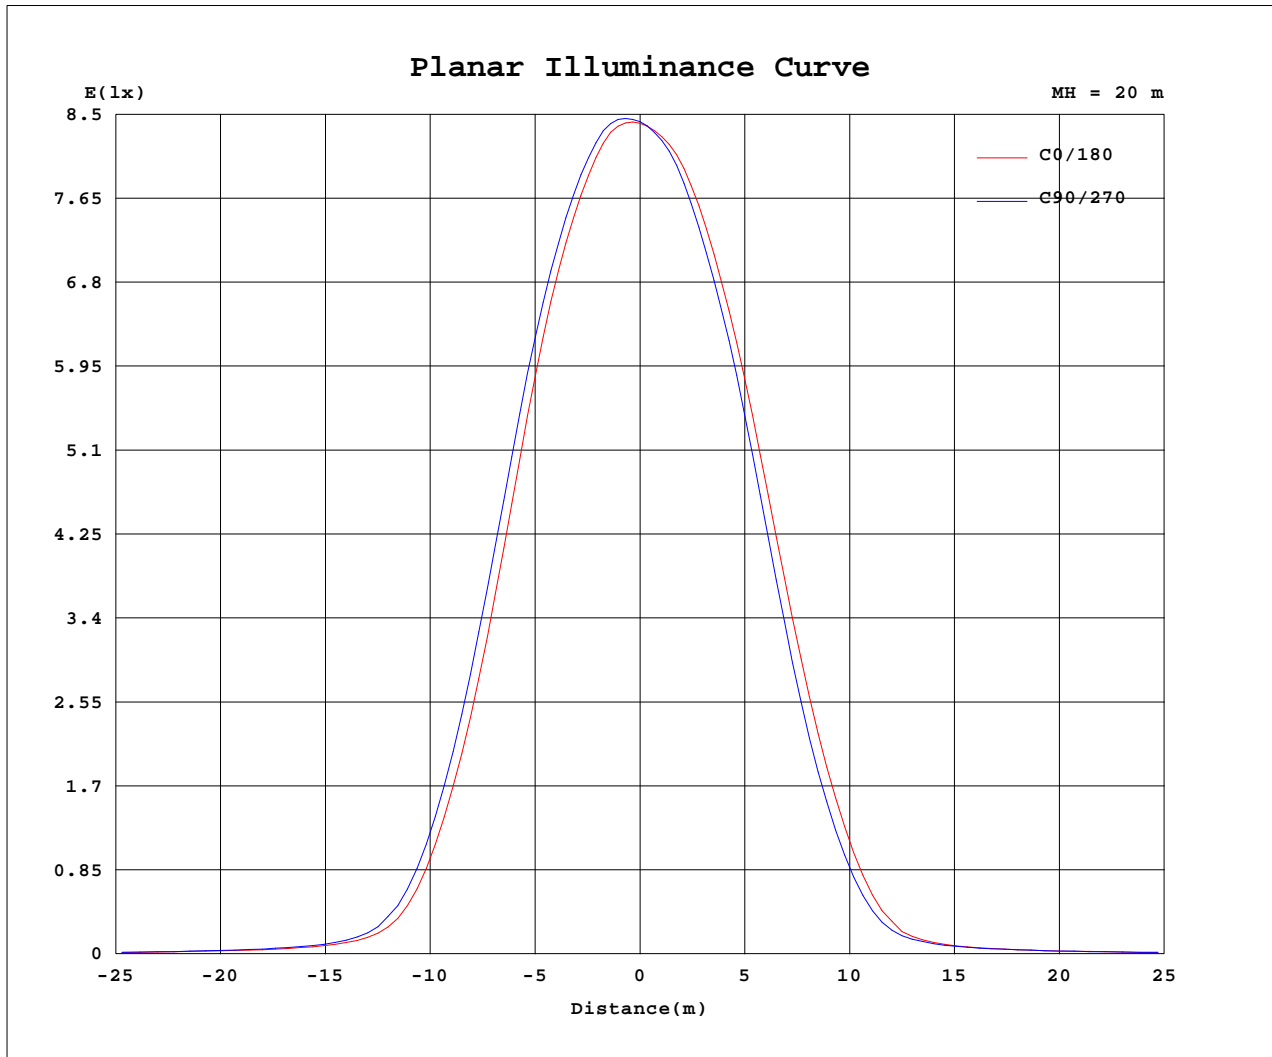

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2024-4-3

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRE-40G10TH-A-83 Ra: 90  
 LENS: PM-0132B 36R  
 DRIVER: SC42W300-1050CG-4W 300mA  
 30minutes warm-up



## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.21V I:0.0616A P:11.751W PF:0.8609 Freq:49.99Hz Lamp Flux:1608.69x1 lm		
NAME: 2319.209-UA-300-HE	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.: 2404030255
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	3369	3369	3369	3369	3369	3369	3369	3369	3369	3369	3369	3369						
5	3327	3365	3374	3371	3350	3319	3280	3245	3229	3230	3255	3285						
10	3020	3086	3105	3120	3093	3037	2972	2896	2856	2854	2878	2936						
15	2422	2517	2556	2608	2582	2512	2426	2318	2263	2247	2253	2306						
20	1550	1657	1710	1785	1762	1717	1640	1522	1466	1421	1415	1443						
25	746	826	865	917	910	894	851	763	718	674	661	679						
30	223	250	264	303	302	298	270	230	232	198	196	195						
35	86.0	90.4	93.3	103	99.7	92.1	85.5	82.0	78.7	76.7	75.2	74.5						
40	51.0	54.5	56.0	58.6	56.1	53.0	49.3	49.0	48.9	47.9	48.4	47.6						
45	37.3	38.7	40.2	41.2	40.2	37.2	36.0	36.4	36.7	36.6	36.3	35.6						
50	28.3	29.4	30.3	30.7	29.7	28.5	27.6	27.5	28.3	28.0	27.9	27.6						
55	21.1	21.9	22.6	23.0	22.5	21.7	21.0	21.1	21.5	21.2	21.2	20.8						
60	11.6	12.2	12.7	13.4	13.5	13.1	12.5	12.1	12.1	11.9	11.8	11.5						
65	5.85	6.08	6.43	6.83	6.97	6.94	6.56	6.29	6.27	6.08	6.08	5.92						
70	2.14	2.27	2.61	2.77	2.89	2.92	2.58	2.37	2.48	2.29	2.34	2.29						
75	0.16	0.16	0.18	0.31	0.38	0.40	0.32	0.21	0.17	0.15	0.13	0.13						
80	0.04	0.03	0.03	0.04	0.03	0.03	0.03	0.02	0.02	0.03	0.02	0.02						
85	0.03	0.01	0.02	0.03	0.02	0.02	0.02	0.02	0.01	0.03	0.01	0.01						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2024-4-3

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-40G10TH-A-83 Ra:90  
LENS:PM-0132B 36R  
DRIVER:SC42W300-1050CG-4W 300mA  
30minutes warm-up