

Luminaire Photograph



Light Output Ratio:	78.0%	
Luminaire Power:	1.221 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.55	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-5-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRE-30G-11H-3A-00-0-0 Ra: 90
LENS: LL01ZZ-DRT 20R
NO DRIVER: DC 24V
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

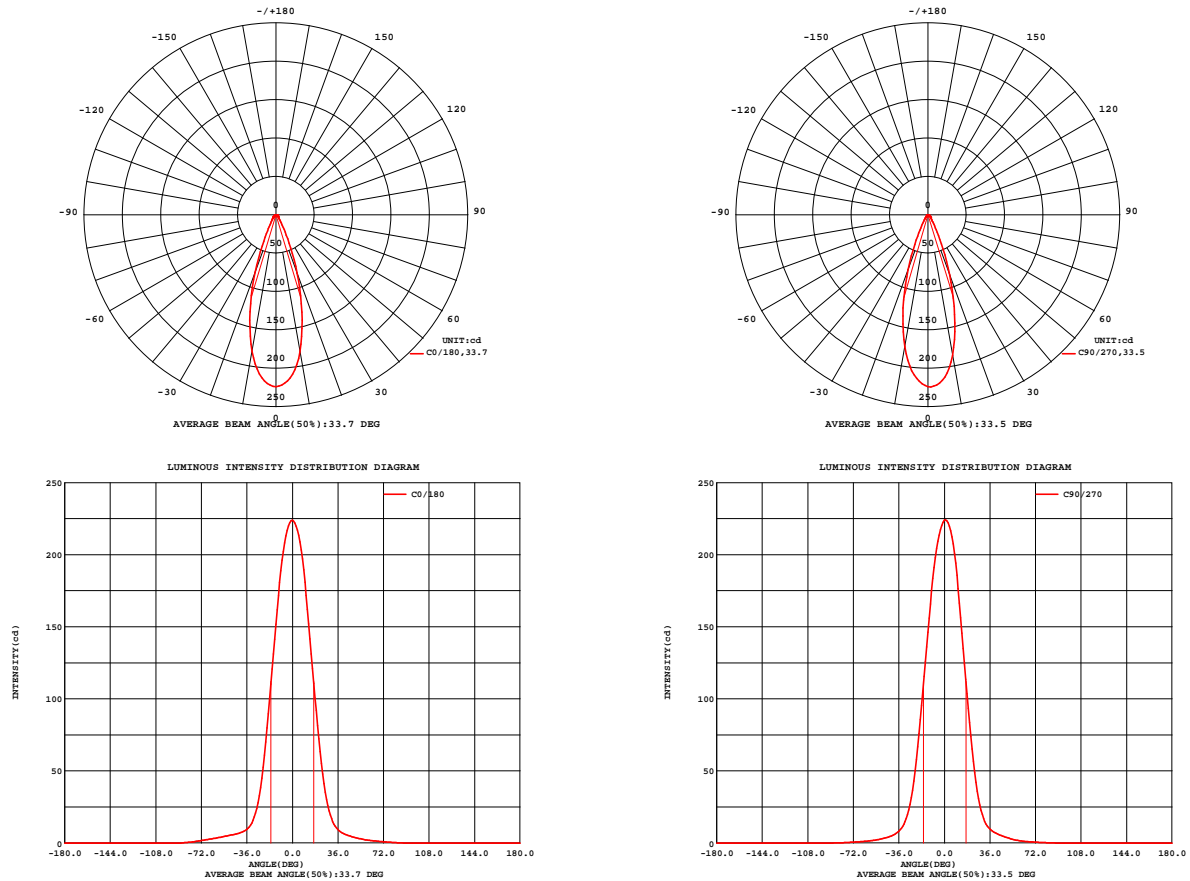


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-5-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRE-30G-11H-3A-00-0-0 Ra: 90
LENS: LL01ZZ-DRT 20R
NO DRIVER: DC 24V
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.948V I:0.0510A P:1.2210W PF:1.0000 Freq:0Hz Lamp Flux:114.769x1 lm		
NAME: 2417.201	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405130535
MFR.: RISE	SUR.: 0.0000785m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 73.32 lm/W			
MODEL	Brideglux	Imax(cd)	224.3	S/MH(C0/180)	0.55
NOMINAL POWER(W)	1	LOR(%)	78.0	S/MH(C90/270)	0.54
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	89.524	η UP,DN(C0-180)	0.0,39.8
NOMINAL FLUX(lm)	114.769	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,38.2
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	24	η down(%)	78.0	CIBSE SHR MAX	0.55

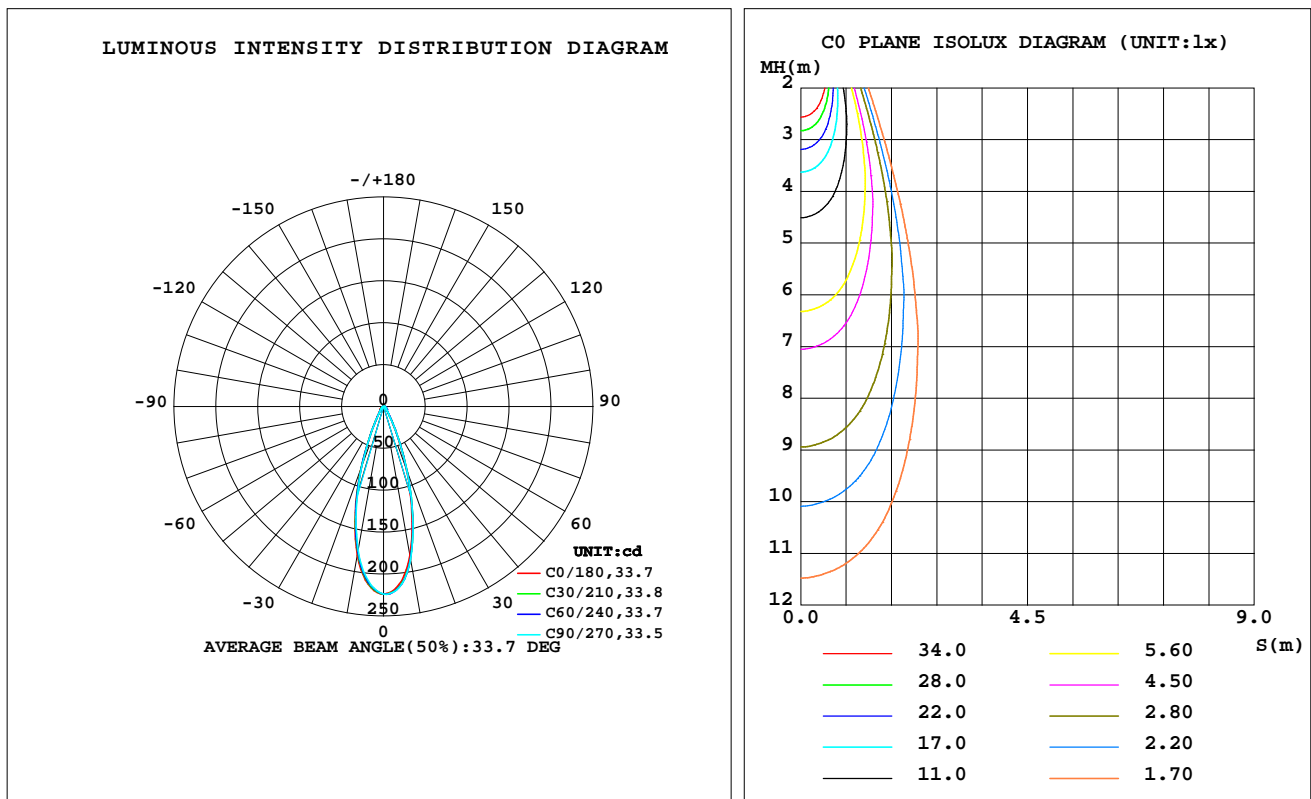

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-DRT 20R
NO DRIVER:DC 24V
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	180.9	185.1	185.8	182.7	180.5	177.4	174.9	177.2	0- 10	19.32	19.32	21.6,16.8
20	81.39	83.44	83.67	81.09	79.72	77.84	75.91	77.95	10- 20	35.49	54.81	61.2,47.8
30	19.39	20.04	19.82	18.81	18.16	17.37	17.04	18.06	20- 30	19.05	73.86	82.5,64.4
40	6.749	7.162	7.149	7.088	7.430	6.462	5.630	6.171	30- 40	6.714	80.57	90,70.2
50	3.715	3.976	3.627	4.012	5.208	3.886	2.798	3.608	40- 50	3.946	84.52	94.4,73.6
60	1.950	1.908	1.494	1.965	3.465	2.287	1.403	2.100	50- 60	2.567	87.08	97.3,75.9
70	1.009	0.9606	0.6677	1.021	1.977	1.259	0.6678	1.168	60- 70	1.534	88.62	99,77.2
80	0.3536	0.3310	0.2376	0.3689	0.6551	0.4385	0.2170	0.4043	70- 80	0.7547	89.37	99.8,77.9
90	0	0	0	0	0	0	0	0	80- 90	0.1530	89.52	100,78
100	0	0	0	0	0	0	0	0	90-100	0	89.52	100,78
110	0	0	0	0	0	0	0	0	100-110	0	89.52	100,78
120	0	0	0	0	0	0	0	0	110-120	0	89.52	100,78
130	0	0	0	0	0	0	0	0	120-130	0	89.52	100,78
140	0	0	0	0	0	0	0	0	130-140	0	89.52	100,78
150	0	0	0	0	0	0	0	0	140-150	0	89.52	100,78
160	0	0	0	0	0	0	0	0	150-160	0	89.52	100,78
170	0	0	0	0	0	0	0	0	160-170	0	89.52	100,78
180	0	0	0	0	0	0	0	0	170-180	0	89.52	100,78
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-DRT 20R
NO DRIVER:DC 24V
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:23.948V I:0.0510A P:1.2210W PF:1.0000 Freq:0Hz
Lamp Flux:114.769x1 lm

NAME: 2417.201

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2405130535

MFR.: RISE

SUR.: 0.0000785m2

Shielding Angle:

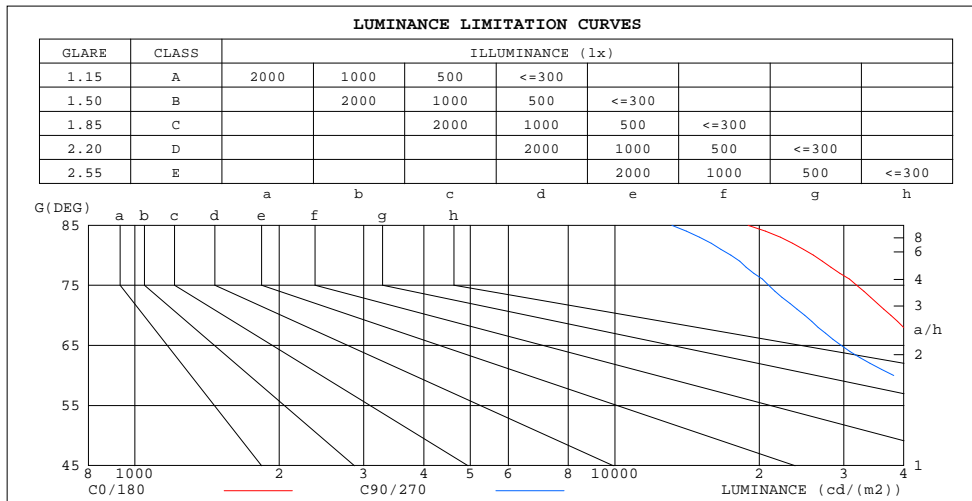

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	18960	13161
80	25938	17437
75	31881	20918
70	37597	24879
65	43383	29644
60	49684	38089
55	60059	52708
50	73638	71902
45	89101	92447

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-13


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-DRT 20R
NO DRIVER:DC 24V
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:23.948V I:0.0510A P:1.2210W PF:1.0000 Freq:0Hz
Lamp Flux:114.769x1 lm

NAME: 2417.201	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405130535
MFR.: RISE	SUR.: 0.0000785m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

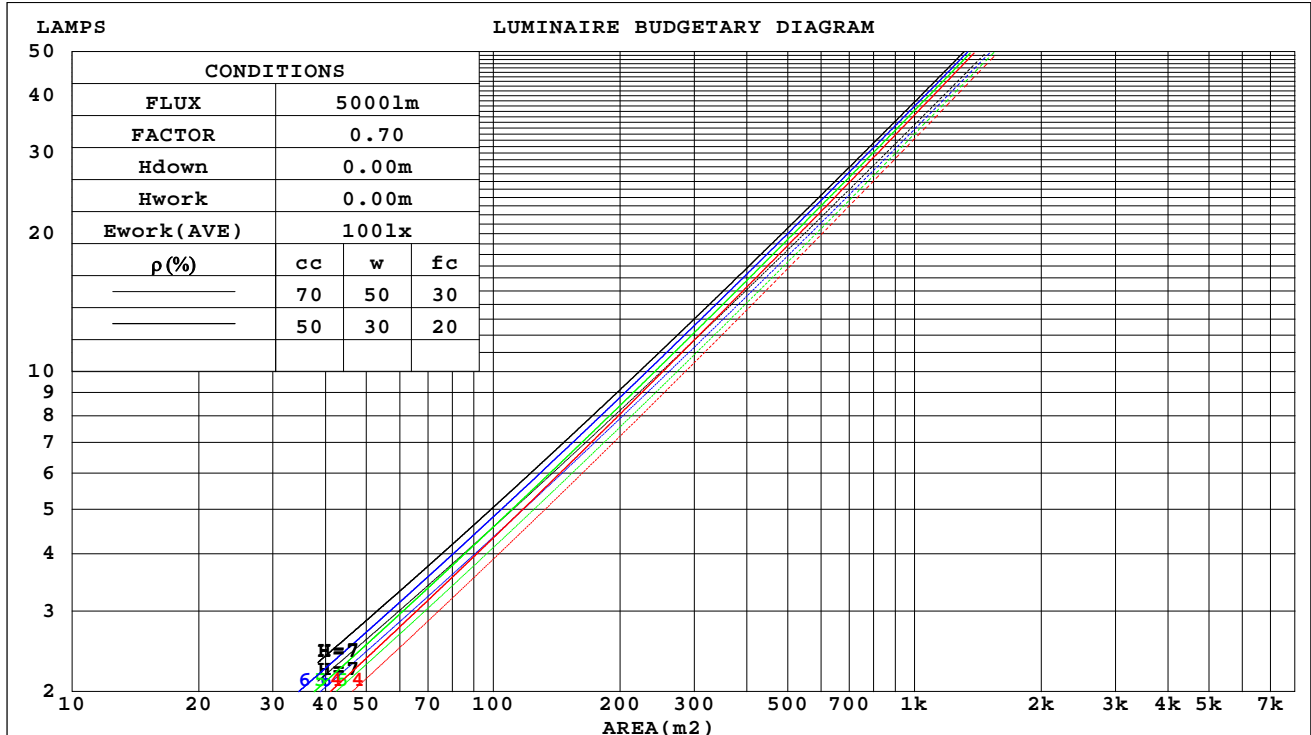

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-DRT 20R
NO DRIVER:DC 24V
30minutes warm-up



WEC AND CCEC

Test:U:23.948V I:0.0510A P:1.2210W PF:1.0000 Freq:0Hz Lamp Flux:114.769x1 lm		
NAME: 2417.201	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405130535
MFR.: RISE	SUR.: 0.0000785m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.132	.075	.024	.127	.072	.023	.117	.067	.021	.108	.062	.020	.100	.058	.019	
2.0	.124	.068	.021	.120	.066	.020	.112	.062	.019	.104	.058	.018	.097	.055	.017	
3.0	.116	.062	.019	.113	.060	.018	.106	.057	.017	.099	.054	.017	.093	.052	.016	
4.0	.109	.057	.017	.106	.056	.016	.100	.053	.016	.095	.051	.015	.090	.049	.015	
5.0	.103	.053	.015	.100	.052	.015	.095	.050	.015	.091	.048	.014	.086	.046	.014	
6.0	.098	.049	.014	.095	.048	.014	.091	.047	.014	.087	.045	.013	.083	.044	.013	
7.0	.093	.046	.013	.090	.045	.013	.087	.044	.013	.083	.042	.012	.079	.041	.012	
8.0	.088	.043	.012	.086	.042	.012	.083	.041	.012	.079	.040	.012	.076	.039	.011	
9.0	.084	.041	.011	.082	.040	.011	.079	.039	.011	.076	.038	.011	.074	.037	.011	
10.0	.080	.038	.011	.079	.038	.011	.076	.037	.010	.073	.036	.010	.071	.036	.010	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.149	.149	.149	.127	.127	.127	.087	.087	.087	.050	.050	.050	.016	.016	.016	
1.0	.133	.123	.113	.114	.105	.098	.078	.072	.068	.045	.042	.039	.014	.014	.013	
2.0	.121	.103	.089	.103	.089	.077	.071	.062	.054	.041	.036	.031	.013	.012	.010	
3.0	.110	.089	.071	.094	.076	.062	.065	.053	.043	.037	.031	.026	.012	.010	.008	
4.0	.101	.077	.058	.087	.066	.051	.060	.046	.036	.035	.027	.021	.011	.009	.007	
5.0	.094	.068	.048	.081	.059	.042	.056	.041	.030	.032	.024	.018	.010	.008	.006	
6.0	.088	.060	.040	.075	.052	.035	.052	.036	.025	.030	.021	.015	.010	.007	.005	
7.0	.082	.054	.034	.071	.047	.030	.049	.033	.021	.028	.019	.013	.009	.006	.004	
8.0	.077	.049	.030	.066	.042	.026	.046	.030	.018	.027	.018	.011	.009	.006	.004	
9.0	.073	.045	.026	.063	.039	.022	.044	.027	.016	.025	.016	.010	.008	.005	.003	
10.0	.069	.041	.023	.060	.036	.020	.041	.025	.014	.024	.015	.008	.008	.005	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-DRT 20R
NO DRIVER:DC 24V
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:23.948V I:0.0510A P:1.2210W PF:1.0000 Freq:0Hz Lamp Flux:114.769x1 lm										
NAME: 2417.201					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2405130535		
MFR.: RISE					SUR.: 0.0000785m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	29.6	30.4	29.8	30.6	30.7	29.6	30.5	29.8	30.6	30.8
3H	30.1	30.9	30.4	31.1	31.3	30.0	30.8	30.2	30.9	31.1
4H	30.4	31.1	30.6	31.3	31.5	30.1	30.8	30.4	31.0	31.3
6H	30.5	31.2	30.8	31.4	31.7	30.1	30.8	30.4	31.1	31.3
8H	30.5	31.2	30.8	31.4	31.7	30.1	30.8	30.4	31.1	31.3
12H	30.5	31.2	30.8	31.4	31.7	30.1	30.8	30.4	31.0	31.3
4H 2H	29.8	30.5	30.0	30.7	30.9	29.8	30.6	30.1	30.8	31.0
3H	30.5	31.1	30.8	31.4	31.7	30.4	31.0	30.7	31.3	31.6
4H	30.8	31.4	31.1	31.7	32.0	30.6	31.2	30.9	31.5	31.8
6H	31.0	31.5	31.4	31.8	32.2	30.7	31.2	31.1	31.6	31.9
8H	31.0	31.5	31.4	31.9	32.2	30.7	31.2	31.1	31.6	31.9
12H	31.0	31.5	31.5	31.9	32.3	30.7	31.2	31.1	31.5	31.9
8H 4H	30.8	31.3	31.2	31.7	32.0	30.7	31.1	31.1	31.5	31.9
6H	31.1	31.5	31.5	31.9	32.3	30.9	31.3	31.3	31.7	32.1
8H	31.2	31.5	31.6	32.0	32.4	30.9	31.3	31.4	31.7	32.1
12H	31.2	31.5	31.7	32.0	32.4	30.9	31.2	31.4	31.7	32.2
12H 4H	30.8	31.3	31.2	31.6	32.0	30.6	31.1	31.0	31.4	31.8
6H	31.1	31.4	31.5	31.9	32.3	30.9	31.2	31.3	31.6	32.1
8H	31.2	31.5	31.7	31.9	32.4	30.9	31.2	31.4	31.7	32.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.7 / - 0.9					+ 0.8 / - 1.1				
1.5H	+ 0.7 / - 0.6					+ 0.7 / - 0.9				
2.0H	+ 1.3 / - 1.2					+ 1.5 / - 1.9				

CIE Pub.117, 114.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -7.5)
Area: 7.85e-005 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-DRT 20R
NO DRIVER:DC 24V
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:23.948V I:0.0510A P:1.2210W PF:1.0000 Freq:0Hz Lamp Flux:114.769x1 lm		
NAME: 2417.201	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405130535
MFR.: RISE	SUR.: 0.0000785m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	67	61	58	66	61	58	66	61	58	55
0.80	72	68	64	72	67	64	71	67	64	61
1.00	76	71	68	75	71	68	74	71	68	65
1.25	79	75	72	79	75	72	77	74	71	68
1.50	82	78	75	81	77	74	79	76	74	70
2.00	84	80	78	83	80	77	81	78	76	72
2.50	85	82	80	84	81	79	82	79	77	73
3.00	87	84	82	85	83	81	83	81	79	74
4.00	88	86	84	87	85	83	84	82	81	75
5.00	89	88	86	88	86	85	85	83	82	76
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-DRT 20R
NO DRIVER:DC 24V
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:23.948V I:0.0510A P:1.2210W PF:1.0000 Freq:0Hz Lamp Flux:114.769x1 lm		
NAME: 2417.201	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405130535
MFR.: RISE	SUR.: 0.0000785m2	Shielding Angle:

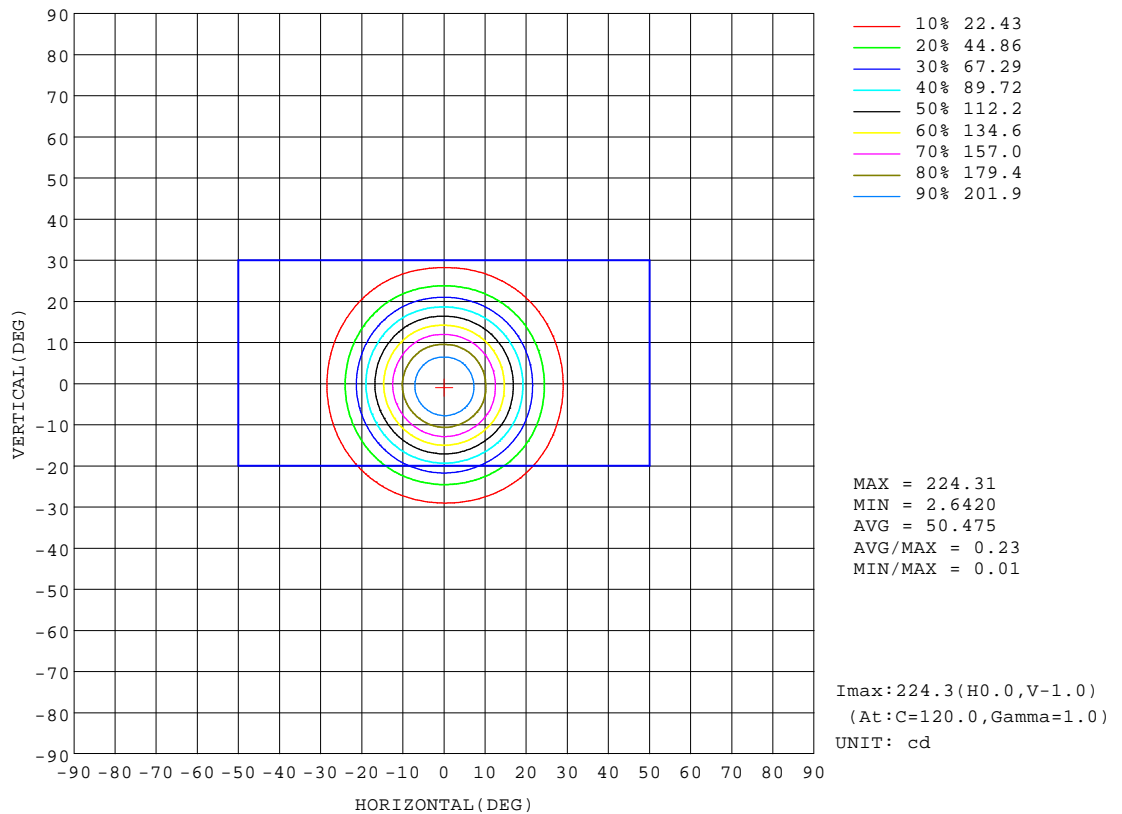


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2024-5-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRE-30G-11H-3A-00-0 Ra: 90
LENS: LL01ZZ-DRT 20R
NO DRIVER: DC 24V
30minutes warm-up

AAI Figure

Test:U:23.948V I:0.0510A P:1.2210W PF:1.0000 Freq:0Hz Lamp Flux:114.769x1 lm		
NAME: 2417.201	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405130535
MFR.: RISE	SUR.: 0.0000785m2	Shielding Angle:

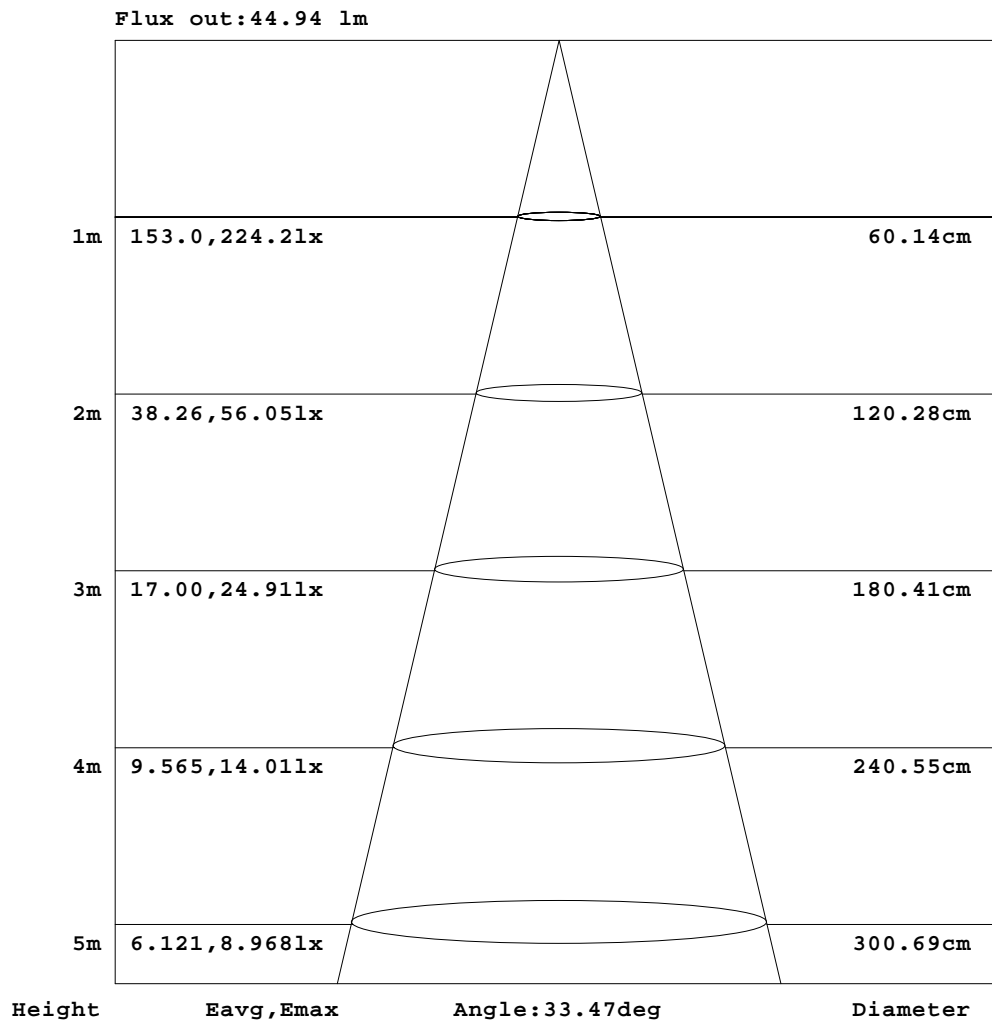


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-DRT 20R
NO DRIVER:DC 24V
30minutes warm-up

ISOLUX DIAGRAM

Test:U:23.948V I:0.0510A P:1.2210W PF:1.0000 Freq:0Hz Lamp Flux:114.769x1 lm		
NAME: 2417.201	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405130535
MFR.: RISE	SUR.: 0.0000785m2	Shielding Angle:

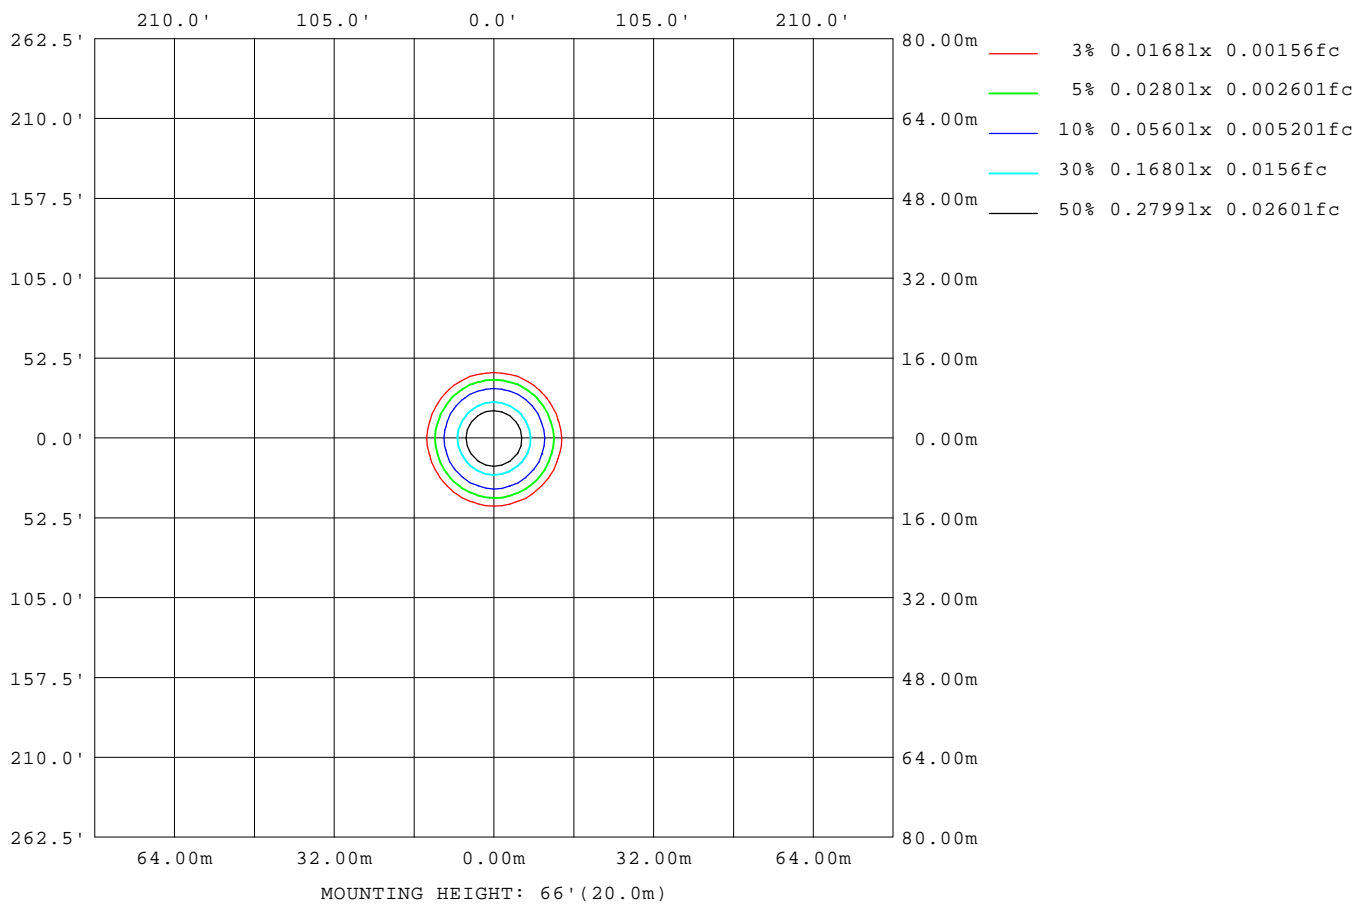

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:zoe
Test Date:2024-5-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-DRT 20R
NO DRIVER:DC 24V
30minutes warm-up

LED Avg.L Report

Test:U:23.948V I:0.0510A P:1.2210W PF:1.0000 Freq:0Hz Lamp Flux:114.769x1 lm		
NAME: 2417.201	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405130535
MFR.: RISE	SUR.: 0.0000785m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	62729
L_0~180(75)av	47083
L_0~180(85)av	27385
L_90~270(65)av	30059
L_90~270(75)av	20472
L_90~270(85)av	12626
L_45(65)av	46262
L_45(75)av	35466
L_45(85)av	21095

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-DRT 20R
NO DRIVER:DC 24V
30minutes warm-up

Planar Illuminance Curve

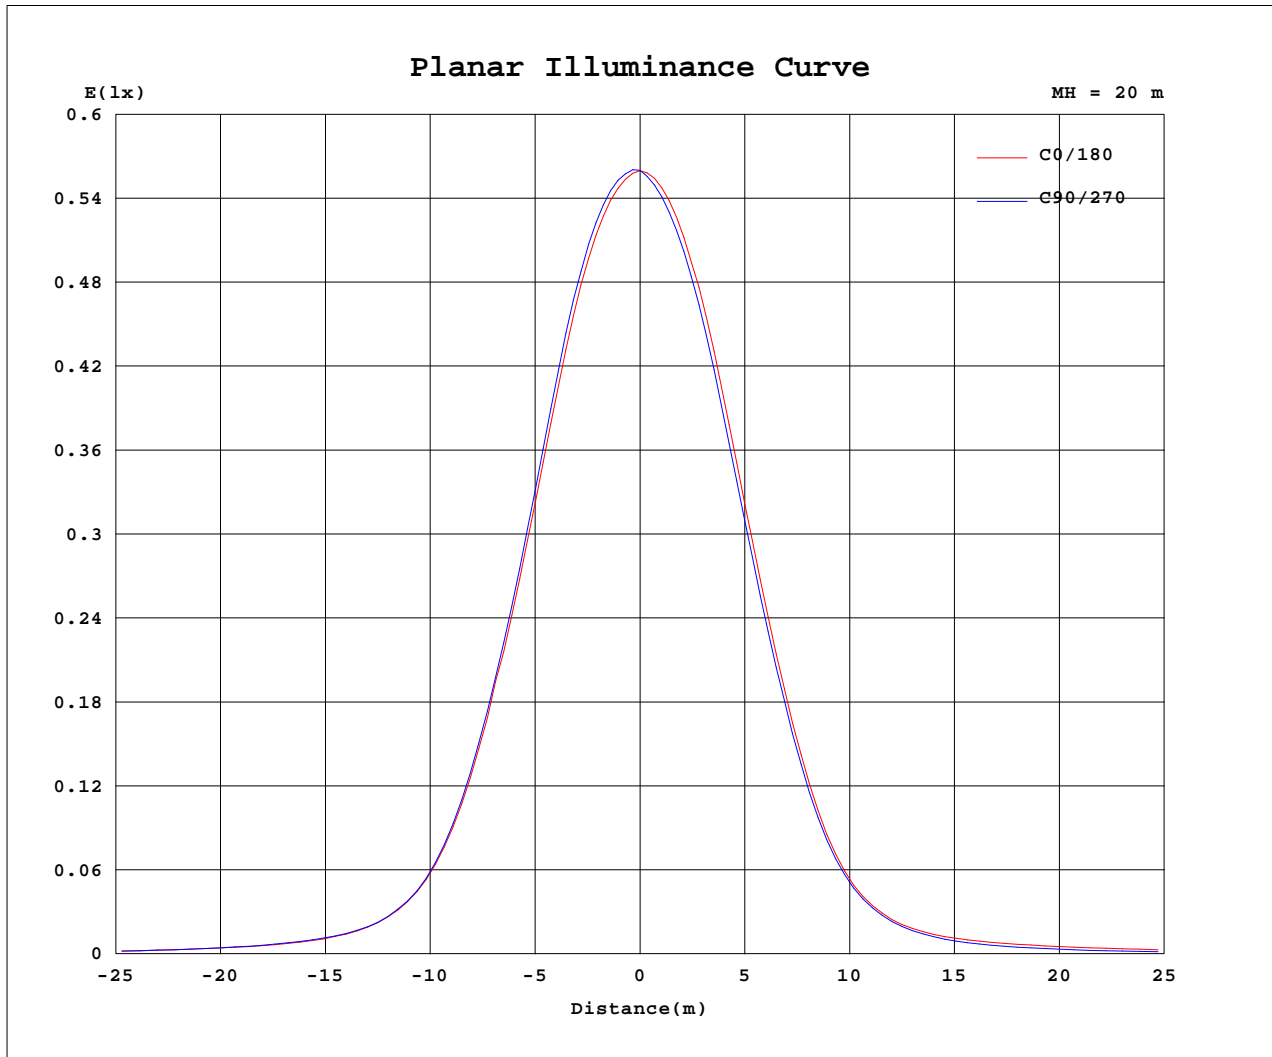

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2024-5-13

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXRE-30G-11H-3A-00-0-0 Ra: 90
 LENS: LL01ZZ-DRT 20R
 NO DRIVER: DC 24V
 30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.948V I:0.0510A P:1.2210W PF:1.0000 Freq:0Hz Lamp Flux:114.769x1 lm		
NAME: 2417.201	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2405130535
MFR.: RISE	SUR.: 0.0000785m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	224	224	224	224	224	224	224	224	224	224	224	224						
5	213	216	216	217	216	214	213	212	210	209	211	212						
10	181	185	185	186	184	182	181	178	177	175	176	178						
15	131	135	134	135	133	131	131	129	128	126	127	129						
20	81.4	83.8	83.0	83.7	82.6	79.6	79.7	78.1	77.6	75.9	77.1	78.8						
25	41.1	42.5	42.2	42.0	41.1	39.3	38.4	37.3	37.7	36.6	37.9	39.5						
30	19.4	20.0	20.0	19.8	19.2	18.5	18.2	17.3	17.4	17.0	17.9	18.2						
35	10.5	10.6	10.8	10.8	10.7	10.0	10.3	9.76	9.57	9.12	9.41	9.73						
40	6.75	7.04	7.28	7.15	7.28	6.90	7.43	6.58	6.35	5.63	6.13	6.22						
45	4.95	5.21	5.52	5.13	5.44	5.28	6.15	5.13	4.73	3.92	4.55	4.69						
50	3.72	3.81	4.14	3.63	4.05	3.97	5.21	4.16	3.61	2.80	3.49	3.72						
55	2.70	2.63	2.94	2.37	2.83	2.85	4.30	3.30	2.64	1.95	2.63	2.86						
60	1.95	1.79	2.02	1.49	1.92	2.01	3.46	2.60	1.97	1.40	2.01	2.19						
65	1.44	1.28	1.44	0.98	1.36	1.48	2.72	2.02	1.47	1.01	1.54	1.69						
70	1.01	0.90	1.02	0.67	0.97	1.07	1.98	1.48	1.04	0.67	1.10	1.24						
75	0.65	0.58	0.66	0.42	0.63	0.71	1.27	0.97	0.67	0.41	0.71	0.81						
80	0.35	0.31	0.35	0.24	0.34	0.39	0.66	0.52	0.36	0.22	0.38	0.43						
85	0.13	0.11	0.13	0.09	0.13	0.15	0.25	0.20	0.14	0.08	0.14	0.16						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2024-5-13

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRE-30G-11H-3A-00-0-0 Ra:90
LENS:LL01ZZ-DRT 20R
NO DRIVER:DC 24V
30minutes warm-up