

GAGA SERIES_(AM)



GAGA (AM)

The GAGA series is a fixture designed with a removable light engine, The light engine can be assembled / disassembled by twisting the light engine. The tool-free fraction is convenient for fixed type and adjustable trim accessory are its advantage.

Accessories include honeycomb, strip glass, a diffusion sheet, clear glass. Parts can be bought separately for easy stocking purposes.
Suitable in the shopping mall, shop, hotel corridor, guest room, bathroom, etc.

Shape
(Baffle Size)




Round
1.7"

Mountings



Recessed Trim Recessed Trimless

Light distributions



Fixed Adjustable

GAGA (AM)

Light source
CRI 90
2700 or 3000 or 4000 Kelvin

Lens

For LEA-01
ACOT-76-15R
ACOT-76-24R
ACOT-76-36R
ACOT-76-50R

Baffle

ACBF-1

Colours :

Black White Gold

Round



RT-GA-1B
Fixed



RT-GA-1A
Adjustable

Accessories

SG7-1 Striped glass

WG7-1 Woven glass

DS7-1 Diffusion sheet

H7-1 Honeycomb louver



Material
Aluminum die cast

Trimless

For a minimalist design, RISE also offers a trimless design that allows the luminaire to sit flush with the ceiling.



RTL-GA-1



Baffle colour

GAGA provide available in many different colour variations to complement custom designs and colour concepts. The select housing colours (white, black) combine beautifully with white, black, or gold baffle, delivering a harmonious, high-quality overall design.

Color available - A

- Black
- White

- B
- Black

White

Gold

GAGA round
fixed / adjustable





Specification



2700 K, 3000 K, 4000 K,
CRI \geq 90




non DIM, TRIAC, 1-10V

Types (round)



Colours

Bezel :  
Black White

Baffle :   
Black White Gold

Beam Angle



15°/24°/36°/50° (Lens)






GAGA-75-RTF2



Article number	2118.573-LEA-01
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable


 Cut out : 2²⁴/₃₂" (70mm)



GAGA-75-RTA2




Article number	2118.574-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable


 Cut out : 2²⁴/₃₂" (70mm)

Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass



GAGA-75-RTLF2



Article number	2118.661-LEA-01
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350



Dimmable




Cut out : 3 11/32" (85mm)



GAGA-75-RTLA2



Article number	2118.662-LEA-01
LED Consumption	8W
Current	200 (mA)
Lumen	756 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350




Dimmable

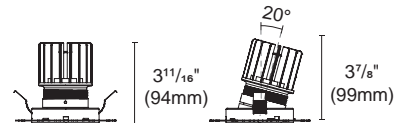

Cut out : 3 11/32" (85mm)


Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glass


INSTALLATION OPTIONS



ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
Type: Gear box

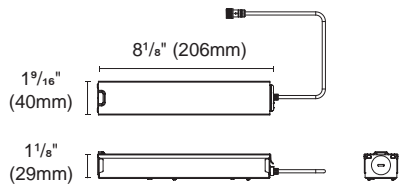


Internal space dimension:
L 4 1/4" (108mm)X W 1 3/8" (35mm)X H 1" (26mm)

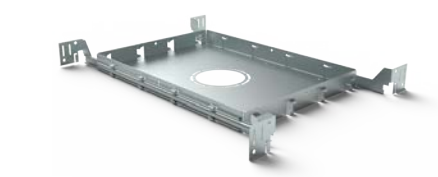

ACCH-12-R70XR85
for GAGA both trim & trimless
Type: New construction plate

Cut out:
Round : 2 24/32" (70mm)
Round : 3 11/32" (85mm)



Suitable in hotel corridor, guest room, bathroom, etc.

