

PAPILLON SERIES (EU)



PAPILLON (EU)

Material: Aluminum die cast trim with powder coating finish, aluminum forging heatsink, plastic baffle can be plated or coated with black, white, piano black or chrome finishes. Light engine can be assemble / disassemble without tool. 20/25/38 degrees beam angle to choose from, accessories are also available for different lighting applications. Residential, shop, office, restaurant & bar, museum, art gallery, showroom.

Shape



Round
85



Square
80

Mountings



Recessed
Trim



Recessed
Trimless

Light distributions



Adjustable



ACOT-35
6° Ultra narrow beam
10W Heatsink



ACOT-36
14W Heatsink



ACOT-35-WCW
Tunable White
9W Heatsink



ACOT-35-DW
Dim to warm
12W Heatsink

Exchangeable light engine
CRI 90
2700 or 3000 or 4000 Kelvin

Lens

For **ACOT-36** or **ACOT-37**
ACOT-76-15R
ACOT-76-24R
ACOT-76-36R
ACOT-76-50R

For **ACOT-35-WCW** or **ACOT-35-DW**
ACOE-1 (13R)
ACOE-3 (31R)

Snoot
ACSN-17

Round or Square Baffles
Plastic



PA85-BRA-P
Adjustable



PA80-BSA-P
Adjustable

Accessories

SG7-1 Striped glass
WG7-1 Woven glass
DS7-1 Diffusion sheet
H7-1 Honeycomb louver



Round or Square Trim or Trimless



RT-15-001B



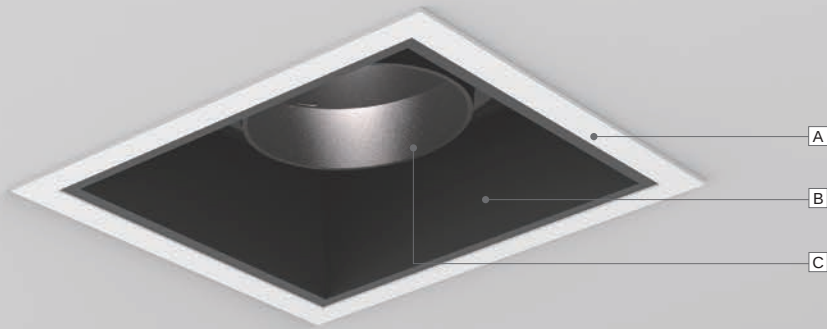
PA80-TS



RTL-A1E



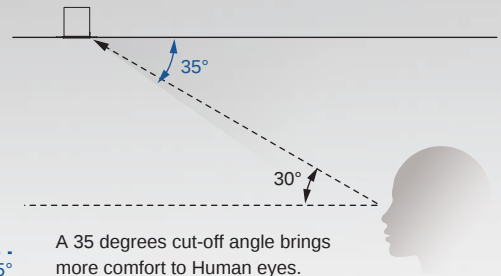

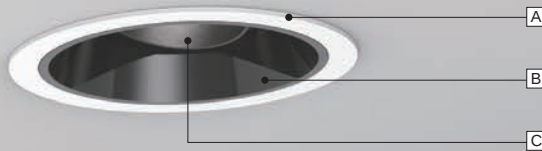
PAPILLON (EU)



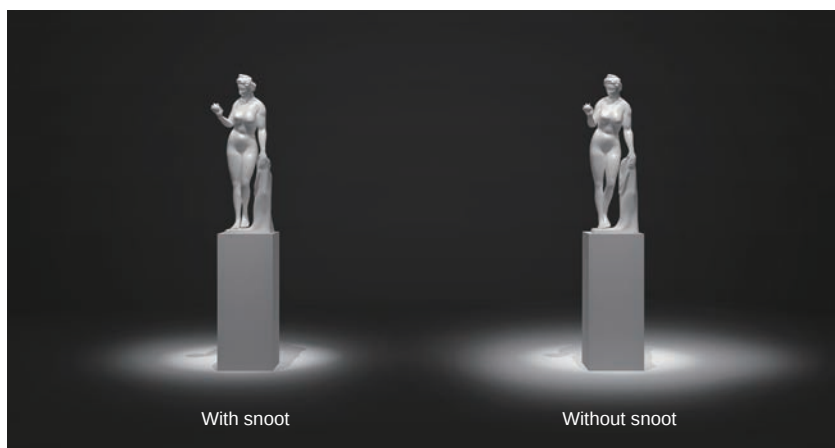
Color available - A / C



B



A 35 degrees cut-off angle brings more comfort to Human eyes.



With snoot

Without snoot

Adding snoot to reduce field angle as much as possible, and more focusing on the object.



PAPILLON-II-85-RTA



PAPILLON-II-85-RTLA



PAPILLON-II-80-STA


Article number 2118.518-ACOT-35

LED Consumption	10W
Current	800 (mA)
Lumen	774 (lm)
Beam Angle	6° (Lens)
CCT	3000K
CRI	90+

Article number 2118.518-ACOT-36

LED Consumption	14W
Current	350 (mA)
Delivered lumen	1005 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Colours :  

White

Black




Baffle :



Piano black



Chrome


Dimmable

Article number 2118.615-ACOT-35

LED Consumption	10W
Current	800 (mA)
Lumen	774 (lm)
Beam Angle	6° (Lens)
CCT	3000K
CRI	90+

Article number 2118.615-ACOT-36

LED Consumption	14W
Current	350 (mA)
Delivered lumen	1005 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CRI	90+



Baffle :    

White

Black

Piano black

Chrome


Dimmable

Article number 2118.516-ACOT-35

LED Consumption	10W
Current	800 (mA)
Lumen	774 (lm)
Beam Angle	6° (Lens)
CCT	3000K
CRI	90+

Article number 2118.516-ACOT-36

LED Consumption	14W
Current	350 (mA)
Delivered lumen	1004 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Colours :  

White

Black




Baffle :



Piano black



Chrome


Dimmable

Accessories
SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACSN-17
Snoot