

IVA SERIES (EU)



IVA (EU)


Focusing on Every Detail

In the field of store design, lighting plays a crucial role—not only in terms of energy efficiency, sustainability, and flexible integration, but also in optimizing the visual appeal of different products and the overall spatial atmosphere. Its impact can be realized immediately in the retail environment.

By choosing innovative fixtures and technologies, such as high-efficiency LEDs and advanced optical designs, energy consumption can be reduced while professional planning helps lower long-term operational costs and effectively showcase the beauty of the products.

Furthermore, replaceable modules minimize resource waste and maintenance costs, delivering significant benefits in modern lighting solutions.



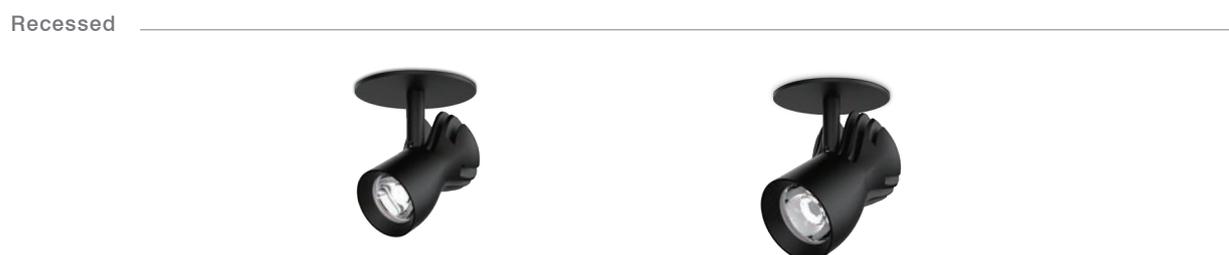

Recessed downlights

85
Downlights

110
Downlights

Round

Trim



Trimless



Multiple lights

For details, please refer to the ESB series in the catalog.

1 Lamp
Trim



1 Lamp
Trimless



2 Lamp
Trim



2 Lamp
Trimless



3 Lamp
Trim



3 Lamp
Trimless








IVA

Offers a wide range of accessories to choose from.

Design of various functional accessories

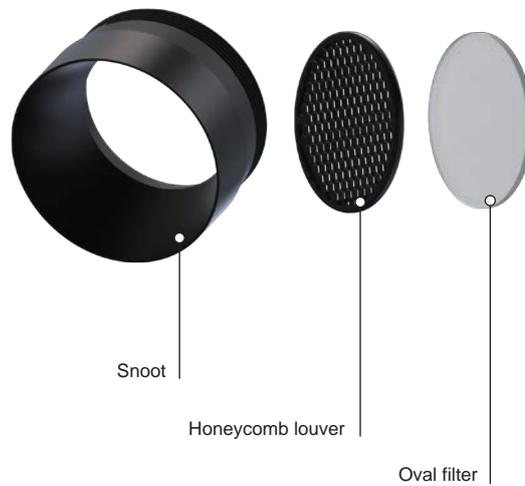


Function Introduction

Snoot Enhances the luminaire's cut-off angle.

Honeycomb louver Reduces glare, lowers brightness, and enhances lighting comfort.

Oval Filter Converts a circular beam into an elliptical one, tailoring it to your lighting needs.
It's particularly suitable for long or custom-shaped lighting areas

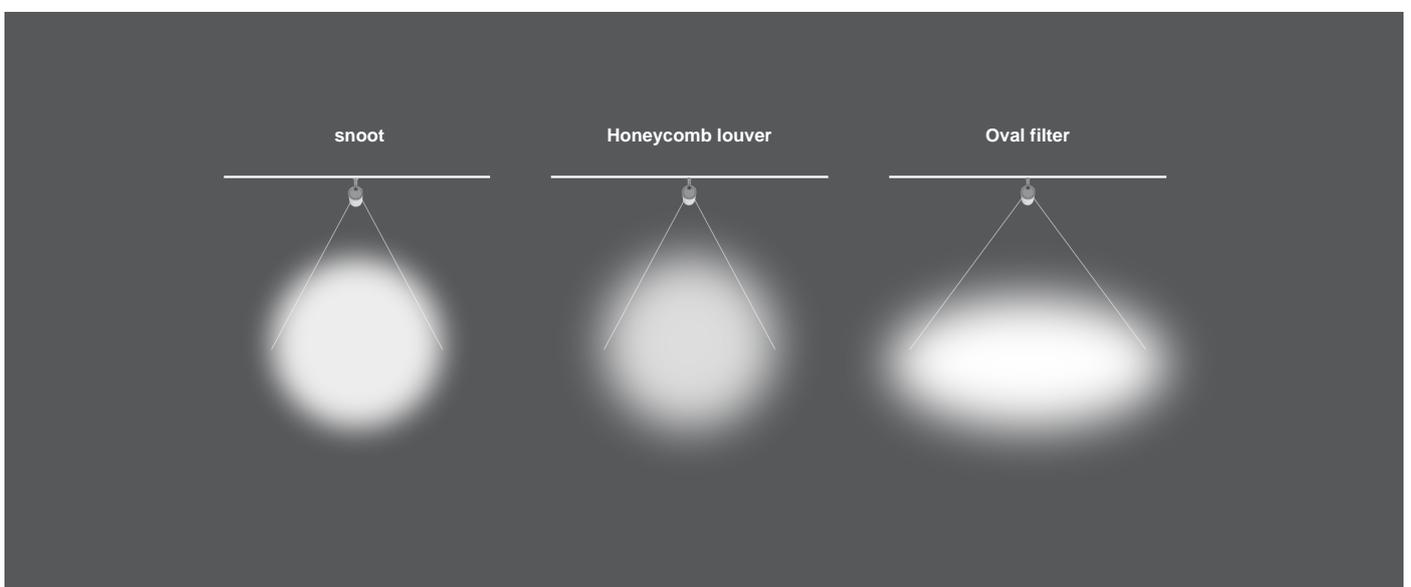





IVA 50/64

Spotlight



IVA 50 Track spotlight

IVA-50-RSP



Colours

Body: Black White

Baffle: Black White

| Article number | LED / Fixture Consumption | Current | LED / Delivered Lumen | Beam Angle | CCT | CRI |
|--------------------|---------------------------|---------|-----------------------|--------------------|-------|-----|
| 2519.217-UA-350-HE | 12W / 14W | 350 mA | 1458 lm / 1245 lm | 17°/30°/50° (Lens) | 3000K | 90+ |

Dimmable



Optional Accessory



S-019
Snoot



H-014
Honeycomb louver





SG-018
Oval PC

IES



Spotlight

2519.217-UA-350-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 17° | | |
| 1.0 | 0.31 | 6912 |
| 2.0 | 0.61 | 1728 |
| 3.0 | 0.92 | 768 |
| 4.0 | 1.23 | 432 |
| 5.0 | 1.53 | 276 |



Spotlight

2519.217-UA-350-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 35° | | |
| 1.0 | 0.61 | 2717 |
| 2.0 | 1.21 | 679 |
| 3.0 | 1.82 | 301 |
| 4.0 | 2.42 | 169 |
| 5.0 | 3.02 | 108 |




Spotlight

2519.217-UA-350-HE



| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 50° | | |
| 1.0 | 0.94 | 943 |
| 2.0 | 1.87 | 235 |
| 3.0 | 2.81 | 104 |
| 4.0 | 3.75 | 58 |
| 5.0 | 4.69 | 37 |





Colours

- Body : Black White
 Baffle : Black White

| Article number | LED / Fixture Consumption | Current | LED / Delivered Lumen | Beam Angle | CCT | CRI |
|--------------------|---------------------------|---------|-----------------------|------------------------|-------|-----|
| 2519.218-UA-500-HE | 18W / 19W | 500 mA | 2504 lm / 2189 lm | 18°/24°/40°/55° (Lens) | 3000K | 90+ |

Dimmable





Optional Accessory



S-001 Snoot
 H-001 Honeycomb louver
 SG-019 Oval PC



IES

18° 2063 lm
 Spotlight
 2519.218-UA-500-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 18° | | |
| 1.0 | 0.33 | 10217 |
| 2.0 | 0.65 | 2554 |
| 3.0 | 0.98 | 1135 |
| 4.0 | 1.31 | 638 |
| 5.0 | 1.63 | 408 |

24° 2189 lm
 Spotlight
 2519.218-UA-500-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 24° | | |
| 1.0 | 0.44 | 7584 |
| 2.0 | 1.87 | 1896 |
| 3.0 | 1.31 | 842 |
| 4.0 | 1.75 | 474 |
| 5.0 | 2.18 | 303 |

40° 2178 lm
 Spotlight
 2519.218-UA-500-HE




| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 40° | | |
| 1.0 | 0.71 | 3546 |
| 2.0 | 1.43 | 886 |
| 3.0 | 2.14 | 394 |
| 4.0 | 2.85 | 221 |
| 5.0 | 3.57 | 141 |

55° 2085 lm
 Spotlight
 2519.218-UA-500-HE



| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 55° | | |
| 1.0 | 1.02 | 1770 |
| 2.0 | 2.03 | 442 |
| 3.0 | 3.05 | 196 |
| 4.0 | 4.07 | 110 |
| 5.0 | 5.08 | 70 |



IVA 50 Recessed spotlight

IVA-50-RTA



Colours

Body: Black White

Baffle: Black White

| Article number | LED / Fixture Consumption | Current | LED / Delivered Lumen | Beam Angle | CCT | CRI |
|----------------|---------------------------|---------|-----------------------|--------------------|-------|-----|
| 2518.117-HE | 12W / 14W | 350 mA | 1458 lm / 1245 lm | 17°/30°/50° (Lens) | 3000K | 90+ |

Dimmable



Optional Accessory



S-019
Snoot



H-014
Honeycomb louver





SG-018
Oval PC

IES

 **17°** 1206 lm

Spotlight

2518.117-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 17° | | |
| 1.0 | 0.31 | 6912 |
| 2.0 | 0.61 | 1728 |
| 3.0 | 0.92 | 768 |
| 4.0 | 1.23 | 432 |
| 5.0 | 1.53 | 276 |

 **30°** 1245 lm

Spotlight

2518.117-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 35° | | |
| 1.0 | 0.61 | 2717 |
| 2.0 | 1.21 | 679 |
| 3.0 | 1.82 | 301 |
| 4.0 | 2.42 | 169 |
| 5.0 | 3.02 | 108 |


 **50°** 1103 lm

Spotlight

2518.117-HE



| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 50° | | |
| 1.0 | 0.94 | 943 |
| 2.0 | 1.87 | 235 |
| 3.0 | 2.81 | 104 |
| 4.0 | 3.75 | 58 |
| 5.0 | 4.69 | 37 |



 Cut out :75mm

IVA 64 Recessed spotlight

IVA-64-RTA



Colours

Body : Black White

Baffle : Black White

| Article number | LED / Fixture Consumption | Current | LED / Delivered Lumen | Beam Angle | CCT | CRI |
|----------------|---------------------------|---------|-----------------------|------------------------|-------|-----|
| 2518.118-HE | 18W / 19W | 500 mA | 2504 lm / 2189 lm | 18°/24°/40°/55° (Lens) | 3000K | 90+ |

Dimmable



Optional Accessory



S-001
Snoot



H-001
Honeycomb louver





SG-019
Oval PC

IES

18° 2063 lm

Spotlight

2518.118-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 18° | | |
| 1.0 | 0.33 | 10217 |
| 2.0 | 0.65 | 2554 |
| 3.0 | 0.98 | 1135 |
| 4.0 | 1.31 | 638 |
| 5.0 | 1.63 | 408 |

24° 2189 lm

Spotlight

2518.118-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 24° | | |
| 1.0 | 0.44 | 7584 |
| 2.0 | 1.87 | 1896 |
| 3.0 | 1.31 | 842 |
| 4.0 | 1.75 | 474 |
| 5.0 | 2.18 | 303 |

40° 2178 lm

Spotlight

2518.118-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 40° | | |
| 1.0 | 0.71 | 3546 |
| 2.0 | 1.43 | 886 |
| 3.0 | 2.14 | 394 |
| 4.0 | 2.85 | 221 |
| 5.0 | 3.57 | 141 |


55° 2085 lm

Spotlight

2518.118-HE



| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 55° | | |
| 1.0 | 1.02 | 1770 |
| 2.0 | 2.03 | 442 |
| 3.0 | 3.05 | 196 |
| 4.0 | 4.07 | 110 |
| 5.0 | 5.08 | 70 |



Cut out :75mm

IVA 50 Surface mounted spotlight

IVA-50-RSF



Colours

Body: Black White

Baffle: Black White

| Article number | LED / Fixture Consumption | Current | LED / Delivered Lumen | Beam Angle | CCT | CRI |
|----------------|---------------------------|---------|-----------------------|--------------------|-------|-----|
| 2519.317-HE | 12W / 14W | 350 mA | 1458 lm / 1245 lm | 17°/30°/50° (Lens) | 3000K | 90+ |

Dimmable



Optional Accessory



S-019
Snoot



H-014
Honeycomb louver





SG-018
Oval PC

IES





Spotlight
2519.317-HE



| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 17° | | |
| 1.0 | 0.31 | 6912 |
| 2.0 | 0.61 | 1728 |
| 3.0 | 0.92 | 768 |
| 4.0 | 1.23 | 432 |
| 5.0 | 1.53 | 276 |





Spotlight
2519.317-HE




| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 35° | | |
| 1.0 | 0.61 | 2717 |
| 2.0 | 1.21 | 679 |
| 3.0 | 1.82 | 301 |
| 4.0 | 2.42 | 169 |
| 5.0 | 3.02 | 108 |



Spotlight
2519.317-HE



| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 50° | | |
| 1.0 | 0.94 | 943 |
| 2.0 | 1.87 | 235 |
| 3.0 | 2.81 | 104 |
| 4.0 | 3.75 | 58 |
| 5.0 | 4.69 | 37 |



Cut out :23x38mm
(Place driver)

IVA 64 Surface mounted spotlight

IVA-64-RSF



Colours

Body : Black White

Baffle : Black White

| Article number | LED / Fixture Consumption | Current | LED / Delivered Lumen | Beam Angle | CCT | CRI |
|----------------|---------------------------|---------|-----------------------|------------------------|-------|-----|
| 2519.318-HE | 18W / 19W | 500 mA | 2504 lm / 2189 lm | 18°/24°/40°/55° (Lens) | 3000K | 90+ |

Dimmable



Optional Accessory



S-001
Snoot



H-001
Honeycomb louver





SG-019
Oval PC

IES

18° 2063 lm

Spotlight

2519.318-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 18° | | |
| 1.0 | 0.33 | 10217 |
| 2.0 | 0.65 | 2554 |
| 3.0 | 0.98 | 1135 |
| 4.0 | 1.31 | 638 |
| 5.0 | 1.63 | 408 |

24° 2189 lm

Spotlight

2519.318-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 24° | | |
| 1.0 | 0.44 | 7584 |
| 2.0 | 1.87 | 1896 |
| 3.0 | 1.31 | 842 |
| 4.0 | 1.75 | 474 |
| 5.0 | 2.18 | 303 |

40° 2178 lm

Spotlight

2519.318-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 40° | | |
| 1.0 | 0.71 | 3546 |
| 2.0 | 1.43 | 886 |
| 3.0 | 2.14 | 394 |
| 4.0 | 2.85 | 221 |
| 5.0 | 3.57 | 141 |


55° 2085 lm

Spotlight

2519.318-HE



| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 55° | | |
| 1.0 | 1.02 | 1770 |
| 2.0 | 2.03 | 442 |
| 3.0 | 3.05 | 196 |
| 4.0 | 4.07 | 110 |
| 5.0 | 5.08 | 70 |



Cut out :23x38mm
(Place driver)





IVA 85/110

Recessed downlights



IVA 85 Recessed downlight

IVA-85-RTA / IVA-85-RTLA



Colours

Bezel : Black White

Baffle : Black White

| Article number | LED / Fixture Consumption | Current | LED / Delivered Lumen | Beam Angle | CCT | CRI |
|-----------------|---------------------------|---------|-----------------------|--------------------|-------|-----|
| Trim | | | | | | |
| 2518.119-HE | 12W / 14W | 350 mA | 1458 lm / 1245 lm | 17°/30°/50° (Lens) | 3000K | 90+ |
| Trimless | | | | | | |
| 2518.219-HE | 12W / 14W | 350 mA | 1458 lm / 1245 lm | 17°/30°/50° (Lens) | 3000K | 90+ |

Dimmable



Optional Accessory




S-019
Snoot


H-014
Honeycomb louver

SG-018
Oval PC

IES



⊖ Cut out : 80mm (Trim)





⊖ Cut out : 80mm (Trimless)

17° 1206 lm

Adjustable

2518.119-HE
2518.219-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 17° | | |
| 1.0 | 0.31 | 6912 |
| 2.0 | 0.61 | 1728 |
| 3.0 | 0.92 | 768 |
| 4.0 | 1.23 | 432 |
| 5.0 | 1.53 | 276 |

30° 1245 lm

Adjustable

2518.119-HE
2518.219-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 35° | | |
| 1.0 | 0.61 | 2717 |
| 2.0 | 1.21 | 679 |
| 3.0 | 1.82 | 301 |
| 4.0 | 2.42 | 169 |
| 5.0 | 3.02 | 108 |

50° 1103 lm

Adjustable

2518.119-HE
2518.219-HE



| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 50° | | |
| 1.0 | 0.94 | 943 |
| 2.0 | 1.87 | 235 |
| 3.0 | 2.81 | 104 |
| 4.0 | 3.75 | 58 |
| 5.0 | 4.69 | 37 |

IVA 110 Recessed downlight

IVA-110-RTA / IVA-110-RTLA



Colours

Bezel : Black White

Baffle : Black White

| Article number | LED / Fixture Consumption | Current | LED / Delivered Lumen | Beam Angle | CCT | CRI |
|-----------------|---------------------------|---------|-----------------------|------------------------|-------|-----|
| Trim | | | | | | |
| 2518.120-HE | 18W / 19W | 500 mA | 2504 lm / 2189 lm | 18°/24°/40°/55° (Lens) | 3000K | 90+ |
| Trimless | | | | | | |
| 2518.220-HE | 18W / 19W | 500 mA | 2504 lm / 2189 lm | 18°/24°/40°/55° (Lens) | 3000K | 90+ |

Dimmable



Optional Accessory



S-001
Snoot

H-001
Honeycomb louver



SG-019
Oval PC

IES

18° 2063 lm

Adjustable

2518.120-HE
2518.220-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 18° | | |
| 1.0 | 0.33 | 10217 |
| 2.0 | 0.65 | 2554 |
| 3.0 | 0.98 | 1135 |
| 4.0 | 1.31 | 638 |
| 5.0 | 1.63 | 408 |

24° 2189 lm

Adjustable

2518.120-HE
2518.220-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 24° | | |
| 1.0 | 0.44 | 7584 |
| 2.0 | 1.87 | 1896 |
| 3.0 | 1.31 | 842 |
| 4.0 | 1.75 | 474 |
| 5.0 | 2.18 | 303 |

40° 2178 lm

Adjustable

2518.120-HE
2518.220-HE





| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 40° | | |
| 1.0 | 0.71 | 3546 |
| 2.0 | 1.43 | 886 |
| 3.0 | 2.14 | 394 |
| 4.0 | 2.85 | 221 |
| 5.0 | 3.57 | 141 |


55° 2085 lm

Adjustable


2518.120-HE
2518.220-HE



| H(m) | D(m) | E(lx) |
|------------|------|-------|
| 55° | | |
| 1.0 | 1.02 | 1770 |
| 2.0 | 2.03 | 442 |
| 3.0 | 3.05 | 196 |
| 4.0 | 4.07 | 110 |
| 5.0 | 5.08 | 70 |



⊖ Cut out : 100mm (Trim)



⊖ Cut out : 100mm (Trimless)