

Luminaire Photograph



Light Output Ratio:	58.4%	
Luminaire Power:	8.536 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	0.30	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30G06T0-C-83 Ra:90
LENS: WT-25@12-24COBL4-Y1 24R
DRIVER: LS-8-200LI1 EXC 200mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

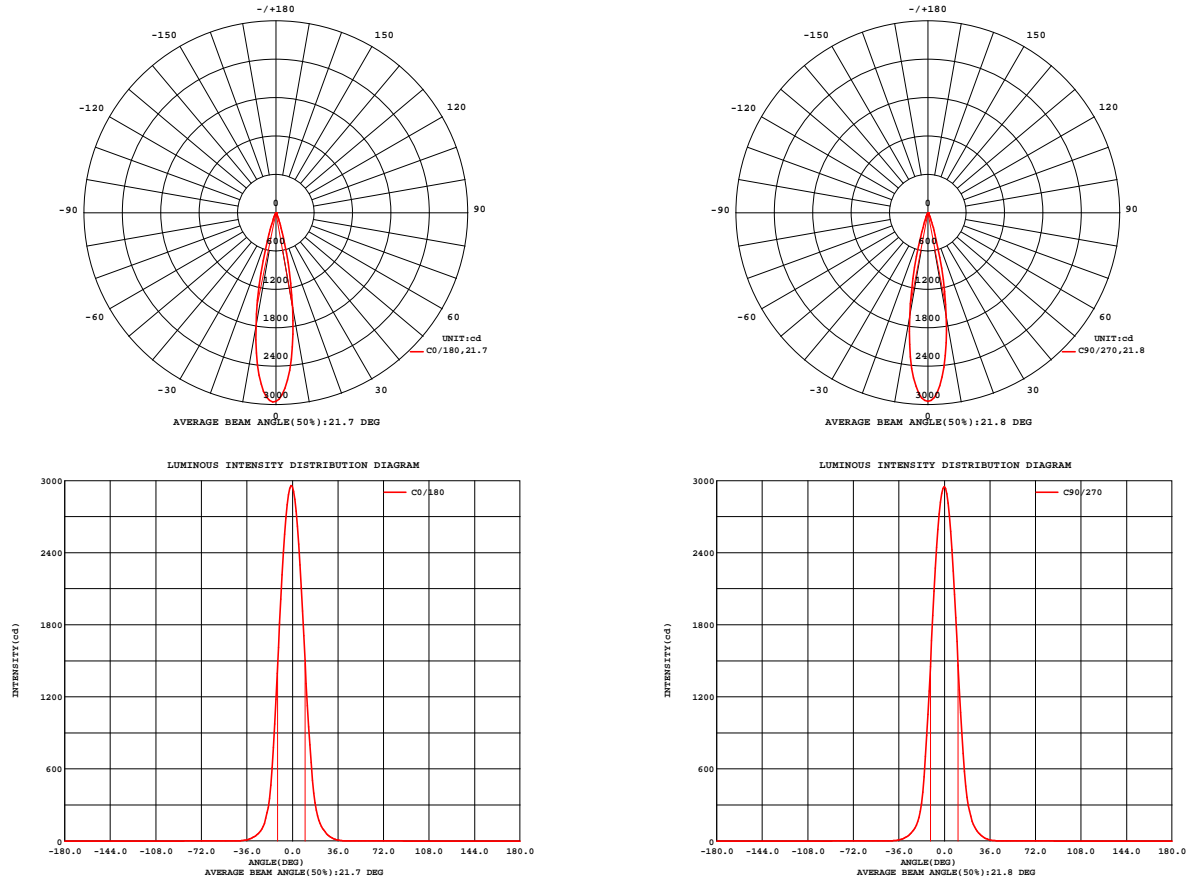


Fig. C0/C180

Fig. C90/C270

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30G06T0-C-83 Ra: 90
LENS: WT-25@12-24COBL4-Y1 24R
DRIVER: LS-8-200LI1 EXC 200mA
30minutes warm-up


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.21V I:0.0403A P:8.5361W PF:0.9601 Freq:49.99Hz
Lamp Flux:809.024x1 lm


NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210246
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 55.32 lm/W			
MODEL	Brideglux	I _{max} (cd)	2957	S/MH(C0/180)	0.38
NOMINAL POWER(W)	8	LOR(%)	58.4	S/MH(C90/270)	0.36
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	472.23	UP,DN(C0-180)	0.0,29.2
NOMINAL FLUX(lm)	809.024	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,29.2
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	down(%)	58.4	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

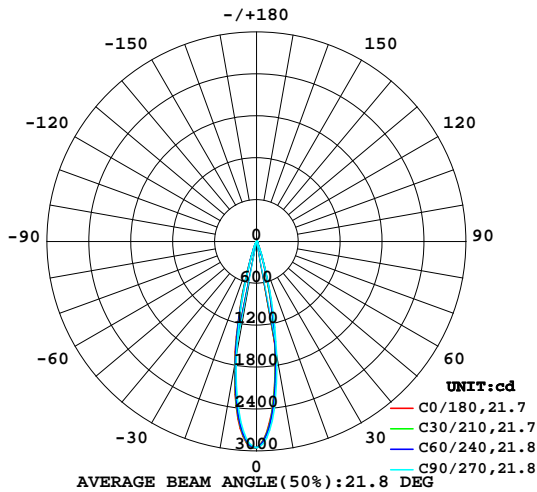

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

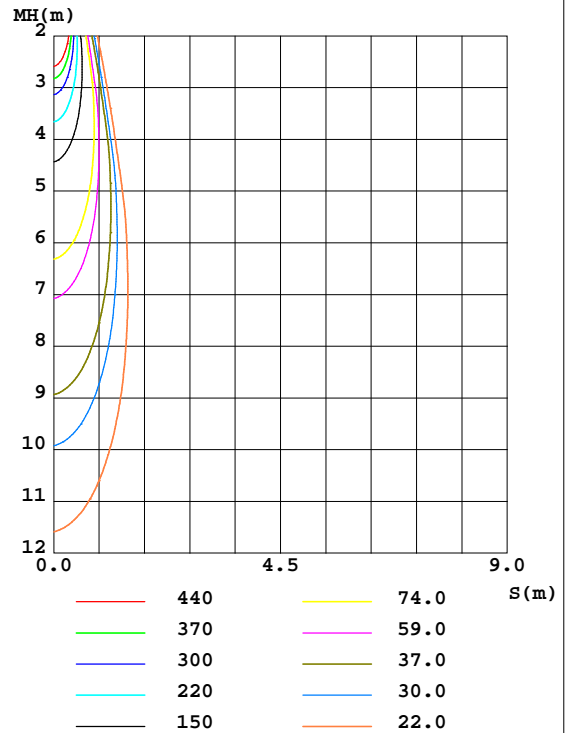

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90
LENS:WT-25@12-24COBL4-Y1 24R
DRIVER:LS-8-200LI1 EXC 200mA
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	1504	1556	1662	1760	1812	1761	1666	1570	0- 10	216.2	216.2	45.8,26.7
20	209.0	231.2	250.1	239.7	234.6	211.8	196.2	210.2	10- 20	202.3	418.5	88.6,51.7
30	34.33	36.64	37.99	37.73	35.48	34.05	32.73	33.45	20- 30	43.74	462.2	97.9,57.1
40	2.595	2.788	2.847	2.949	2.856	2.903	2.748	2.545	30- 40	8.493	470.7	99.7,58.2
50	0.3677	0.3669	0.4069	0.4197	0.3499	0.3718	0.4608	0.4767	40- 50	0.9212	471.7	99.9,58.3
60	0.2947	0.2903	0.3179	0.3211	0.2948	0.3262	0.4035	0.3482	50- 60	0.3297	472.0	99.9,58.3
70	0.0639	0.0644	0.0726	0.0805	0.0956	0.0940	0.0840	0.0693	60- 70	0.2095	472.2	100,58.4
80	0.0127	0.0048	0.0102	0.0098	0.0141	0.0091	0.0115	0.0051	70- 80	0.0354	472.2	100,58.4
90	0	0	0	0	0	0	0	0	80- 90	0.0020	472.2	100,58.4
100	0	0	0	0	0	0	0	0	90-100	0	472.2	100,58.4
110	0	0	0	0	0	0	0	0	100-110	0	472.2	100,58.4
120	0	0	0	0	0	0	0	0	110-120	0	472.2	100,58.4
130	0	0	0	0	0	0	0	0	120-130	0	472.2	100,58.4
140	0	0	0	0	0	0	0	0	130-140	0	472.2	100,58.4
150	0	0	0	0	0	0	0	0	140-150	0	472.2	100,58.4
160	0	0	0	0	0	0	0	0	150-160	0	472.2	100,58.4
170	0	0	0	0	0	0	0	0	160-170	0	472.2	100,58.4
180	0	0	0	0	0	0	0	0	170-180	0	472.2	100,58.4
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90
LENS:WT-25@12-24COBL4-Y1 24R
DRIVER:LS-8-200LI1 EXC 200mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:220.21V I:0.0403A P:8.5361W PF:0.9601 Freq:49.99Hz
Lamp Flux:809.024x1 lm

NAME: D55

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2504210246

MFR.: RISE

SUR.: 0.001074665m2

Shielding Angle:

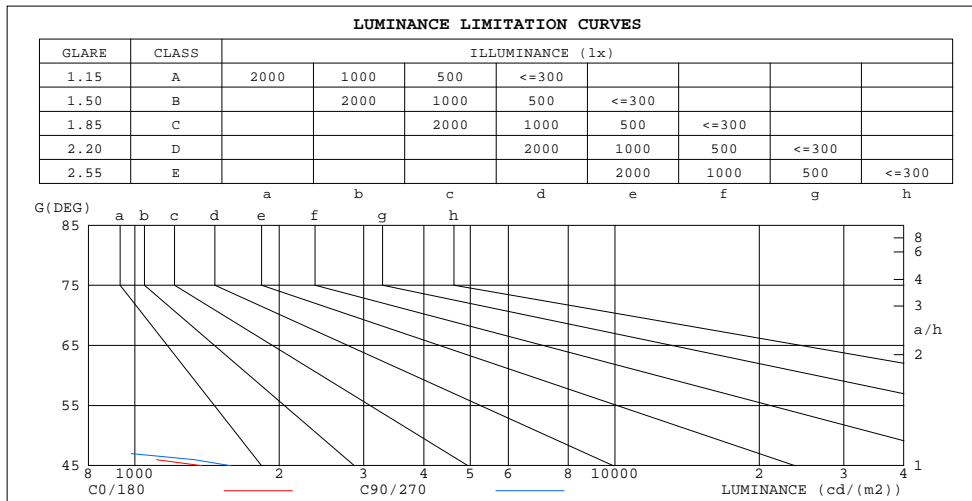

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	17	13
80	68	55
75	97	97
70	174	197
65	474	477
60	549	591
55	550	584
50	533	588
45	1380	1586

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-4-21


Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90
LENS:WT-25@12-24COBL4-Y1 24R
DRIVER:LS-8-200LI1 EXC 200mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.21V I:0.0403A P:8.5361W PF:0.9601 Freq:49.99Hz
Lamp Flux:809.024x1 lm

NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210246
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

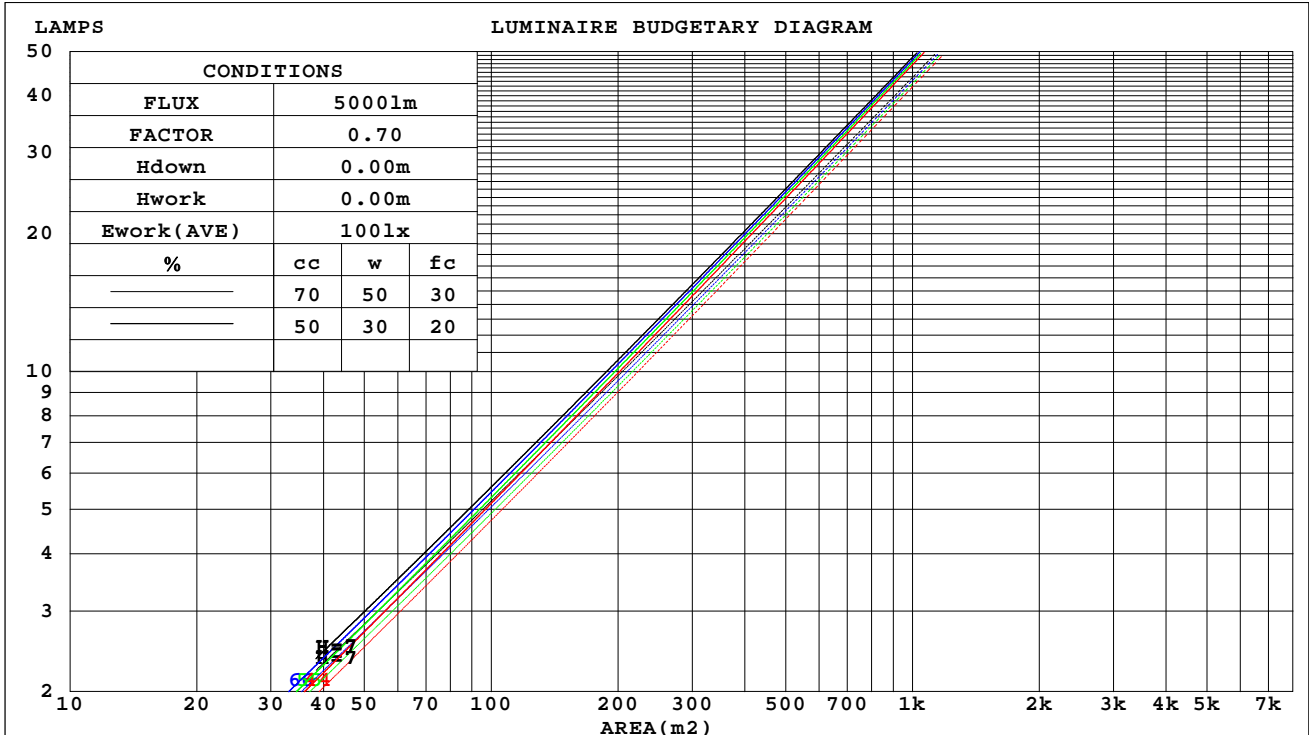

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90
LENS:WT-25@12-24COBL4-Y1 24R
DRIVER:LS-8-200LI1 EXC 200mA
30minutes warm-up

WEC AND CCEC

Test:U:220.21V I:0.0403A P:8.5361W PF:0.9601 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210246
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.073	.042	.013	.070	.040	.013	.062	.036	.011	.056	.032	.010	.050	.029	.009	
2.0	.067	.037	.011	.064	.035	.011	.058	.032	.010	.053	.030	.009	.048	.027	.009	
3.0	.062	.033	.010	.060	.032	.010	.055	.030	.009	.050	.028	.008	.046	.026	.008	
4.0	.058	.030	.009	.056	.029	.009	.052	.027	.008	.048	.026	.008	.044	.024	.007	
5.0	.054	.028	.008	.053	.027	.008	.049	.026	.008	.046	.024	.007	.043	.023	.007	
6.0	.051	.026	.007	.050	.025	.007	.047	.024	.007	.044	.023	.007	.041	.022	.006	
7.0	.048	.024	.007	.047	.023	.007	.045	.023	.006	.042	.022	.006	.040	.021	.006	
8.0	.046	.023	.006	.045	.022	.006	.043	.021	.006	.041	.021	.006	.039	.020	.006	
9.0	.044	.021	.006	.043	.021	.006	.041	.020	.006	.039	.020	.006	.037	.019	.005	
10.0	.042	.020	.006	.041	.020	.006	.039	.019	.005	.038	.019	.005	.036	.018	.005	

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.111	.111	.111	.095	.095	.095	.065	.065	.065	.037	.037	.037	.012	.012	.012	
1.0	.098	.092	.087	.084	.079	.075	.057	.054	.052	.033	.031	.030	.011	.010	.010	
2.0	.087	.077	.070	.074	.067	.060	.051	.046	.042	.029	.027	.025	.009	.009	.008	
3.0	.078	.066	.057	.067	.057	.049	.046	.040	.035	.026	.023	.020	.008	.008	.007	
4.0	.070	.057	.047	.060	.049	.041	.041	.034	.029	.024	.020	.017	.008	.007	.006	
5.0	.064	.050	.039	.055	.043	.034	.038	.030	.024	.022	.018	.014	.007	.006	.005	
6.0	.058	.044	.033	.050	.038	.029	.034	.027	.021	.020	.016	.012	.006	.005	.004	
7.0	.054	.039	.029	.046	.034	.025	.032	.024	.018	.018	.014	.011	.006	.005	.003	
8.0	.050	.035	.025	.043	.030	.022	.030	.021	.015	.017	.013	.009	.006	.004	.003	
9.0	.046	.031	.022	.040	.027	.019	.028	.019	.013	.016	.011	.008	.005	.004	.003	
10.0	.043	.029	.019	.037	.025	.016	.026	.017	.012	.015	.010	.007	.005	.003	.002	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90
LENS:WT-25@12-24COBL4-Y1 24R
DRIVER:LS-8-200LI1 EXC 200mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:220.21V I:0.0403A P:8.5361W PF:0.9601 Freq:49.99Hz Lamp Flux:809.024x1 lm										
NAME: D55			TYPE:			WEIGHT:				
SPEC.: 3000K			DIM.:			SERIAL No.: 2504210246				
MFR.: RISE			SUR.: 0.001074665m2			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.7	5.3	4.9	5.4	5.6	5.3	5.9	5.5	6.1	6.2
3H	4.6	5.1	4.8	5.3	5.5	5.2	5.8	5.5	5.9	6.1
4H	4.5	5.0	4.8	5.2	5.4	5.1	5.7	5.4	5.9	6.1
6H	4.4	4.9	4.7	5.1	5.4	5.1	5.6	5.3	5.8	6.0
8H	4.4	4.9	4.7	5.1	5.3	5.0	5.5	5.3	5.7	6.0
12H	4.3	4.8	4.6	5.0	5.3	5.0	5.4	5.3	5.7	5.9
4H 2H	4.5	5.0	4.8	5.2	5.4	5.1	5.7	5.4	5.9	6.1
3H	4.4	4.8	4.7	5.1	5.3	5.0	5.5	5.3	5.7	6.0
4H	4.3	4.7	4.6	5.0	5.3	4.9	5.3	5.2	5.6	5.9
6H	4.2	4.5	4.5	4.9	5.2	4.8	5.2	5.2	5.5	5.8
8H	4.1	4.5	4.5	4.8	5.2	4.7	5.1	5.1	5.4	5.8
12H	4.1	4.4	4.5	4.7	5.1	4.7	5.0	5.1	5.4	5.8
8H 4H	4.1	4.5	4.5	4.8	5.2	4.7	5.1	5.1	5.4	5.8
6H	4.0	4.3	4.4	4.7	5.1	4.6	4.9	5.0	5.3	5.7
8H	3.9	4.2	4.4	4.6	5.0	4.6	4.8	5.0	5.2	5.7
12H	3.9	4.1	4.3	4.5	5.0	4.5	4.7	5.0	5.2	5.6
12H 4H	4.1	4.4	4.5	4.7	5.1	4.7	5.0	5.1	5.4	5.8
6H	3.9	4.2	4.4	4.6	5.0	4.6	4.8	5.0	5.2	5.7
8H	3.9	4.1	4.3	4.5	5.0	4.5	4.7	5.0	5.2	5.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.6 / - 7.1					+ 4.5 / - 7.2				
1.5H	+ 7.1 / - 7.1					+ 7.0 / - 7.2				
2.0H	+ 4.0 / - 2.0					+ 4.5 / - 2.3				

CIE Pub.117, 809.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.7)
Area: 0.00107466 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90
LENS:WT-25@12-24COBL4-Y1 24R
DRIVER:LS-8-200LI1 EXC 200mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:220.21V I:0.0403A P:8.5361W PF:0.9601 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210246
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	53	50	48	53	50	48	53	50	48	46
0.80	57	54	52	57	54	52	56	54	52	50
1.00	60	57	55	59	56	55	58	56	54	52
1.25	62	59	57	61	59	57	60	58	56	54
1.50	63	61	59	62	60	59	61	59	58	55
2.00	64	62	60	63	61	60	62	60	59	56
2.50	65	63	61	64	62	61	62	61	60	57
3.00	66	64	63	65	63	62	63	62	61	57
4.00	67	65	64	66	65	64	64	63	62	58
5.00	68	66	66	66	65	65	64	63	63	58
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90
LENS:WT-25@12-24COBL4-Y1 24R
DRIVER:LS-8-200LI1 EXC 200mA
30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:220.21V I:0.0403A P:8.5361W PF:0.9601 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210246
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

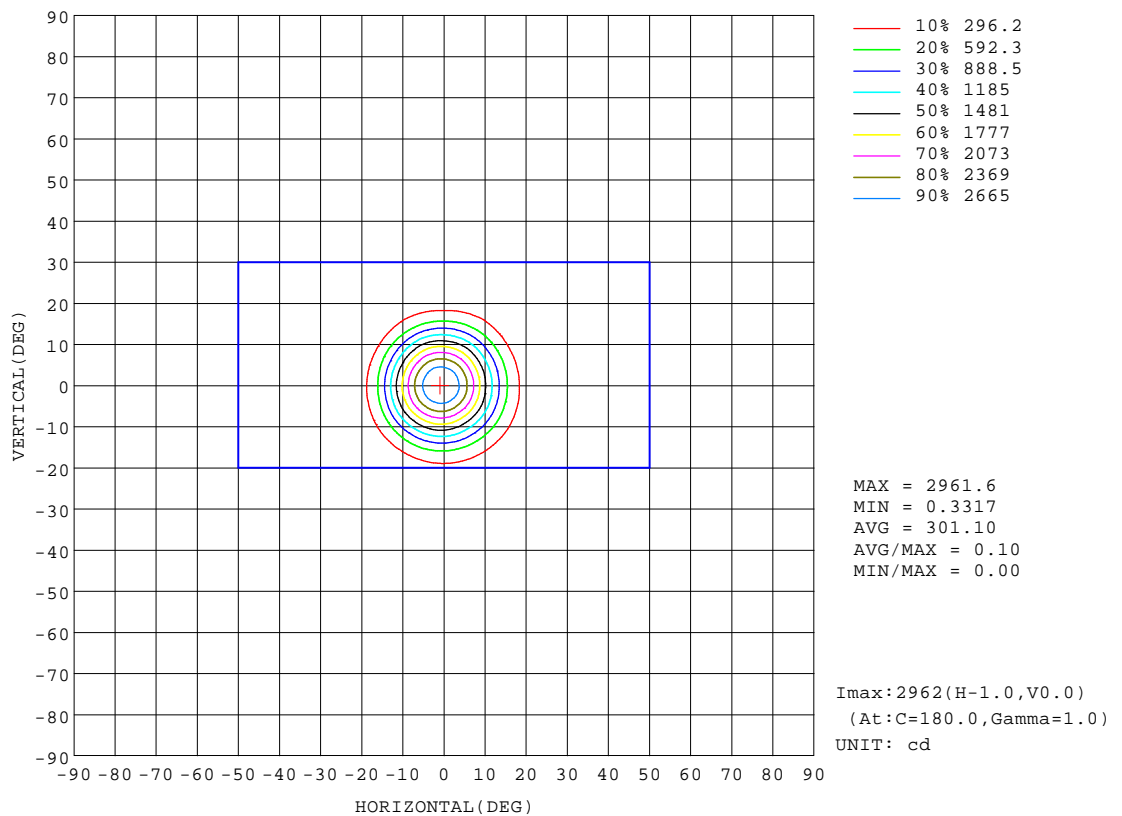


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90
LENS:WT-25@12-24COBL4-Y1 24R
DRIVER:LS-8-200LI1 EXC 200mA
30minutes warm-up

AAI Figure

Test:U:220.21V I:0.0403A P:8.5361W PF:0.9601 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210246
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

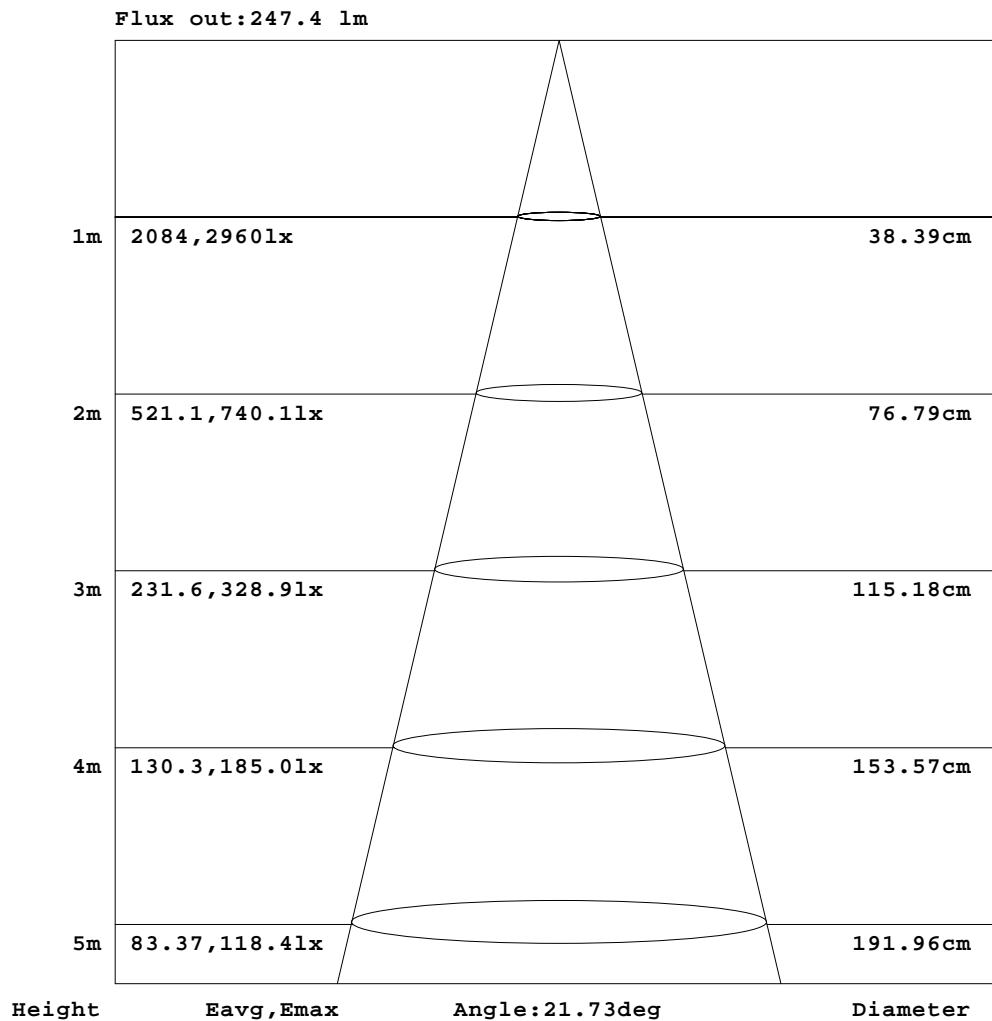


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90
LENS:WT-25@12-24COBL4-Y1 24R
DRIVER:LS-8-200LI1 EXC 200mA
30minutes warm-up

ISOLUX DIAGRAM

Test:U:220.21V I:0.0403A P:8.5361W PF:0.9601 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210246
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

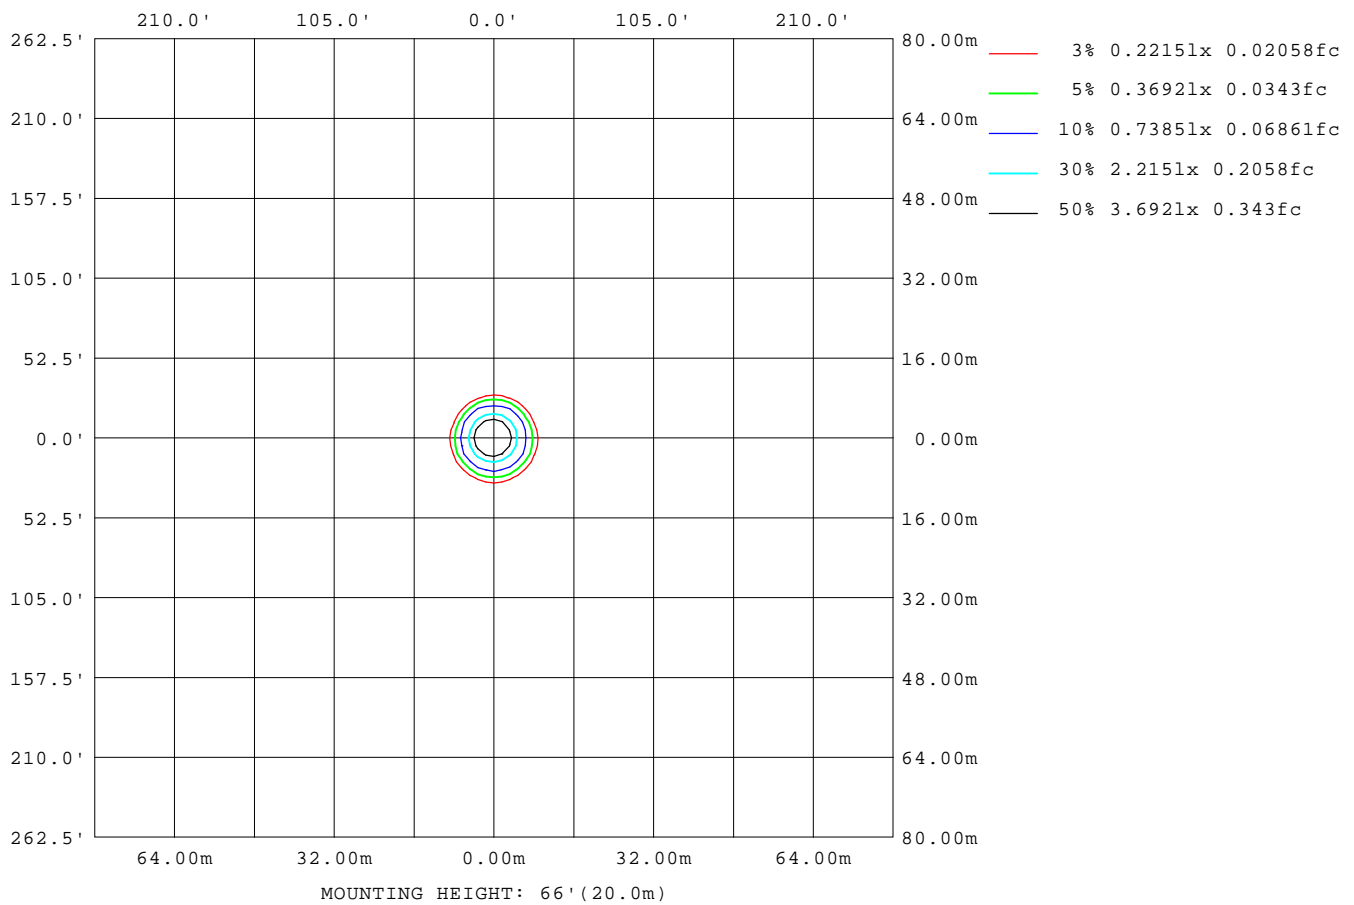

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30G06T0-C-83 Ra: 90
LENS: WT-25@12-24COBL4-Y1 24R
DRIVER: LS-8-200LI1 EXC 200mA
30minutes warm-up

LED Avg.L Report

Test:U:220.21V I:0.0403A P:8.5361W PF:0.9601 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210246
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	492
L_0~180(75)av	117
L_0~180(85)av	28
L_90~270(65)av	505
L_90~270(75)av	100
L_90~270(85)av	25
L_45(65)av	496
L_45(75)av	97
L_45(85)av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90
LENS:WT-25@12-24COBL4-Y1 24R
DRIVER:LS-8-200LI1 EXC 200mA
30minutes warm-up

Planar Illuminance Curve

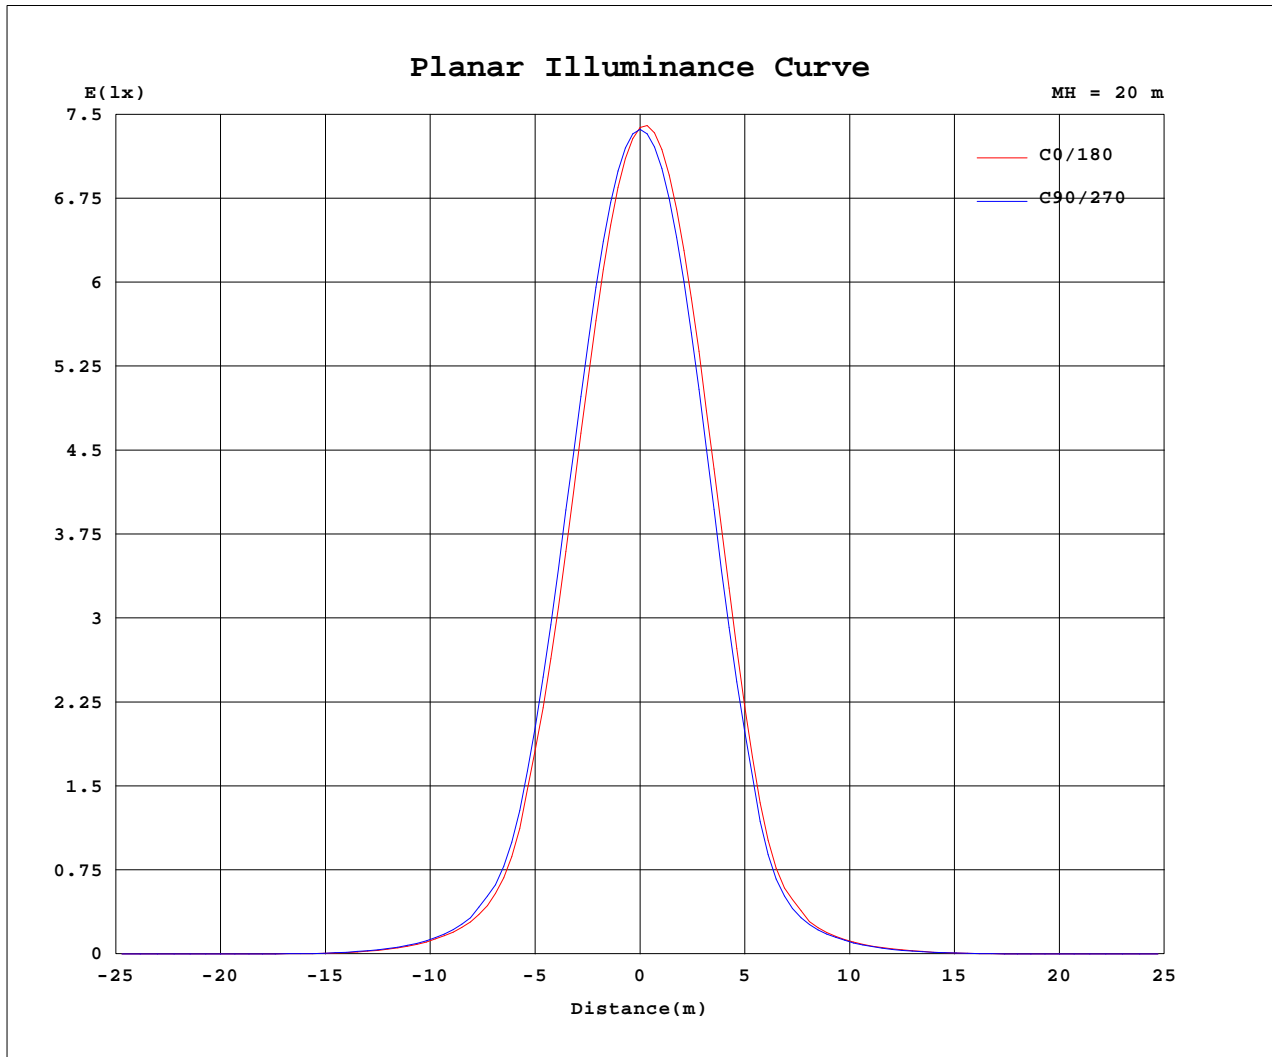

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2025-4-21

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXRH-30G06T0-C-83 Ra: 90
 LENS: WT-25@12-24COBL4-Y1 24R
 DRIVER: LS-8-200LI1 EXC 200mA
 30minutes warm-up

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.21V I:0.0403A P:8.5361W PF:0.9601 Freq:49.99Hz Lamp Flux:809.024x1 lm		
NAME: D55	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504210246
MFR.: RISE	SUR.: 0.001074665m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2950	2950	2950	2950	2950	2950	2950	2950	2950	2950	2950	2950						
5	2470	2489	2518	2579	2627	2676	2689	2668	2650	2593	2546	2491						
10	1504	1544	1568	1662	1722	1798	1812	1777	1746	1666	1612	1529						
15	653	670	691	728	771	793	780	765	736	706	689	661						
20	209	234	228	250	232	248	235	203	220	196	220	200						
25	88.7	91.6	92.9	96.4	92.8	91.1	84.8	81.9	80.7	80.9	82.0	84.5						
30	34.3	36.3	37.0	38.0	37.5	38.0	35.5	33.8	34.3	32.7	33.5	33.4						
35	10.2	10.6	11.2	11.6	11.9	12.8	12.2	12.0	12.2	11.1	11.0	10.6						
40	2.60	2.76	2.82	2.85	2.95	2.95	2.86	2.90	2.91	2.75	2.69	2.40						
45	1.05	1.24	1.17	1.21	1.23	1.09	0.92	0.97	0.98	1.05	1.14	1.00						
50	0.37	0.36	0.38	0.41	0.46	0.38	0.35	0.36	0.38	0.46	0.53	0.42						
55	0.34	0.33	0.35	0.36	0.39	0.37	0.33	0.33	0.38	0.41	0.44	0.40						
60	0.29	0.29	0.29	0.32	0.32	0.32	0.29	0.31	0.34	0.40	0.37	0.33						
65	0.21	0.21	0.21	0.22	0.22	0.23	0.23	0.24	0.24	0.24	0.23	0.23						
70	0.06	0.06	0.07	0.07	0.08	0.08	0.10	0.10	0.09	0.08	0.07	0.07						
75	0.03	0.02	0.02	0.03	0.03	0.03	0.04	0.03	0.03	0.03	0.02	0.02						
80	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00						
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-4-21

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G06T0-C-83 Ra:90
LENS:WT-25@12-24COBL4-Y1 24R
DRIVER:LS-8-200LI1 EXC 200mA
30minutes warm-up