

## Luminaire Photograph



Light Output Ratio:	67.0%	
Luminaire Power:	14.69 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.60	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-4-19

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G10TH-A-83 Ra: 90  
LENS: WT-35@17-36COBL6-Y1 36R  
DRIVER: LS-15-350LI1 EXC 350mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

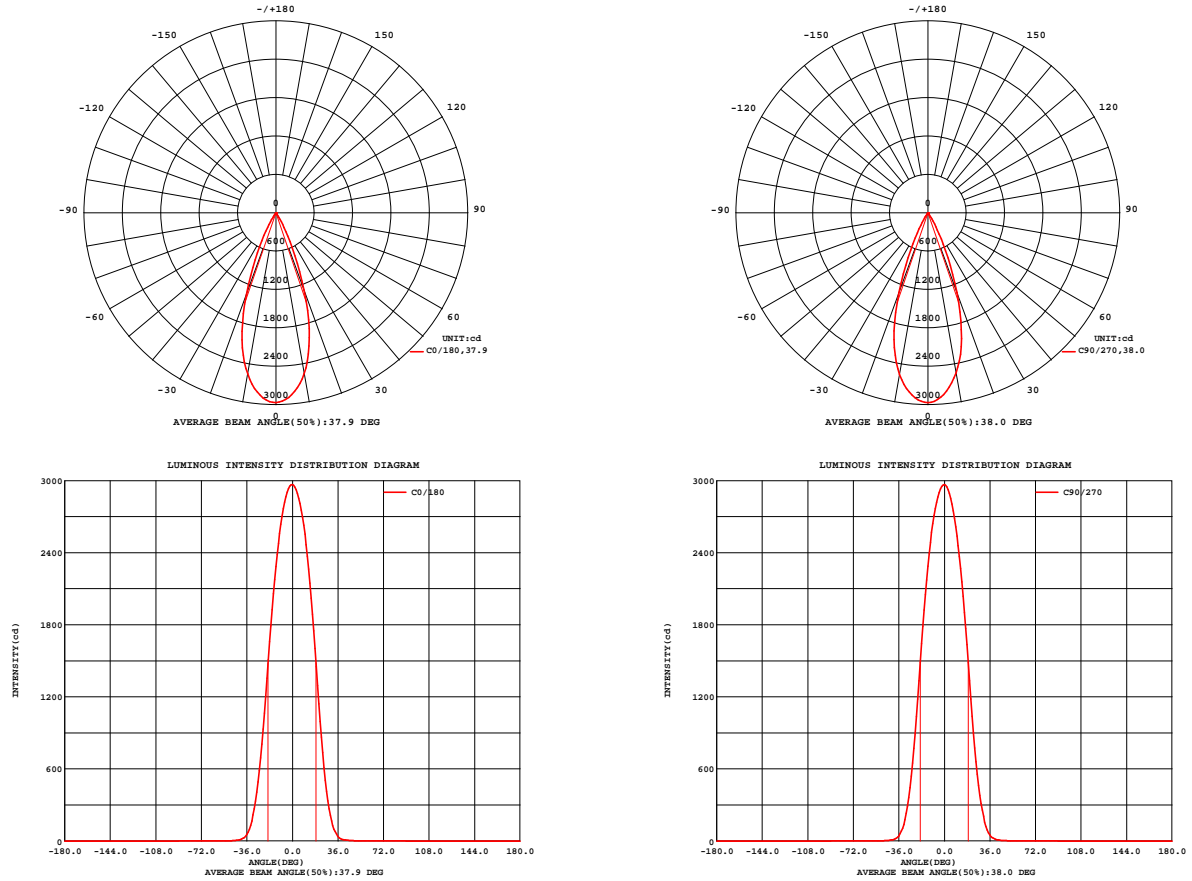


Fig. C0/C180

Fig. C90/C270

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-4-19

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G10TH-A-83 Ra: 90  
LENS: WT-35@17-36COBL6-Y1 36R  
DRIVER: LS-15-350LI1 EXC 350mA  
30minutes warm-up


## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.18V I:0.0688A P:14.692W PF:0.9673 Freq:49.99Hz  
Lamp Flux:1765.61x1 lm


NAME: D75	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504190242
MFR.: RISE	SUR.: 0.0038465m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 80.49 lm/W			
MODEL	Brideglux	Imax(cd)	2966	S/MH(C0/180)	0.60
NOMINAL POWER(W)	15	LOR(%)	67.0	S/MH(C90/270)	0.59
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1182.6	$\eta$ UP,DN(C0-180)	0.0,33.4
NOMINAL FLUX(lm)	1765.61	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,33.5
LAMPS INSIDE	1	$\eta$ up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	$\eta$ down(%)	67.0	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

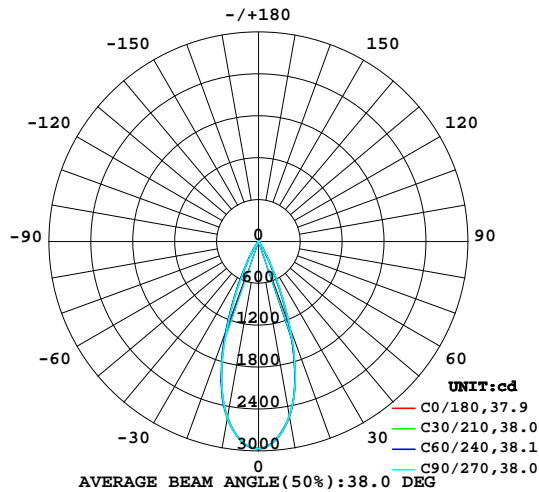

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

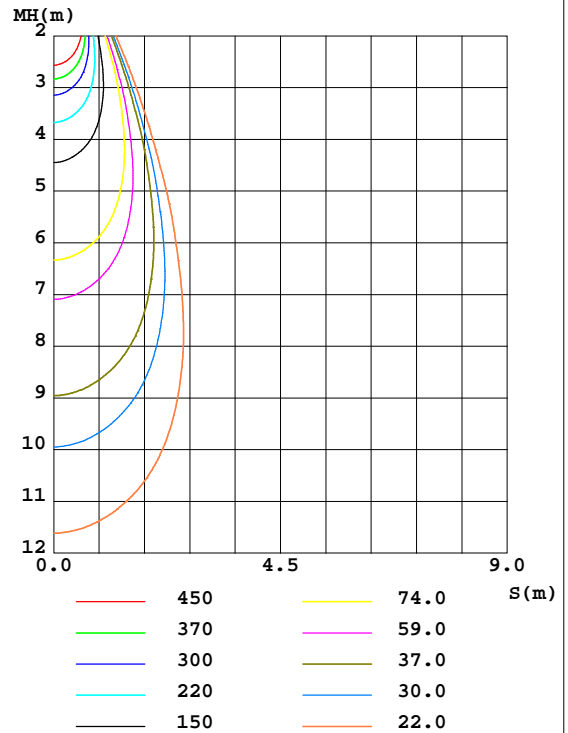

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-19

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90  
LENS:WT-35@17-36COBL6-Y1 36R  
DRIVER:LS-15-350LI1 EXC 350mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	2553	2542	2539	2557	2559	2566	2569	2565	0- 10	263.2	263.2	22.3,14.9
20	1294	1313	1334	1357	1355	1356	1333	1308	10- 20	550.7	813.9	68.8,46.1
30	213.3	229.7	257.7	273.9	268.1	258.8	229.2	224.5	20- 30	309.0	1123	95,63.6
40	12.43	13.52	17.38	18.63	17.60	15.82	12.84	11.84	30- 40	52.19	1175	99.4,66.6
50	2.338	2.429	2.470	2.400	2.147	2.085	2.065	2.119	40- 50	4.417	1180	99.7,66.8
60	1.800	1.871	1.867	1.800	1.622	1.571	1.564	1.650	50- 60	1.791	1181	99.9,66.9
70	0.4435	0.4569	0.4558	0.3831	0.3066	0.2876	0.3133	0.3508	60- 70	1.015	1182	100,67
80	0.0636	0.0556	0.0639	0.0500	0.0488	0.0403	0.0517	0.0508	70- 80	0.1668	1183	100,67
90	0	0	0	0	0	0	0	0	80- 90	0.0252	1183	100,67
100	0	0	0	0	0	0	0	0	90-100	0	1183	100,67
110	0	0	0	0	0	0	0	0	100-110	0	1183	100,67
120	0	0	0	0	0	0	0	0	110-120	0	1183	100,67
130	0	0	0	0	0	0	0	0	120-130	0	1183	100,67
140	0	0	0	0	0	0	0	0	130-140	0	1183	100,67
150	0	0	0	0	0	0	0	0	140-150	0	1183	100,67
160	0	0	0	0	0	0	0	0	150-160	0	1183	100,67
170	0	0	0	0	0	0	0	0	160-170	0	1183	100,67
180	0	0	0	0	0	0	0	0	170-180	0	1183	100,67
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-19

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90  
LENS:WT-35@17-36COBL6-Y1 36R  
DRIVER:LS-15-350LI1 EXC 350mA  
30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:220.18V I:0.0688A P:14.692W PF:0.9673 Freq:49.99Hz  
Lamp Flux:1765.6lx1 lm

NAME: D75

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2504190242

MFR.: RISE

SUR.: 0.0038465m2

Shielding Angle:

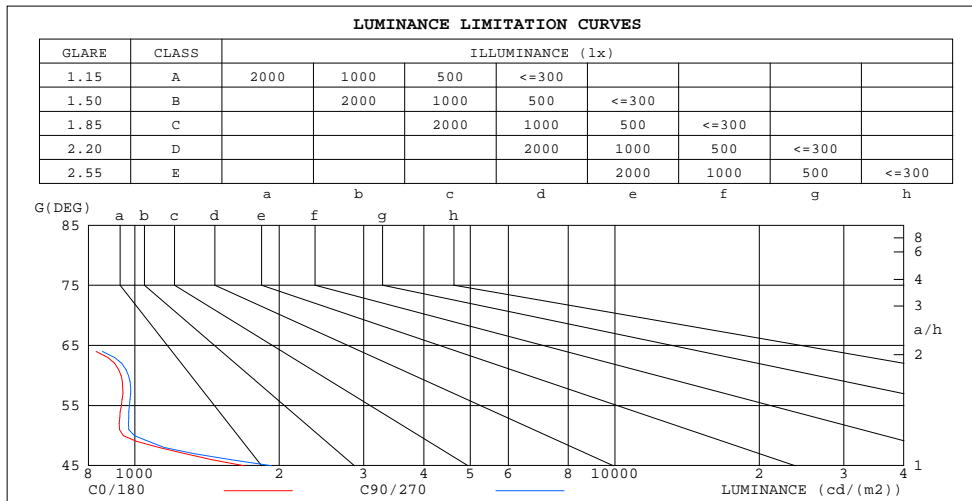

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-19


γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90  
LENS:WT-35@17-36COBL6-Y1 36R  
DRIVER:LS-15-350LI1 EXC 350mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.18V I:0.0688A P:14.692W PF:0.9673 Freq:49.99Hz  
Lamp Flux:1765.61lx1 lm

NAME: D75	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504190242
MFR.: RISE	SUR.: 0.0038465m2	Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

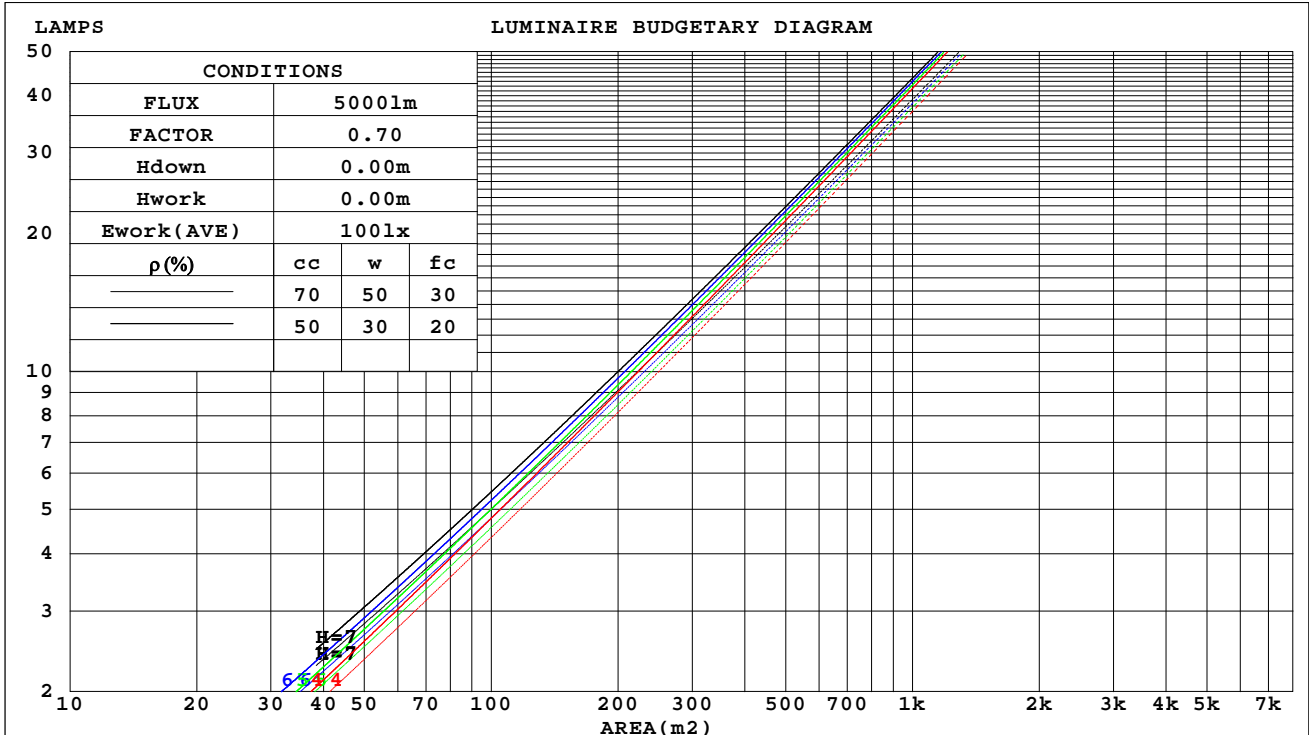

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-19

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90  
LENS:WT-35@17-36COBL6-Y1 36R  
DRIVER:LS-15-350LI1 EXC 350mA  
30minutes warm-up

## WEC AND CCEC

Test:U:220.18V I:0.0688A P:14.692W PF:0.9673 Freq:49.99Hz Lamp Flux:1765.61x1 lm		
NAME: D75	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504190242
MFR.: RISE	SUR.: 0.0038465m2	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.099	.056	.018	.094	.054	.017	.086	.049	.016	.078	.045	.014	.071	.041	.013	
2.0	.092	.050	.015	.088	.049	.015	.082	.045	.014	.075	.042	.013	.069	.039	.012	
3.0	.087	.046	.014	.083	.045	.013	.078	.042	.013	.072	.040	.012	.067	.037	.012	
4.0	.082	.042	.012	.079	.041	.012	.074	.039	.012	.070	.037	.011	.065	.035	.011	
5.0	.077	.039	.011	.075	.039	.011	.071	.037	.011	.067	.035	.011	.063	.034	.010	
6.0	.074	.037	.011	.072	.036	.010	.068	.035	.010	.065	.034	.010	.061	.032	.010	
7.0	.070	.035	.010	.069	.034	.010	.065	.033	.010	.062	.032	.009	.060	.031	.009	
8.0	.067	.033	.009	.066	.032	.009	.063	.031	.009	.060	.031	.009	.058	.030	.009	
9.0	.065	.031	.009	.063	.031	.009	.061	.030	.009	.058	.029	.008	.056	.029	.008	
10.0	.062	.030	.008	.061	.029	.008	.059	.029	.008	.057	.028	.008	.055	.027	.008	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.128	.128	.128	.109	.109	.109	.074	.074	.074	.043	.043	.043	.014	.014	.014		
1.0	.113	.106	.099	.097	.091	.085	.066	.062	.059	.038	.036	.034	.012	.012	.011		
2.0	.102	.089	.078	.087	.076	.068	.060	.053	.047	.034	.031	.028	.011	.010	.009		
3.0	.092	.076	.063	.079	.065	.055	.054	.045	.038	.031	.027	.023	.010	.009	.007		
4.0	.084	.066	.052	.072	.057	.045	.050	.040	.032	.029	.023	.019	.009	.008	.006		
5.0	.077	.058	.043	.066	.050	.037	.046	.035	.026	.027	.020	.016	.009	.007	.005		
6.0	.072	.051	.036	.062	.044	.032	.043	.031	.022	.025	.018	.013	.008	.006	.004		
7.0	.067	.046	.031	.058	.040	.027	.040	.028	.019	.023	.016	.011	.007	.005	.004		
8.0	.063	.041	.026	.054	.036	.023	.037	.025	.016	.022	.015	.010	.007	.005	.003		
9.0	.059	.038	.023	.051	.033	.020	.035	.023	.014	.021	.014	.008	.007	.004	.003		
10.0	.056	.035	.020	.048	.030	.018	.034	.021	.012	.020	.012	.007	.006	.004	.002		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-19

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90  
LENS:WT-35@17-36COBL6-Y1 36R  
DRIVER:LS-15-350LI1 EXC 350mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:220.18V I:0.0688A P:14.692W PF:0.9673 Freq:49.99Hz Lamp Flux:1765.61x1 lm										
NAME: D75			TYPE:			WEIGHT:				
SPEC.: 3000K			DIM.:			SERIAL No.: 2504190242				
MFR.: RISE			SUR.: 0.0038465m2			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.0	6.8	6.3	6.9	7.1	7.1	7.8	7.3	8.0	8.1
3H	5.9	6.6	6.2	6.8	7.0	7.0	7.6	7.2	7.8	8.0
4H	5.8	6.5	6.1	6.7	6.9	6.9	7.5	7.1	7.7	7.9
6H	5.8	6.4	6.0	6.6	6.8	6.8	7.4	7.1	7.6	7.9
8H	5.7	6.3	6.0	6.5	6.8	6.7	7.3	7.0	7.6	7.8
12H	5.7	6.2	6.0	6.5	6.8	6.7	7.3	7.0	7.5	7.8
4H 2H	5.8	6.5	6.1	6.7	6.9	6.9	7.5	7.1	7.7	7.9
3H	5.7	6.3	6.0	6.5	6.8	6.7	7.3	7.0	7.6	7.8
4H	5.6	6.1	6.0	6.4	6.7	6.6	7.1	7.0	7.4	7.7
6H	5.5	6.0	5.9	6.3	6.6	6.5	7.0	6.9	7.3	7.7
8H	5.5	5.9	5.8	6.2	6.6	6.5	6.9	6.9	7.3	7.6
12H	5.4	5.8	5.8	6.2	6.5	6.4	6.8	6.8	7.2	7.6
8H 4H	5.5	5.9	5.8	6.2	6.6	6.5	6.9	6.9	7.3	7.6
6H	5.4	5.7	5.8	6.1	6.5	6.4	6.7	6.8	7.1	7.5
8H	5.3	5.6	5.7	6.0	6.5	6.3	6.6	6.8	7.0	7.5
12H	5.2	5.5	5.7	5.9	6.4	6.3	6.5	6.7	7.0	7.4
12H 4H	5.4	5.8	5.8	6.2	6.5	6.4	6.8	6.8	7.2	7.6
6H	5.3	5.6	5.7	6.0	6.5	6.3	6.6	6.8	7.0	7.5
8H	5.2	5.5	5.7	5.9	6.4	6.3	6.5	6.7	7.0	7.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.6 / - 5.8					+ 4.4 / - 6.7				
1.5H	+ 6.2 / - 5.5					+ 7.1 / - 6.5				
2.0H	+ 2.0 / - 1.4					+ 2.7 / - 1.6				

CIE Pub.117, 1766 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.0)  
Area: 0.0038465 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-19

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90  
LENS:WT-35@17-36COBL6-Y1 36R  
DRIVER:LS-15-350LI1 EXC 350mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:220.18V I:0.0688A P:14.692W PF:0.9673 Freq:49.99Hz Lamp Flux:1765.6lx1 lm		
NAME: D75	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504190242
MFR.: RISE	SUR.: 0.0038465m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	61	57	55	61	57	55	60	57	55	53
0.80	66	62	60	65	62	60	65	62	60	58
1.00	68	65	63	68	65	63	67	64	62	60
1.25	71	67	65	70	67	65	69	66	65	62
1.50	72	69	67	71	69	67	70	68	66	64
2.00	74	71	69	73	70	69	71	69	68	64
2.50	75	72	71	74	71	70	72	70	69	65
3.00	75	73	72	74	72	71	72	71	70	65
4.00	77	75	74	75	74	73	73	72	71	66
5.00	78	76	75	76	75	74	74	73	72	67
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-19

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90  
LENS:WT-35@17-36COBL6-Y1 36R  
DRIVER:LS-15-350LI1 EXC 350mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:220.18V I:0.0688A P:14.692W PF:0.9673 Freq:49.99Hz Lamp Flux:1765.6lx1 lm		
NAME: D75	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504190242
MFR.: RISE	SUR.: 0.0038465m2	Shielding Angle:

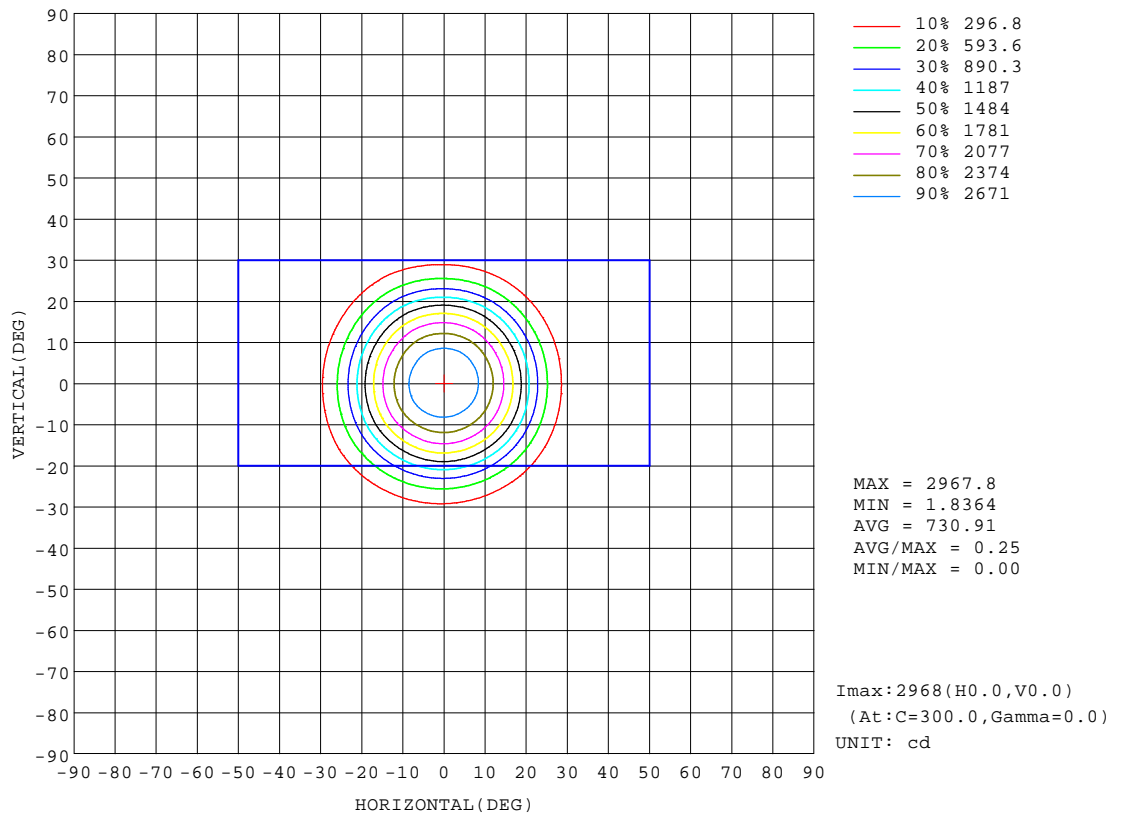


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:zoe  
 Test Date:2025-4-19

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:3.160m [K=1.0000]  
 Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90  
 LENS:WT-35@17-36COBL6-Y1 36R  
 DRIVER:LS-15-350LI1 EXC 350mA  
 30minutes warm-up

### AAI Figure

Test:U:220.18V I:0.0688A P:14.692W PF:0.9673 Freq:49.99Hz Lamp Flux:1765.61lx1 lm		
NAME: D75	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504190242
MFR.: RISE	SUR.: 0.0038465m2	Shielding Angle:

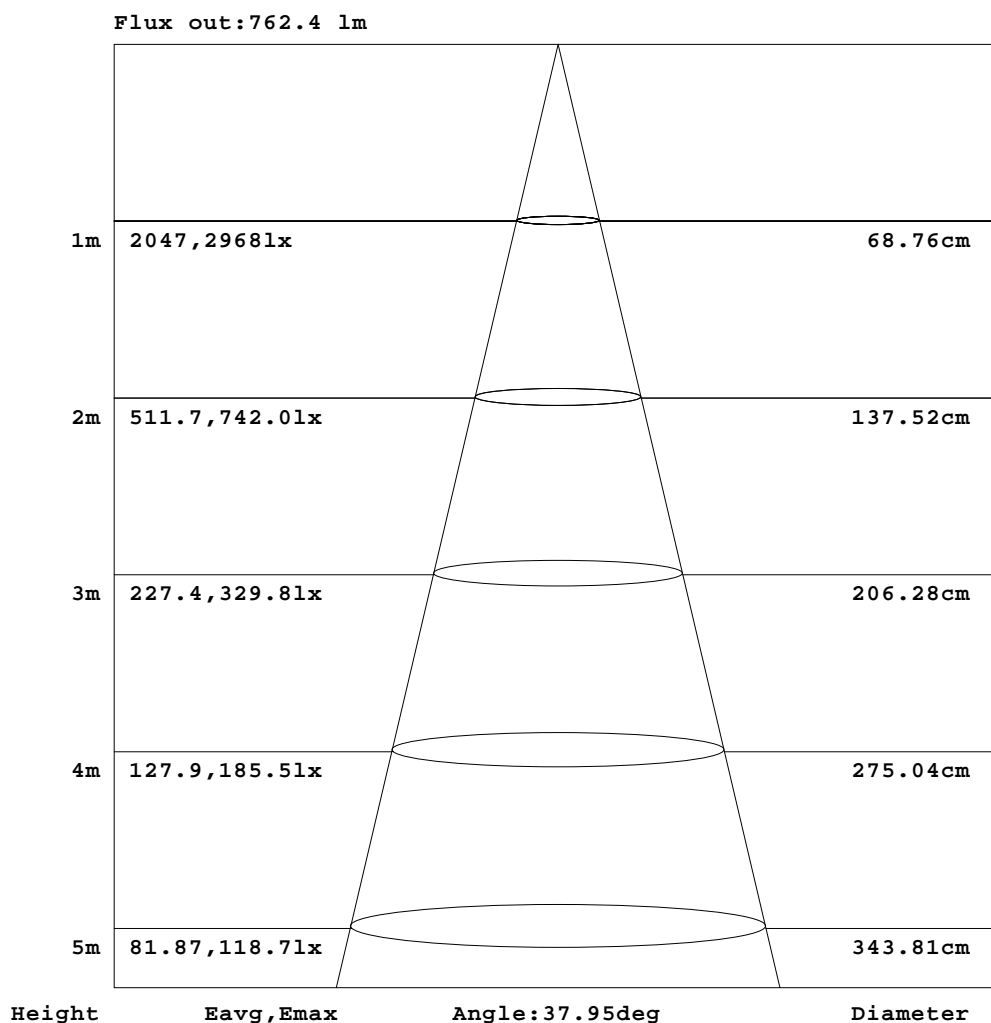


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-19

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90  
LENS:WT-35@17-36COBL6-Y1 36R  
DRIVER:LS-15-350LI1 EXC 350mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:220.18V I:0.0688A P:14.692W PF:0.9673 Freq:49.99Hz Lamp Flux:1765.61x1 lm		
NAME: D75	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504190242
MFR.: RISE	SUR.: 0.0038465m2	Shielding Angle:

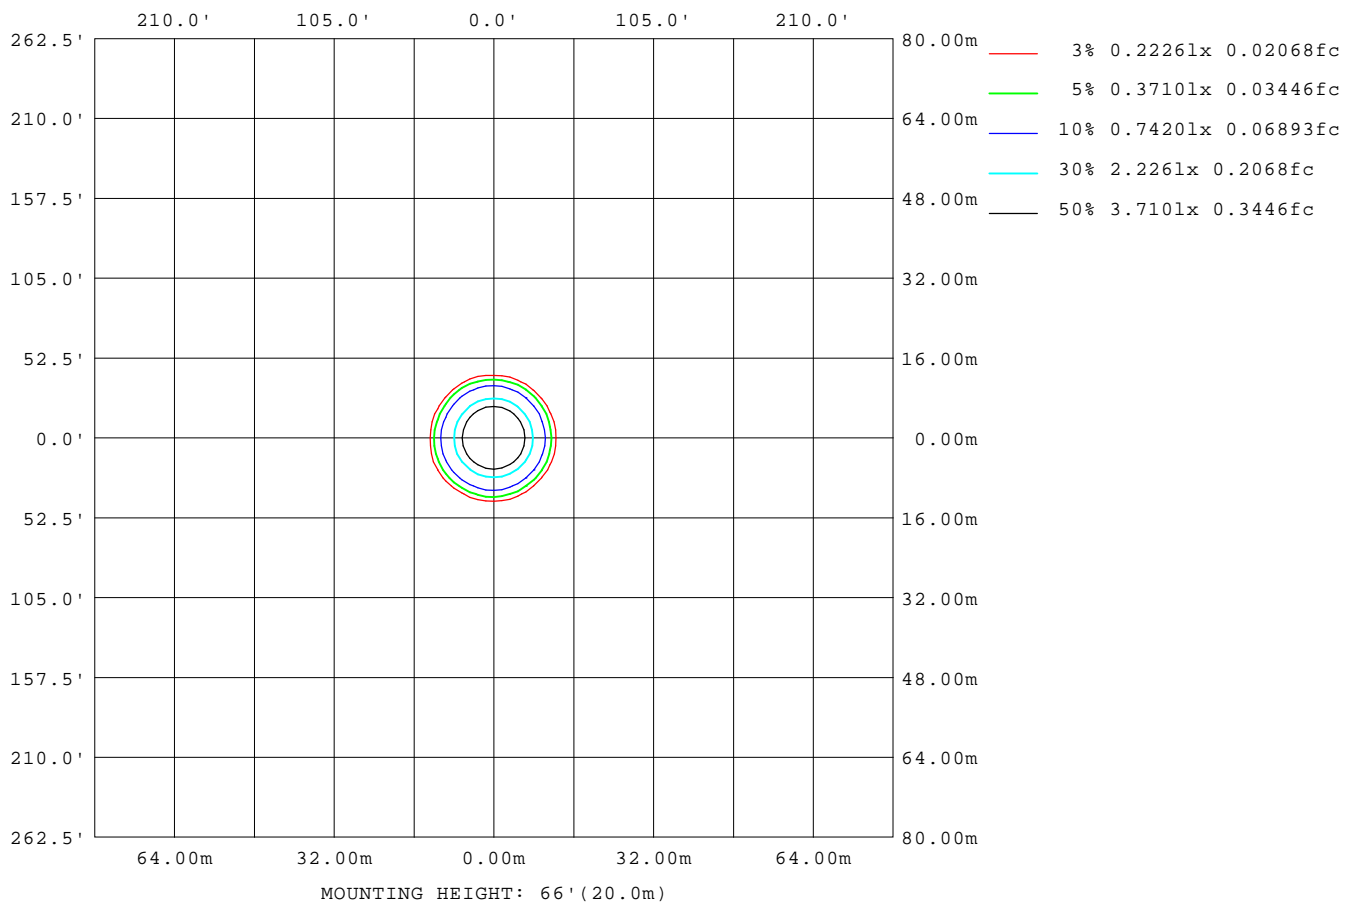

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3 °C  
Operators:zoe  
Test Date:2025-4-19

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90  
LENS:WT-35@17-36COBL6-Y1 36R  
DRIVER:LS-15-350LI1 EXC 350mA  
30minutes warm-up

## LED Avg.L Report

Test:U:220.18V I:0.0688A P:14.692W PF:0.9673 Freq:49.99Hz Lamp Flux:1765.61x1 lm		
NAME: D75	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504190242
MFR.: RISE	SUR.: 0.0038465m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	625
L_0~180(75)av	139
L_0~180(85)av	80
L_90~270(65)av	631
L_90~270(75)av	138
L_90~270(85)av	80
L_45(65)av	609
L_45(75)av	129
L_45(85)av	48

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-19

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90  
LENS:WT-35@17-36COBL6-Y1 36R  
DRIVER:LS-15-350LI1 EXC 350mA  
30minutes warm-up

## Planar Illuminance Curve

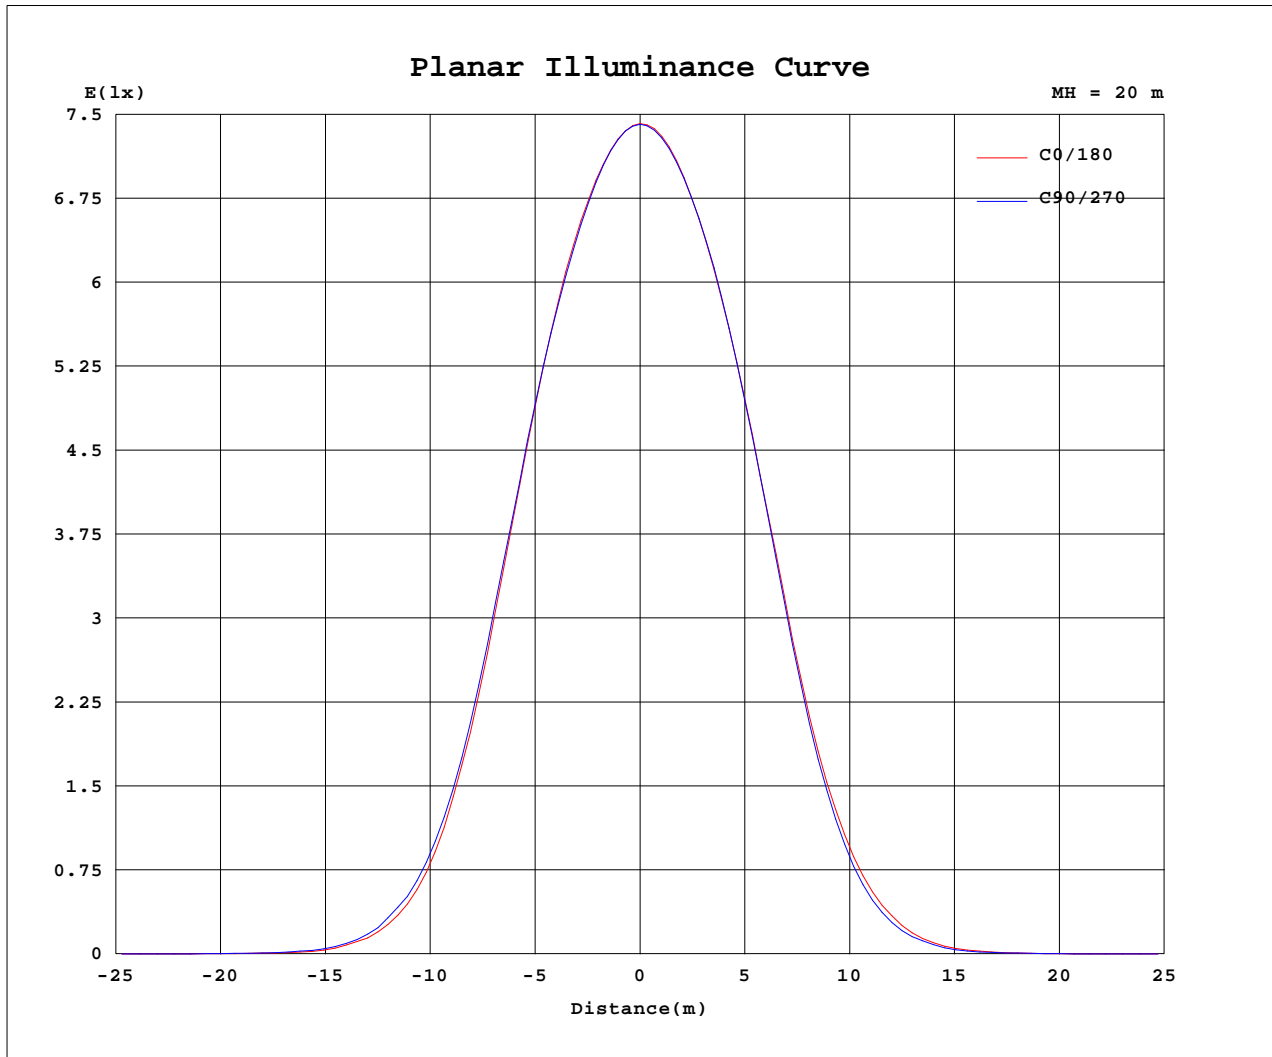

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2025-4-19

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRE-30G10TH-A-83 Ra: 90  
 LENS: WT-35@17-36COBL6-Y1 36R  
 DRIVER: LS-15-350LI1 EXC 350mA  
 30minutes warm-up



## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.18V I:0.0688A P:14.692W PF:0.9673 Freq:49.99Hz Lamp Flux:1765.61x1 lm		
NAME: D75	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2504190242
MFR.: RISE	SUR.: 0.0038465m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2966	2966	2966	2966	2966	2966	2966	2966	2966	2966	2966	2966						
5	2853	2851	2846	2852	2858	2867	2866	2863	2866	2862	2862	2856						
10	2553	2547	2538	2539	2547	2566	2559	2558	2574	2569	2571	2558						
15	2020	2029	2025	2036	2040	2069	2057	2052	2071	2051	2043	2018						
20	1294	1320	1306	1334	1339	1374	1355	1345	1367	1333	1328	1288						
25	609	628	627	659	686	705	693	684	686	649	640	610						
30	213	231	229	258	262	286	268	251	266	229	235	214						
35	59.3	58.8	67.1	69.1	79.1	84.2	73.3	71.1	69.2	62.3	55.7	59.4						
40	12.4	13.1	14.0	17.4	16.7	20.5	17.6	14.8	16.9	12.8	12.0	11.7						
45	4.59	4.81	5.13	5.24	5.18	5.25	4.19	3.97	4.22	3.94	3.91	4.12						
50	2.34	2.42	2.44	2.47	2.43	2.37	2.15	2.09	2.08	2.07	2.08	2.16						
55	2.07	2.12	2.16	2.15	2.12	2.09	1.93	1.88	1.89	1.86	1.88	1.97						
60	1.80	1.86	1.89	1.87	1.83	1.77	1.62	1.57	1.58	1.56	1.60	1.70						
65	1.18	1.26	1.18	1.22	1.11	0.97	0.85	0.80	0.78	0.83	0.89	0.96						
70	0.44	0.46	0.45	0.46	0.41	0.36	0.31	0.29	0.29	0.31	0.34	0.37						
75	0.16	0.16	0.15	0.16	0.14	0.12	0.11	0.10	0.10	0.12	0.12	0.14						
80	0.06	0.06	0.05	0.06	0.06	0.04	0.05	0.04	0.04	0.05	0.05	0.05						
85	0.03	0.02	0.02	0.03	0.02	0.02	0.02	0.01	0.01	0.03	0.02	0.02						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-4-19

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G10TH-A-83 Ra:90  
LENS:WT-35@17-36COBL6-Y1 36R  
DRIVER:LS-15-350LI1 EXC 350mA  
30minutes warm-up